

BOE**PROPRIETARY NOTE**

THIS SPECIFICATION IS THE PROPERTY OF BOEFZ AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOEFZ AND MUST BE RETURNED TO BOEFZ UPON ITS REQUEST

SPEC. NUMBER
NO. XX-XX-XX-XXXPRODUCT GROUP
TFT-LCD

Rev. 0

ISSUE DATE
2020.04.08PAGE
1 OF 29**TITLE :****DV150X0M-N12 Product Specification**

Fuzhou BOE Optoelectronics Technology Co.,Ltd

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2020.04.08
SPEC. NUMBER NO. XX-XX-XX-XXX	SPEC. TITLE DV150X0M-N12 Product Specification		PAGE 2 OF 29

REVISION HISTORY

REV.	ECN No.	DESCRIPTION OF CHANGES	DATE	PREPARED
0	-	Final Release	2020.04.08	Yue You Zheng
.....				

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2020.04.08

SPEC. NUMBER

SPEC. TITLE

PAGE

NO. XX-XX-XX-XXX

DV150X0M-N12 Product Specification

3 OF 29

Contents

No	ITEM	Page
	REVISIONS HISTORY	2
	CONTENTS	3
1	GENERAL DESCRIPTION	4
	1.1 Introduction	
	1.2 Features	
	1.3 Applications	
	1.4 General Specification	
2	ABSOLUTE MAXIMUM RATINGS	6
3	ELECTRICAL SPECIFICATIONS	7
	3.1 TFT LCD Open Cell	
	3.2 Backlight Unit	
4	INTERFACE CONNECTION	9
	4.1 Open Cell Input Signal & Power	
	4.2 BIST Pattern	
	4.3 eDP Rx Interface Timing Parameter	
	4.4 eDP Rx Interface Eye Diagram	
5	SIGNAL TIMING SPECIFICATIONS	13
	5.1 Power Sequence	
6	OPTICAL SPECIFICATIONS	14
7	MECHANICAL CHARACTERISTICS	16
8	RELIABILITY TEST	17
9	PRODCUT SERIAL NUMBER	18
10	PACKING INFORMATION	19
11	PRECAUTIONS	21
12	APPENDIX	26

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2020.04.08

SPEC. NUMBER

SPEC. TITLE

PAGE

NO. XX-XX-XX-XXX


DV150X0M-N12 Product Specification

4 OF 29

1.0 GENERAL DESCRIPTION

1.1 Introduction

DV150X0M-N12 is a color active matrix TFT LCD MDL using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This MDL has a 15 inch diagonally measured active area with XGA resolutions (1024 horizontal by 768 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripe and this module can display 16.7M colors. The TFT-LCD MDL panel is adapted for a low reflection and higher color type.

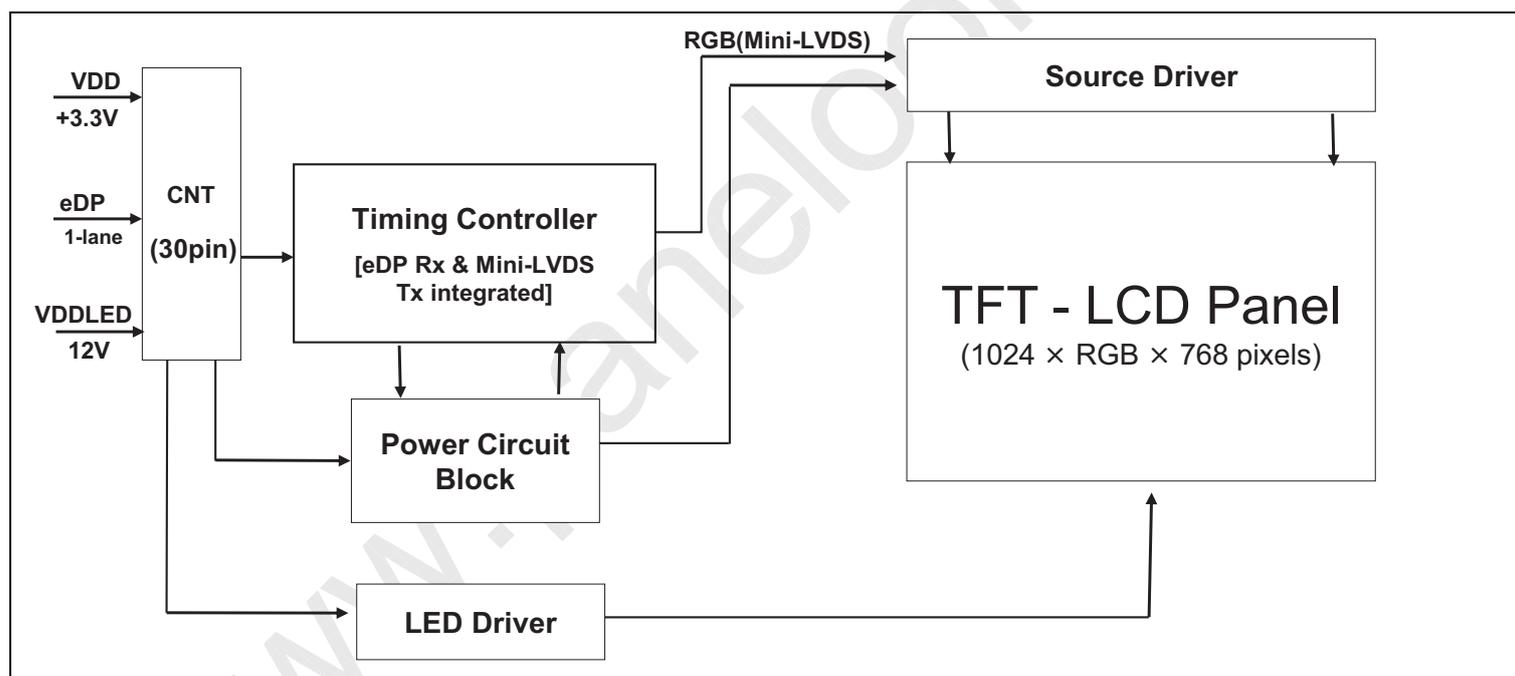

1.2 Features

- eDP interface with 1-lane
- High-speed response
- Low color shift image quality
- 6-bit +FRC color depth, display 16.7M colors
- Wide viewing angle
- DE (Data Enable) only mode
- ADS technology is applied for high display quality
- RoHS compliant

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2020.04.08

SPEC. NUMBER
NO. XX-XX-XX-XXXSPEC. TITLE
DV150X0M-N12 Product SpecificationPAGE
5 OF 29

1.3 Application

- Commercial Digital Display
- Display Terminals for Control System
- Landscape and Portrait Display

1.4 General Specification

< Table 1. General Specifications >

Parameter	Specification	Unit	Remarks
Active area	304.128(H) × 228.096(V)	mm	
Number of pixels	1024(H) × 768(V)	pixels	
Pixel pitch	0.099(H) × 0.297(V)	mm	
Pixel arrangement	Pixels RGB Vertical stripe		
Display colors	16.7M	colors	6bits+FRC
Display mode	Normally Black		
Dimensional outline	326.5(H) × 253.5(V) × 9.7(Total)	mm	Detail refer to drawing
Weight	930	g	
Power Consumption	8.72	Watt	Typ.
Bezel width (L/R/U/D)	10/10/11.7/11.7	mm	
Surface Treatment	Haze 25%, 3H		
Back-light	E-LED Light bar Type		
LED life	50000		
Display Direction	landscape & Portrait		

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2020.04.08

SPEC. NUMBER
NO. XX-XX-XX-XXXSPEC. TITLE
DV150X0M-N12 Product SpecificationPAGE
6 OF 29

2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceeded, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.


< Table 2. Open Cell Electrical Specifications >

[VSS=GND=0V]

Parameter	Symbol	Min.	Max.	Unit	Remark
Power Supply Voltage	VDD	-0.3	4	V	Ta = 25 °C
Operating Temperature	T _{OP}	-20	+70	°C	Note 1
Storage Temperature	T _{SUR}	-20	+70	°C	
	T _{ST}	-20	+70	°C	
Operating Ambient Humidity	Hop	10	80	%RH	
Storage Humidity	Hst	10	80	%RH	

Note 1 : Temperature and relative humidity range are shown in the figure below.

Wet bulb temperature should be 39 °C max. and no condensation of water.

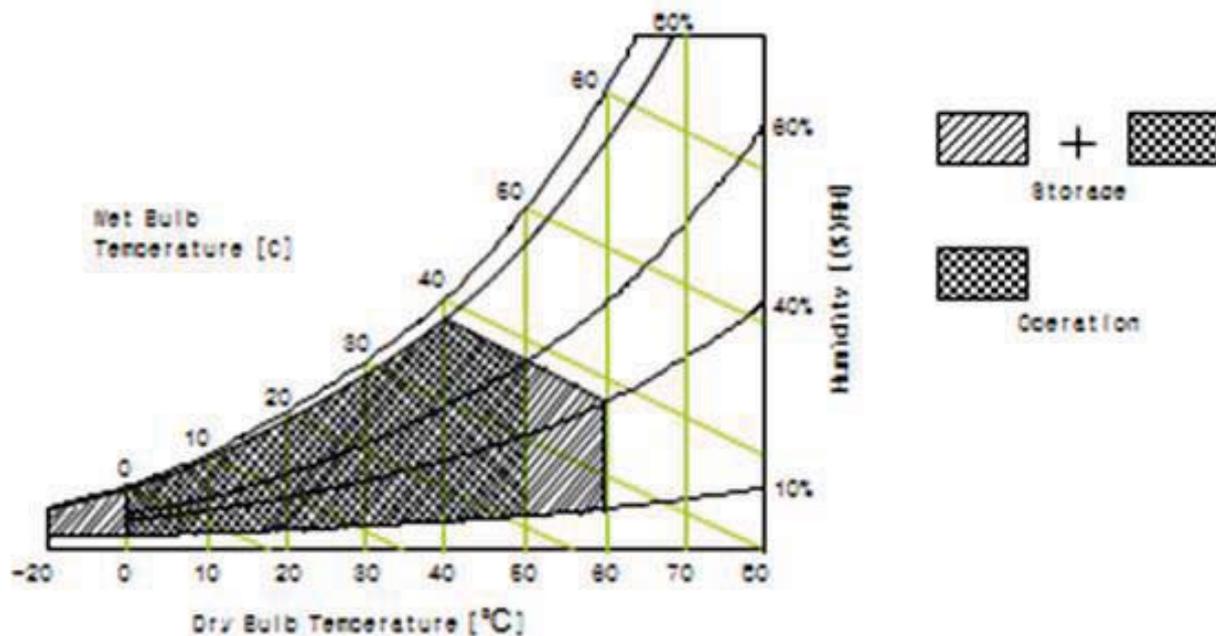

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2020.04.08

SPEC. NUMBER
NO. XX-XX-XX-XXXSPEC. TITLE
DV150X0M-N12 Product SpecificationPAGE
7 OF 29**3.0 ELECTRICAL SPECIFICATIONS****3.1 TFT LCD Open Cell**

< Table 3. Open Cell Electrical Specifications >

[Ta =25±2 °C]

Parameter		Symbol	Values			Unit	Remark
			Min	Typ	Max		
Power Supply Input Voltage		VDD	3.0	3.3	3.6	V	Note 1
Power Supply Current		IDD	-	410	740	mA	
Power Supply Ripple Voltage		VRP	-	-	300	mV	
Rush Current		IRUSH	-	2	3	A	Note 2
eDP Interface	Differential peak-to-peak input voltage at package pins	VLV	100	-	1300	mV	
	Rx input DC common mode voltage	VRC	0	-	2	V	
CMOS Interface	Input High Threshold Voltage	VIH	0.7VDD	-	VDD	V	
	Input Low Threshold Voltage	VIL	0	-	0.3VDD	V	
Power Consumption		PD		0.8	1.3	W	
		PBL		7.92	8.71		Note 3
		Ptotal		8.72	10.1		



Note 1 : The supply voltage is measured and specified at the interface connector of LCM.

The current draw and power consumption specified is for VDD=3.3V,

Test Pattern of power supply current

a) Typ : Mosaic 7X5 (L0/L255)

b) Max : Vline Subline (L255)

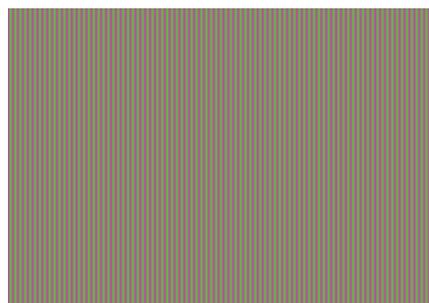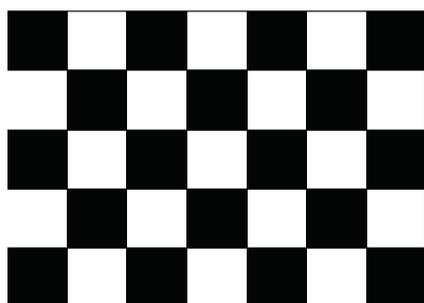

Note 2 : The duration of rush current is about 2ms and rising time of Power Input is 1ms(min)

Note 3 : Calculated value for reference (Input pins*VPIN ×IPIN) excluding inverter loss.

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2020.04.08

SPEC. NUMBER
NO. XX-XX-XX-XXXSPEC. TITLE
DV150X0M-N12 Product SpecificationPAGE
8 OF 29

3.0 ELECTRICAL SPECIFICATIONS

3.2 Backlight Unit

< Table 4. Backlight Unit Electrical Specifications >

[Ta =25±2 °C]

Parameter		Min.	Typ.	Max.	Unit	Remarks	
LED Driver Power Supply Voltage		H_{VDD}	10.8	12	12.6	V	
LED Driver Power Supply Current		I_{HVDD}	550	600	700	mA	
EN Control Level	Backlight on	V_{ENH}	3	3.3	3.6	V	EN logic high voltage
	Backlight off	V_{ENL}	0	0	0.6	V	EN logic low voltage
PWM Control Level	PWM High Level	V_{PML}	3	3.3	3.6	V	
	PWM Low Level	V_{PML}	0	0	0.6	V	
PWM Control Frequency		F_{PWM}	0.12	-	1	KHz	
Duty Ratio		-	5	-	100	%	
LED Life-Time		N/A	50,000	-	-	Hour	Note4
LED Light Bar Input Voltage Per Input Pin		$VPIN$	32.4	36	39.6	V	
LED Light Bar Input Current Per Input Pin		$IPIN$	-	55	-	mA	Note2
LED Power Consumption		PBL	-	7.92	8.71	W	Note3

LED bar consists of 48LED packages,4 strings(parallel)*12packages(serial)

Note1: There are one light bar ,and the specified current is input LED chip 100% duty current

Note2: The sense current of each input pin is 55mA

Note3: $PBL=4 \text{ Input pins} \times VPIN \times IPIN$ Note4: The lifetime is determined as the time at which luminance of LED become 50% of the initial brightness or not normal lighting at $IPIN=55mA$ on condition of continuous operating at $25 \pm 2 \text{ } ^\circ\text{C}$

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2020.04.08

SPEC. NUMBER
NO. XX-XX-XX-XXXSPEC. TITLE
DV150X0M-N12 Product SpecificationPAGE
9 OF 29**4.0 INTERFACE CONNECTION****4.1 Open Cell Input Signal & Power**

- Input Connector : MSAK24025P30/20455-030E-66 or Compatible.

< Table 4. Open Cell Input Connector Pin Configuration >

Pin No	Symbol	Description	Pin No	Symbol	Description
1	NC	No Connectction	16	LCD_GND	LCD Logic and driver ground
2	H_GND	High Speed Ground	17	HPD	Hot plug detect output
3	NC	No Connectction	18	BL_GND	Backlight_ground
4	NC	No Connection	19	BL_GND	Backlight_ground
5	H_GND	High Speed Ground	20	BL_GND	Backlight_ground
6	Lane0_N	Comp Signal link Lane 0	21	BL_GND	Backlight_ground
7	Lane0_P	True Signal Link Lane 0	22	BL_ENABLE	LED enable pin(+3V~+5V Input)
8	H_GND	High Speed Ground	23	BL_PWR	System PWM Signal Input
9	AUX_CH_P	True Signal Auxiliary Ch.	24	NC	No Connectction
10	AUX_CH_N	Comp Signal Auxiliary Ch.	25	NC	No Connection
11	H_GND	High Speed Ground	26	BL_PWR	LED Power Supply 10.8V~12.6V
12	VDD	Power Supply,3.3V(typ.)	27	BL_PWR	LED Power Supply 10.8V~12.6V
13	VDD	Power Supply,3.3V(typ.)	28	BL_PWR	LED Power Supply 10.8V~12.6V
14	NC	No Connection	29	BL_PWR	LED Power Supply 10.8V~12.6V
15	LCD_GND	LCD Logic and driver ground	30	NC	No Connection

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT


0

2020.04.08

SPEC. NUMBER
NO. XX-XX-XX-XXXSPEC. TITLE
DV150X0M-N12 Product SpecificationPAGE
10 OF 29

4.2 BIST Pattern

< Table 5. Bist Pattern >

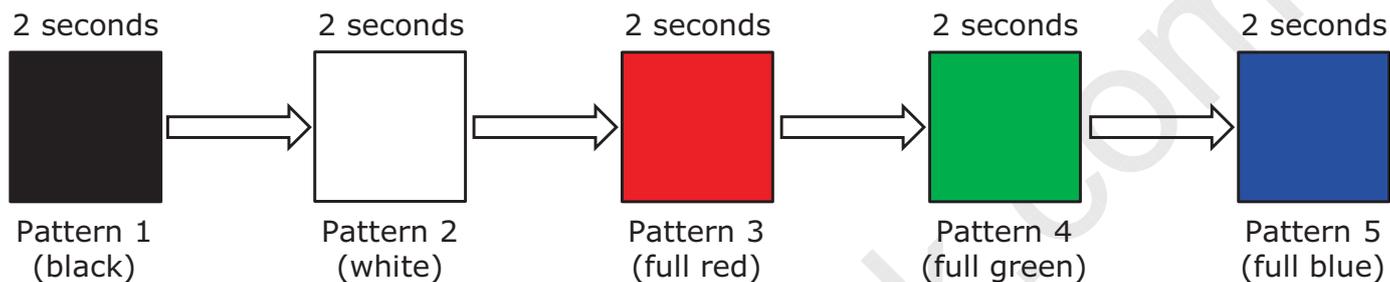

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

0


2020.04.08

SPEC. NUMBER
NO. XX-XX-XX-XXXSPEC. TITLE
DV150X0M-N12 Product SpecificationPAGE
11 OF 29

4.3 eDP Rx Interface Timing Parameter

The specification of the eDP Rx interface timing parameter is shown in Table 6.

<Table 6. eDP Rx Interface Timing Specification>

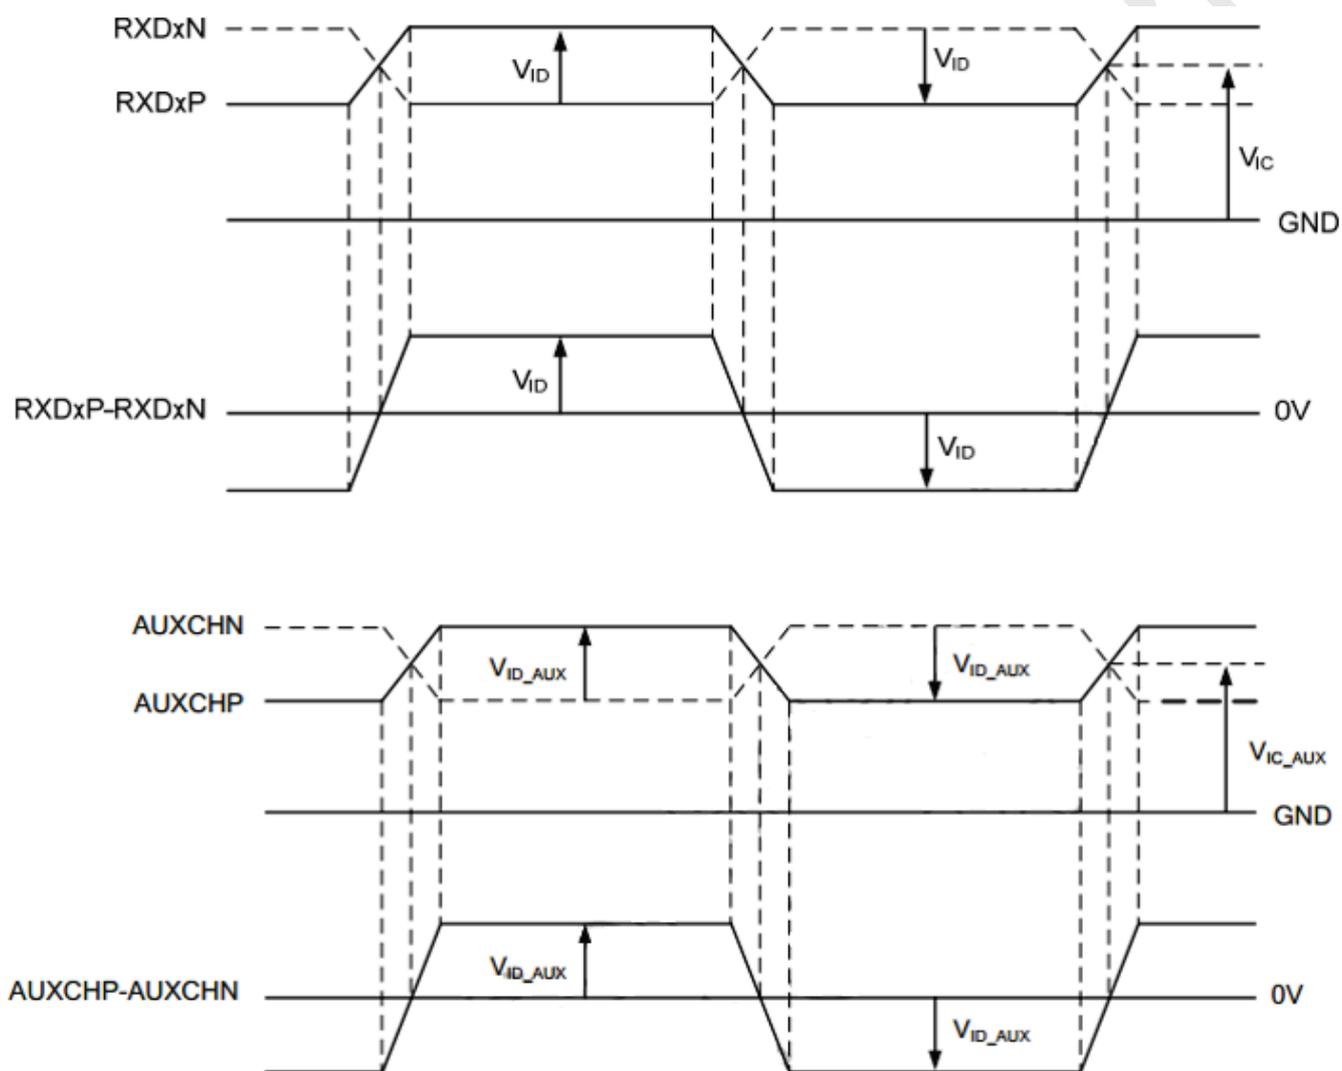

< Table 7. The specification of the eDP Rx interface timing parameter >

Parameter	Values			Units
	Min	Typ	Max	
V_{IC}	0	-	2.0	V
V_{ID}	± 60	-	± 600	mV
V_{IC_AUX}	0	-	2.0	V
V_{ID_AUX}	± 0.195	-	± 0.69	V

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2020.04.08

SPEC. NUMBER

SPEC. TITLE

PAGE


NO. XX-XX-XX-XXX

DV150X0M-N12 Product Specification

12 OF 29

4.4 eDP Rx Interface Eye Diagram

< Table 8. Eye Mask at Receive package pin >

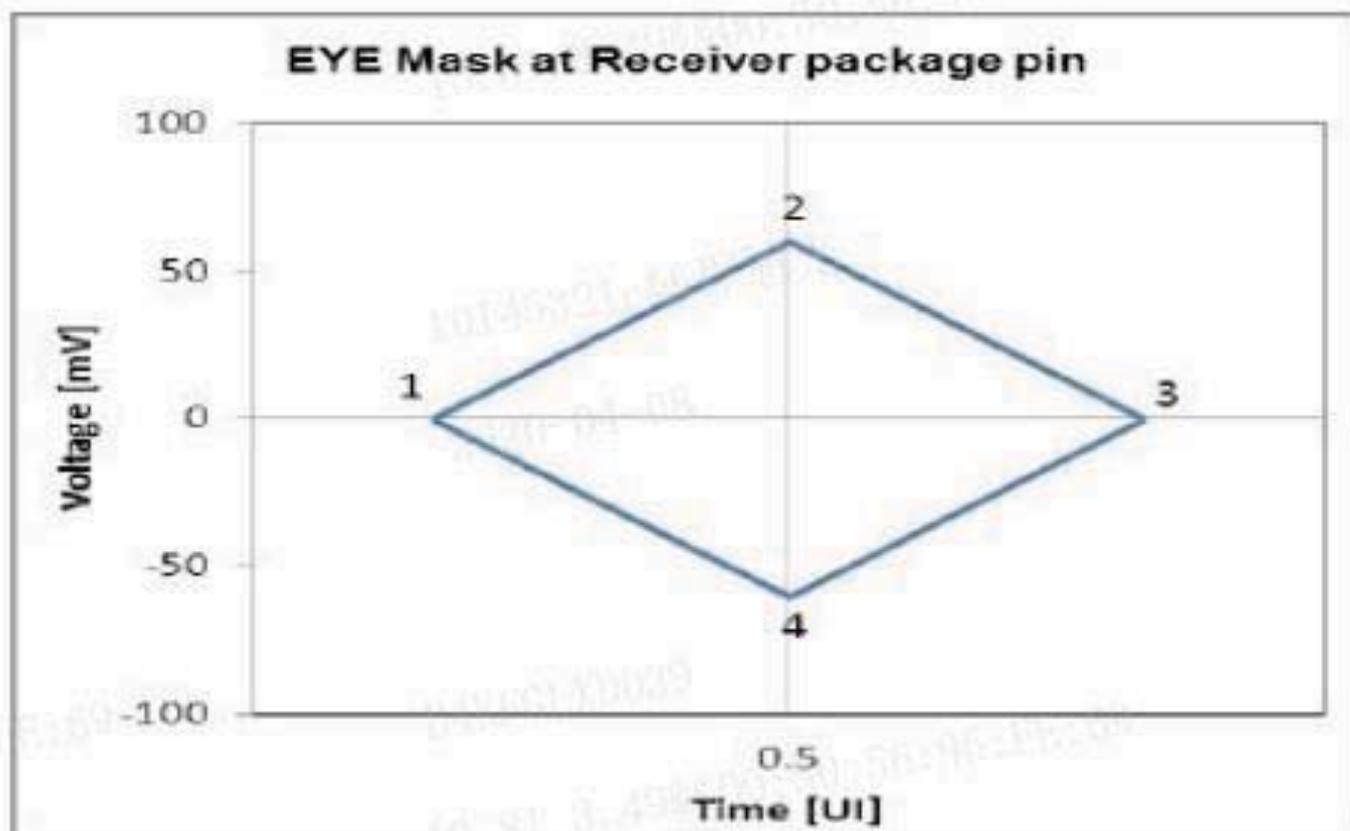

< Table 9. Timing parameter >

Point	Time(UI)	Voltage
1	0.246	0
2	0.5	0.035
3	0.775	0
4	0.5	-0.035

BOE

PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2020.04.08

SPEC. NUMBER
NO. XX-XX-XX-XXX


SPEC. TITLE
DV150X0M-N12 Product Specification

PAGE
13 OF 29

5.0 SIGNAL TIMING SPECIFICATION

5.1 Power Sequence

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below

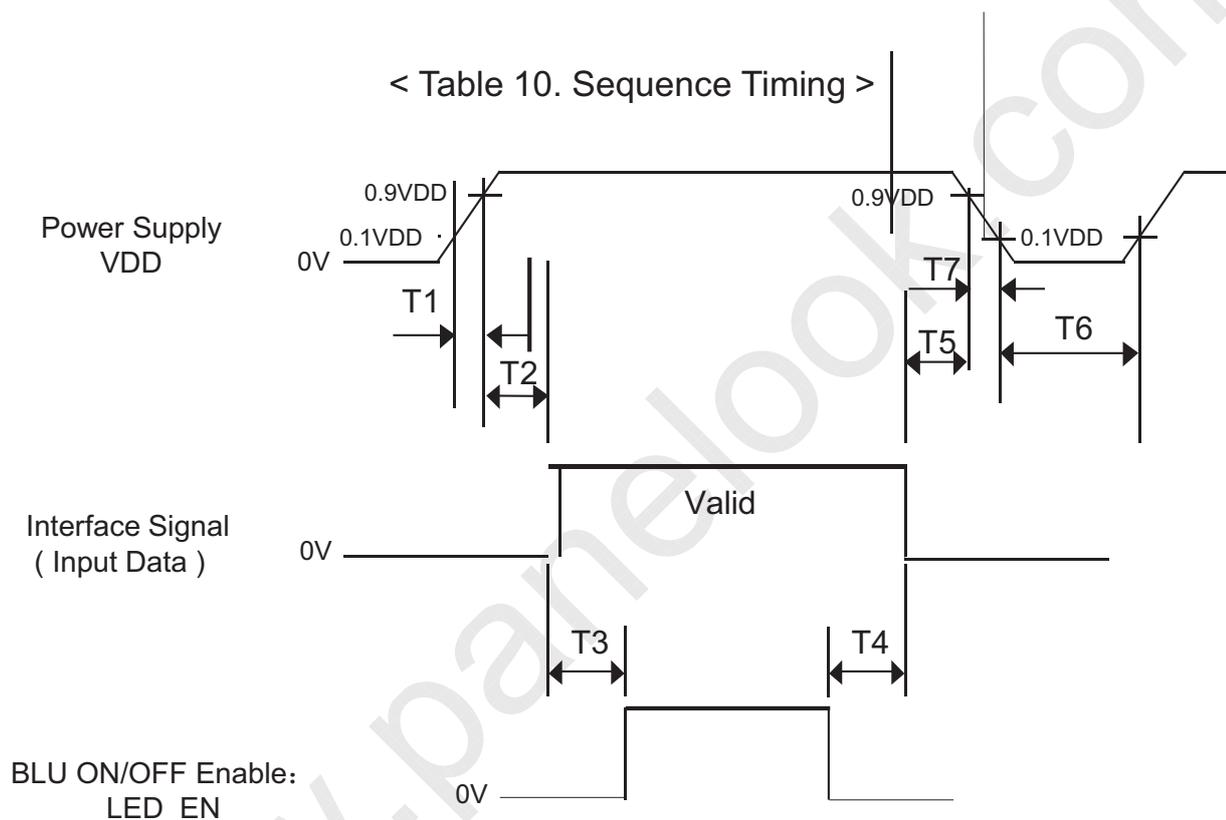

< Table 11. Sequence Table >

Parameter	Values			Units
	Min	Typ	Max	
T1	0.5	-	10	ms
T2	0	-	50	ms
T3	500	-	-	ms
T4	500	-	-	ms
T5	0	-	30	ms
T6	5	-	-	s

- Notes:
1. Back Light must be turn on after power for logic and interface signal are valid.
 2. Even though T1 is out of SPEC, it is still ok if the inrush current of VDD is below the limit.
 3. When $VDD < 0.9VDD$ (Typ.), Power off.
 4. T7 decreases smoothly, if there were rebounding voltage, it must smaller than 0.5 volts.

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2020.04.08

SPEC. NUMBER

SPEC. TITLE

PAGE

NO. XX-XX-XX-XXX

DV150X0M-N12 Product Specification

14 OF 29

6.0 OPTICAL SPECIFICATIONS

The test of optical specifications shall be measured in a dark room (ambient luminance \leq 1 lux and temperature $=25\pm 2^{\circ}\text{C}$) with the equipment of Luminance meter system (Goniometer system and PR788) and test unit shall be located at an approximate distance 180cm from the LCD surface at a viewing angle of θ and Φ equal to 0° . We refer to $\theta_{\Phi=0}$ ($=\theta_3$) as the 3 o'clock direction (the "right"), $\theta_{\Phi=90}$ ($=\theta_{12}$) as the 12 o'clock direction ("upward"), $\theta_{\Phi=180}$ ($=\theta_9$) as the 9 o'clock direction ("left") and $\theta_{\Phi=270}$ ($=\theta_6$) as the 6 o'clock direction ("bottom"). While scanning θ and/or Φ , the center of the measuring spot on the Display surface shall stay fixed. The measurement shall be executed after 30 minutes warm-up period. VDD shall be 12.0V at 25°C . Optimum viewing angle direction is 6 'clock.

< Table 12. Optical Table >

[VDD = 5.0V, Frame rate = 60Hz, Ta = $25\pm 2^{\circ}\text{C}$]

Parameter		Symbol	Condition	Min	Typ	Max	Unit	Remark
Viewing Angle	Horizontal	θ_3	CR > 10	85	89		Deg.	Note 1
		θ_9		85	89		Deg.	
	Vertical	θ_{12}		85	89		Deg.	
		θ_6		85	89		Deg.	
Brightness		Lv	$\theta = 0^{\circ}$	315	350		nit	
Uniformity	9 Points	ΔY_9	ILED=55m A	75%	80%			Note 2
Contrast ratio		CR	$\theta = 0^{\circ}$	700:1	1000:1	-		Note 3
Reproduction of color	White	Wx	$\theta = 0^{\circ}$ (Center) Normal Viewing Angle	TYP. - 0.03	0.313	TYP. + 0.03		Note 4
		Wy			0.329			
	Red	Rx			0.649			
		Ry			0.338			
	Green	Gx			0.323			
		Gy			0.627			
	Blue	Bx			0.155			
		By			0.056			
Color Gamut				67	72	-	%	
Response Time	Tr+Tf			-	30	35	ms	Note 5
Gamma Scale				2.0	2.2	2.4		

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2020.04.08

SPEC. NUMBER

SPEC. TITLE

PAGE

NO. XX-XX-XX-XXX

DV150X0M-N12 Product Specification

15 OF 29

Note :

1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface.
2. The White luminance uniformity on LCD surface is then expressed as : $\Delta Y = \text{Minimum Luminance of 9 points} / \text{Maximum Luminance of 9 points}$. (see Figure 1 shown in Appendix).
3. Contrast measurements shall be made at viewing angle of $\theta = 0^\circ$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state. (See Figure 2 shown in Appendix) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

4. The color chromaticity coordinates specified in Table 9. shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel. The BLU is used by BOE.
5. Response time Tg is the average time required for display transition by switching the input signal as below table and is based on Frame rate fV =60Hz to optimize.
Each time in below table is defined as Figure 3 and shall be measured by switching the

Measured Response Time	Target																
	0	15	31	47	63	79	95	111	127	143	159	175	191	207	223	239	255
0																	
15																	
31																	
47																	
63																	
79																	
95																	
111																	
127																	
143																	
159																	
175																	
191																	
207																	
223																	
239																	
255																	

6. Definition of Transmittance (T%) :

Module is with white(L255) signal input

$$\text{Transmittance} = \frac{\text{Luminance of LCD Module}}{\text{Luminance of BLU}} \times 100 \%$$

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2020.04.08

SPEC. NUMBER
NO. XX-XX-XX-XXXSPEC. TITLE
DV150X0M-N12 Product SpecificationPAGE
16 OF 29

7.0 MECHANICAL CHARACTERISTICS

7.1 Dimensional Requirements

Figure 3(located in Appendix) shows mechanical outlines for the model DV150X0M-N12 .
Other parameters are shown in Table 13.

< Table 13. Dimensional Parameters >

Parameter	Specification	Unit
<u>Dimensional outline</u>	326.5(H) × 253.5(V) × 9.7(D)	<u>mm</u>
Weight	930	gram
Active area	304.128(H) × 228.096(V)	mm
Pixel pitch	0.099(H) × 0.297(V)	mm
Number of pixels	1024(H) × 768(V) (1 pixel = R + G + B dots)	pixels

7.2 Mounting

See FIGURE 5. (shown in Appendix)

7.3 Anti-Glare and Polarizer Hardness.

The surface of the LCD has an anti-glare coating to minimize reflection and a coating to reduce scratching.

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2020.04.08

SPEC. NUMBER

SPEC. TITLE

PAGE

NO. XX-XX-XX-XXX

DV150X0M-N12 Product Specification

17 OF 29

8.0 RELIABILITY TEST

The Reliability test items and its conditions are shown in below.

< Table 14. Reliability Test Parameters >

No	Test Items	Conditions
1	High temperature storage test	Ta = 70 °C, 8 hrs
2	Low temperature storage test	Ta = -20 °C, 4 hrs
3	High temperature & high humidity storage test	Ta = 40 °C, 95%RH, 2hrs
4	High temperature operation test	Ta = 70 °C, 72 hrs
5	Low temperature operation test	Ta = -20°C, 24hrs
6	High temperature & high humidity operation test	Ta = 40 °C, 95%RH, 12hrs
7	Thermal shock	Ta = -20 °C ↔ 70 °C (per 6 hr), 4 cycle

This test condition is based on Client-Server Model.

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2020.04.08
SPEC. NUMBER NO. XX-XX-XX-XXX	SPEC. TITLE DV150X0M-N12 Product Specification		PAGE 18 OF 29

9.0 PRODCUT SERIAL NUMBER



- ① FG-CODE
- ② Module ID, 最后一位为Revision Code (扫描不显示), 前17位编码规则如下
- ③ PPID (客户端ID)
- ④ D/PN码, 规格待确定
- ⑤ 生产年份+生产周别 (中间无空格)

MDL ID Naming Rule:

Digit	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
Code	S	L	S	A	1	0	8	5	9	4	2	0	0	0	1	D	B
Description	Product Code/GBN → FG-CODE 一一对应		Grade	line	Year	Month	Model Extension Code (Last 4 Digits of FG-CODE)				Serial No. Hex-Decimal 000000-FFFFFF						

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2020.04.08

SPEC. NUMBER

SPEC. TITLE

PAGE

NO. XX-XX-XX-XXX

DV150X0M-N12 Product Specification

19 OF 29

10.0 PACKING INFORMATION




BOE provides the standard shipping container for customers, unless customer specifies their packing information. The standard packing method and Barcode information are shown in below.

10.1 Packing Order

Put 1 EPE bottom into the inner box.

Put each module into a PE bag.

Insert 14 Pcs MDL into each box

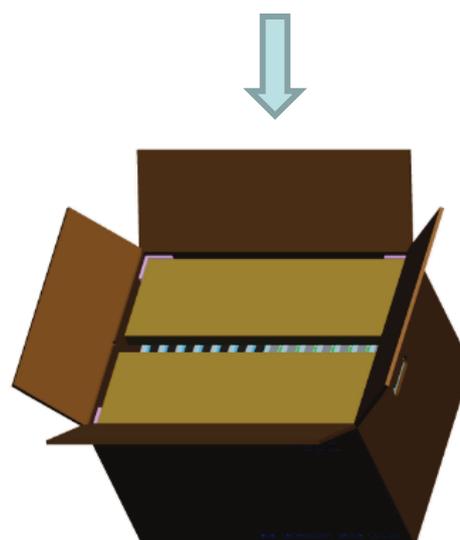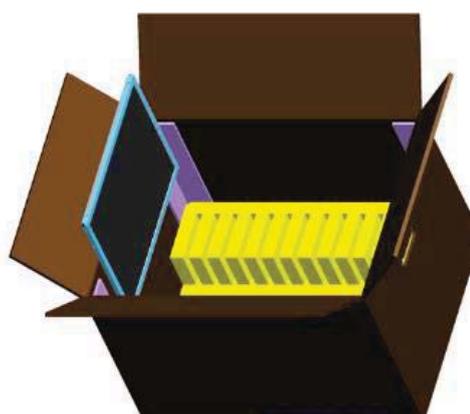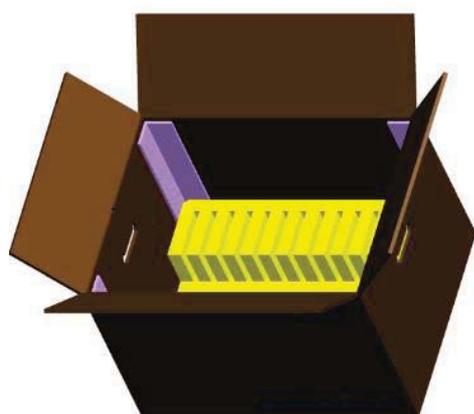

- Put the boxes on the Pallet
- 12boxes/Pallet:6boxes per layer, total 2 layers
- Place paper corners and wrap film around the boxes
- Pack with 4 packing belts

Put 1 EPE cover in and seal the box.

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2020.04.08
SPEC. NUMBER NO. XX-XX-XX-XXX	SPEC. TITLE DV150X0M-N12 Product Specification		PAGE 20 OF 29

10.2 Packing Note

- Box Dimension : **510mm(L)×399mm(W)×324mm(H)**
- Package Quantity in one Box : 14pcs

10.3 Box Label

- Label Size : 100 mm (L) × 50 mm (W)
- Contents
 - Model : DV150X0M-N12
 - Q`ty : Module 14 Q`ty in one box
 - Serial No. : Box Serial No.
 - Date : Packing Date

BOE FUZHOU BOE OPTOELECTRONICS TECHNOLOGY Co.,LTD

MODEL: XXXXXXXX-XXX ① Q'TY: XXX ②

SERIAL NO: XXXXXXXXXXXXX ③ DATE: XXXX.XX.XX ④

Box ID 条形码

XXXXXXXXXXXXX ⑤ XXXX ⑥



打印内容, 说明如下:

- ① FG-CODE
- ② 产品数量
- ③ Box ID, 编码规则如下
- ④ Box Packing 日期
- ⑤ 产品物料号(客户端)
- ⑥ FG-CODE 后四位

Digit Code	1	2	3	4	5	6	7	8	9	10	11	12	13
Code	X	X	X	X	1	6	3	D	0	0	1	A	1
Descripti on	Products G BN		Gra de	Line	Year		Mon th	Revisi on Code	Serial No.				

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2020.04.08
SPEC. NUMBER NO. XX-XX-XX-XXX	SPEC. TITLE DV150X0M-N12 Product Specification		PAGE 21 OF 29

11.0 PRECAUTIONS

Please pay attention to the followings when you use this TFT LCD Module.

11.1 Mounting Precautions

- Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- You must mount a module using specified mounting holes (Details refer to the drawings)
- You should consider the mounting structure so that uneven force (ex. Twisted stress, Concentrated stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- Do not apply mechanical stress or static pressure on module; Abnormal display cause by pressing some parts of module during assembly process, do not belong to product failure, the press should be agreed by two sides.
- Determine the optimum mounting angle, refer to the viewing angle range in the specification for each model.
- Do not apply mechanical stress or static pressure on module, and avoid impact, vibration and falling.
- Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- Protection film for polarizer on the module should be slowly peeled off before display.
- Be careful to prevent water & chemicals contact the module surface.
- You should adopt radiation structure to satisfy the temperature specification.
- Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth. (Some cosmetics are detrimental to the polarizer.)
- When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzine. Normal-hexane & alcohol is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene, because they cause chemical damage to the polarizer.
- Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading..

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2020.04.08
SPEC. NUMBER NO. XX-XX-XX-XXX	SPEC. TITLE DV150X0M-N12 Product Specification	PAGE 22 OF 29	

- This module has its circuitry PCB's on the rear side and Driver IC, should be handled carefully in order not to be stressed.
- Avoid impose stress on PCB and Driver IC during assembly process ,Do not drawing, bending, COF package & wire
- Do not disassemble the module.

11.2 Operating Precautions

- Do not connector or disconnect the cable to/from the Module at the "Power On" Condition.
- When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the module would be damaged.
- Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.
- Do not allow to adjust the adjustable resistance or switch
- The electrochemical reaction caused by DC voltage will lead to LCD module degradation, so DC drive should be avoided.
- The LCD modules use C-MOS drivers, so customers are recommended that any unused input terminal would be connected to Vdd or Vss, do not input any signals before power is turn on, and ground you body, work/assembly area, assembly equipment to protect against static electricity.
- Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on) Otherwise the Module may be damaged.
- Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimized the interference.
- Design the length of cable to connect between the connector for back-light and the converter as shorter as possible and the shorter cable shall be connected directly , The long cable between back-light and Converter may cause the Luminance of LED to lower and need a higher startup voltage
- The cables should be as short as possible between System Board and PCB interface.
- Connectors are precision devices to transmit electrical signals, and operators should plug in parallel
- Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.

BOE**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2020.04.08

SPEC. NUMBER

SPEC. TITLE

PAGE

NO. XX-XX-XX-XXX

DV150X0M-N12 Product Specification

23 OF 29

11.3 Electrostatic Discharge Precautions

- Avoid the use work clothing made of synthetic fibers. We recommend cotton clothing or other conductivity-treated fibers.
- Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc.
- Do not close to static electricity to avoid product damage.
- Do not touch interface pin directly.

11.4 Precautions for Strong Light Exposure

- Do not leave the module operation or storage in Strong light . Strong light exposure causes degradation of polarizer and color filter.

11.5 Precautions for Storage

A. Atmosphere Requirement

ITEM	UNIT	MIN	MAX
Storage Temperature	(°C)	5	40
Storage Humidity	(%rH)	40	75
Storage Life	6 months		
Storage Condition	<ul style="list-style-type: none"> • The storage room should be equipped with a dark and good ventilation facility. • Prevent products from being exposed to the direct sunlight, moisture and water. • The product need to keep away from organic solvent and corrosive gas. • Be careful for condensation at sudden temperature change. • Storage condition is guaranteed under packing conditions. 		

B. Package Requirement

- The product should be placed in a sealed polythene bag.
- Product Should be placed on the pallet, Which is away from the floor, Be cautions not to pile the product up.
- The polarizer surface should not come in contact with any other object. It is recommended that they be stored in the container in which they were shipped.
- As the original protective film, do not use the adhesive protective film to avoid change of Pol color and characteristic.

R2013-9024-O(3/3)

A4(210 X 297)

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2020.04.08
SPEC. NUMBER NO. XX-XX-XX-XXX	SPEC. TITLE DV150X0M-N12 Product Specification		PAGE 24 OF 29

11.6 Precautions for protection film

- Remove the protective film slowly, keeping the removing direction approximate 30-degree not vertical from panel surface, If possible, under ESD control device like ion blower, and the humidity of working room should be kept over 50%RH to reduce the risk of static charge.
- People who peeled off the protection film should wear anti-static strap and grounded well.

11.7 Appropriate Condition for Commercial Display

-Generally large-sized LCD modules are designed for consumer applications . Accordingly, long-term display like in Commercial Display application, can cause uneven display including image sticking. To optimize module's lifetime and function, several operating usages are required.

1. Normal operating condition

- Temperature: $20 \pm 15^{\circ}\text{C}$
- Operating Ambient Humidity : $55 \pm 20\%$
- Display pattern: dynamic pattern (Real display)
- Well-ventilated place is recommended to set up Commercial Display system

2. Special operating condition

a. Ambient condition

- Well-ventilated place is recommended to set up Commercial Display system.

b. Power and screen save

- Periodical power-off or screen save is needed after long-term display.

c. As the low temperature, the response time is greatly delayed. As the high temperatures (higher than the operating temperature) the LCD module may turn black screen. The above phenomenon cannot explain the failure of the display. When the temperature returns to the normal operating temperature, the LCD module will return to normal display.

d. When expose to drastic fluctuation of temperature (hot to cold or cold to hot) ,the LCD module may be affected; Specifically, drastic temperature fluctuation from cold to hot ,produces

dew on the LCD module 's surface which may affect the operation of the polarizer and LCD module

e. Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on) Otherwise the Module may be damaged.

BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2020.04.08
SPEC. NUMBER NO. XX-XX-XX-XXX	SPEC. TITLE DV150X0M-N12 Product Specification		PAGE 25 OF 29

f. Product reliability and functions are only guaranteed when the product is used under right operation usages. If product will be used in extreme conditions such as high temperature, high humidity, high altitude, special display images, running time, long time operation, outdoor operation, etc. It is strongly recommended to contact BOE for filed application engineering advice. Otherwise, its reliability and function may not be guaranteed. Extreme conditions are commonly found at airports, transit stations, banks, stock market and controlling systems.

3. Operating usages to protect against image sticking due to long-term static display.

a. Suitable operating time: under 20 hours a day.

b. Static information display recommended to use with moving image.

- Cycling display between 5 minutes' information(static) display and 10 seconds' moving image.

c. Background and character (image) color change

- Use different colors for background and character, respectively.

- Change colors themselves periodically.

d. Avoid combination of background and character with large different luminance.

1) Abnormal condition just means conditions except normal condition.

2) Black image or moving image is strongly recommended as a screen save

4. Lifetime in this spec. is guaranteed only when Commercial Display is used according to operating usages.

11.8 Other Precautions

A. LC Leak

- If the liquid crystal material leaks from the panel, it is recommended to wash the LC with acetone or ethanol and then burn it.
- If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, skin or clothes, it has to be washed away thoroughly with soap.
- If LC in mouth, mouth need to be washed, drink plenty of water to induce vomiting and follow medical advice.
- If LC touch eyes, eyes need to be washed with running water at least 15 minutes.

B. Rework

- When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.

BOE**PRODUCT GROUP**

REV

ISSUE DATE


TFT- LCD PRODUCT

0

2020.04.08

SPEC. NUMBER
NO. XX-XX-XX-XXXSPEC. TITLE
DV150X0M-N12 Product SpecificationPAGE
26 OF 29**12.0 APPENDIX**

< Figure 1.Uniformity Measurement Locations (9 points)>

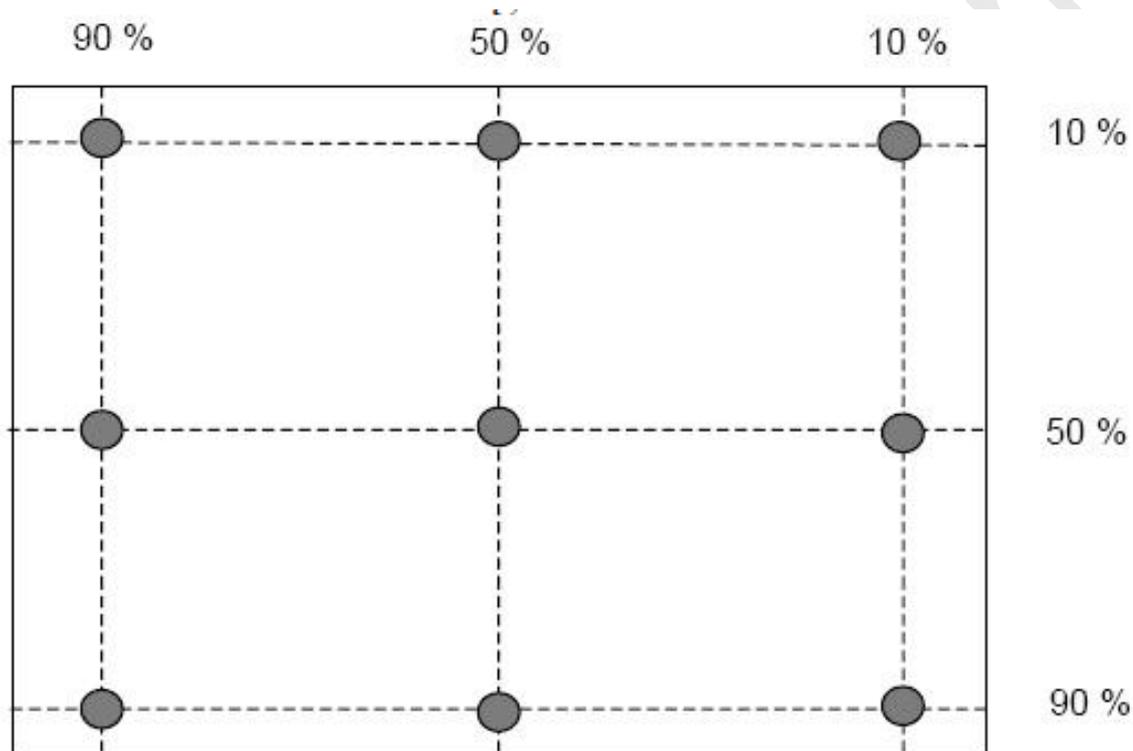


The White luminance uniformity on LCD surface is then expressed as : $\Delta Y9 = \text{Minimum Luminance of five points} / \text{Maximum Luminance of 9 points}$


BOE	PRODUCT GROUP	REV	ISSUE DATE
	TFT- LCD PRODUCT	0	2020.04.08
SPEC. NUMBER NO. XX-XX-XX-XXX	SPEC. TITLE DV150X0M-N12 Product Specification	PAGE 27 OF 29	

12.0 APPENDIX

< Figure 2. Measurement Set Up >

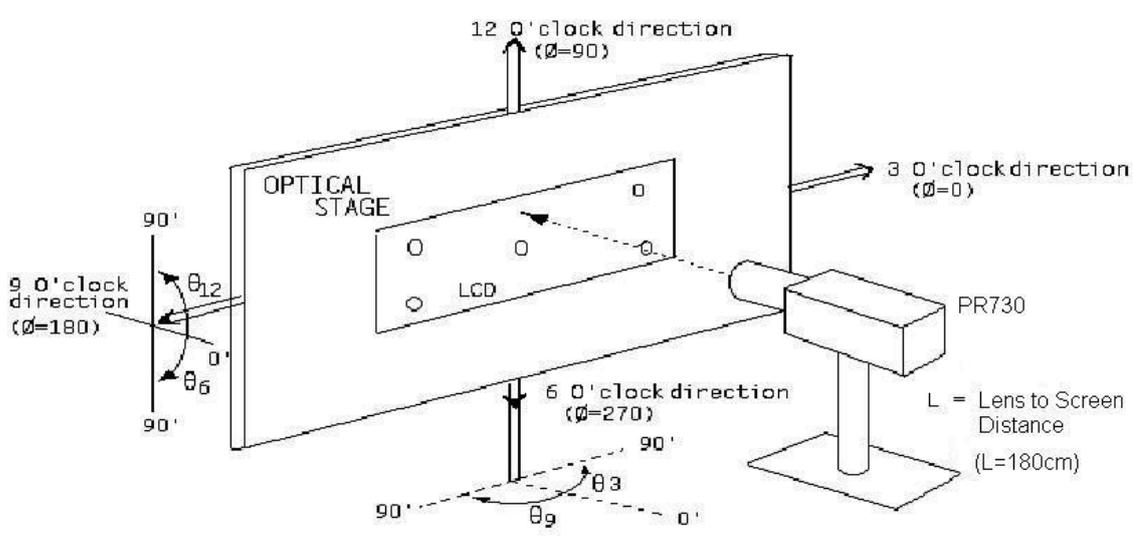

< Figure 3. Response Time Testing >

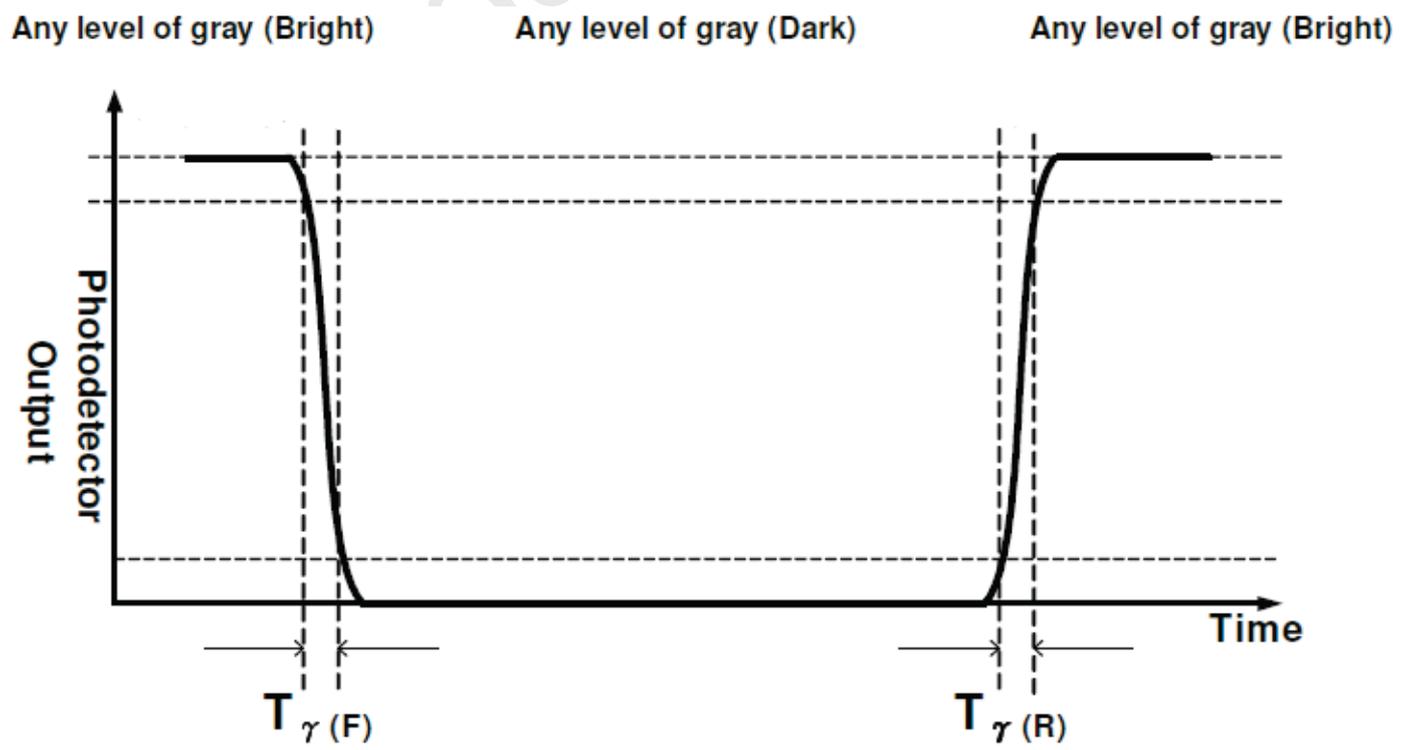

BOE

PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

0

2020.04.08

SPEC. NUMBER

SPEC. TITLE

PAGE

NO. XX-XX-XX-XXX

DV150X0M-N12 Product Specification

29 OF 29

< Figure 4.TFT-LCD Module Outline Dimensions (Rear View) >

