

**PROPRIETARY NOTE**

THIS SPECIFICATION IS THE PROPERTY OF BOE HF AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOE BJ AND MUST BE RETURNED TO BOE HF UPON ITS REQUEST

SPEC. NUMBER**PRODUCT GROUP**

TFT-LCD

REV.

P0

DATE

2019.01.10

PAGE

1 /23

****EV121X0M-N10**- Product Specification Rev.P0**

Buyer	
Supplier	BEIJING BOE Optoelectronics Technology CO., LTD
FG-Code	EV121X0M-N10-1850 (1.0T MDL)

ITEM	SIGNATURE	DATE
Approved	_____	_____
Reviewed	_____	_____
Prepared	_____	_____

BEIJING BOE OPTOELECTRONICS TECHNOLOGY



BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2019.01.10
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 2 /23

REVISION HISTORY

REV.	ECN NO.	PAGE	DESCRIPTION OF CHANGES	DATE	PREPARED
P0			Initial Release	**	**



	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2019.01.10
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 3 /23

Contents


NO.	ITEMS	PAGE
1.0	General Description	4
2.0	Absolute Maximum Ratings	6
3.0	Electrical Specifications	7
4.0	Optical Specifications	17
5.0	Reliability Test	20
6.0	FPC/IC Pin Assignment & Mechanical Characteristics	27
7.0	Packing Information	28
8.0	Label	29
9.0	Mechanical Outline Dimension	32
10.0	Handling & Cautions	34

BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2019.01.10
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 4 /23

1.0 GENERAL DESCRIPTION

1.1 Introduction

EV121X0M-N10 is a color active matrix TFT LCD using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 12.1 inch diagonally measured active area with XGA resolutions (1024 horizontal by 768 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripe and this module can display 16.7M colors.

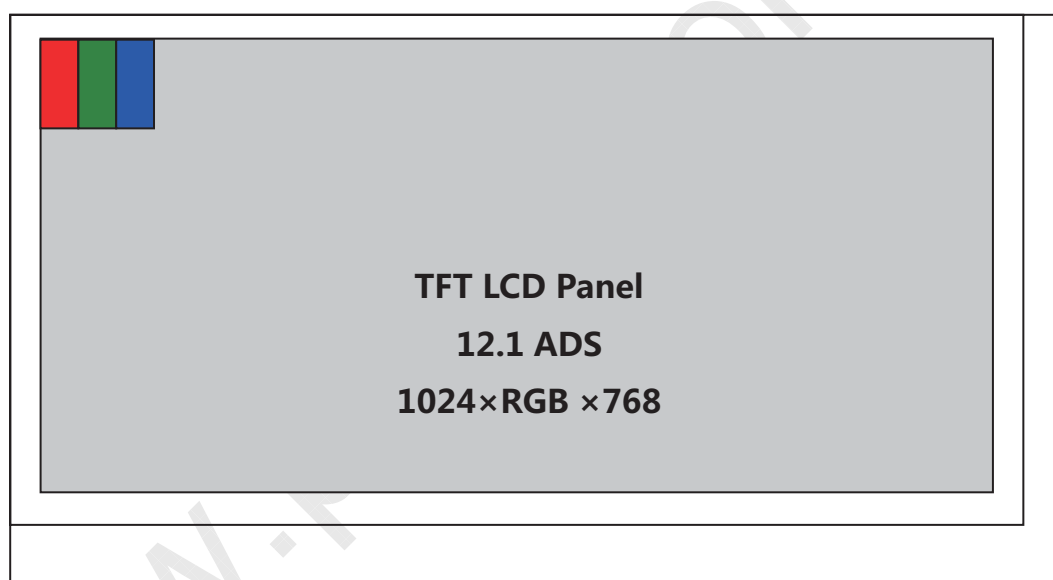

1.2 Features

- Cell Thickness : 1.0t
- Thin and light weight
- RoHS Compliant

BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2019.01.10
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 5 /23

1.3 Application

- Smart Large size vehicle mounted product

1.4 General Specification (H: horizontal length, V: vertical length)

The followings are general specifications at the EV121X0M-N10-1850

<Table 1. General Specifications>

Parameter	ITEMS	Unit	Remark
Active area	245.76(H) ×184.32(V)	mm	
Dimensional Outline	260.5(W)×204(V)×8.7(D)	mm	
Border(L/R/U/D)	3.25/3.35/3.7/3.5	mm	
Number of pixels	1024(H) x768 (V)	pixels	
Pixel pitch	80(H) x240 (V)	mm	
Pixel arrangement	1P2D		
Luminance	Typ 500 nit ; Min 400nit	nit	
Transmittance	Typ:4.5% ; Min:3.8%		without APF
Color Gamut	Type:72% ; Min:67%		
Display colors	16.7M		
Display mode	Normally Black		
Contrast Ratio	Typ:1200 ; Min:900		25°C
Response Time	Typ:25ms ; Max:35ms	ms	25°C
Optima Viewing Direction (Human Eye)	Typ:88/88/88/88	Deg.	CR>10
Driver IC	-		Note1
Weight		gram	

Note:

1. This product's compatible IC is HX8263-A、HX8683-D, Please contact IC manufacturer and verify it when you choose any one of them. The information we suppose about IC just for reference

R2010-6053-O(3/3)

BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2019.01.10
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 6 /23

2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

<Table 2. Absolute Maximum Ratings >

Parameter	Symbol	Min.	Max.	Unit	Remarks
LC operating Voltage [Note1]	V _{OP}		6.0	V	Ta=25+/-5° C
Operating Temperature (Humidity)	T _{OP}	-20	+70	°C	[Note2]
	RH(60°)		90	%	
Storage Temperature (Humidity)	T _{ST}	-30	+80	°C	
	RH(60°)		90	%	

Note:

1. Liquid Crystal driving voltage

Due to the characteristics of LC Material, this voltage varies with environmental temperature.

2. Temperature and relative humidity range are shown in the figure below.

Wet bulb temperature should be 39 °C max. and no condensation of water.

BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2018.07.31
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 7/36

3.0 ELECTRICAL SPECIFICATIONS

3.1 Electrical Specifications

<Table 3. Electrical specifications >

Parameter	Symbol	Value	Range	Unit	Remark
TFT Gate ON Voltag	VGH	21	-	V	Note1
TFT Gate OFF Voltage	VGL	-8	-	V	Note2
TFT Common Electrode Voltage	Vcom	4.6	-	V	Note3
TFT Kick-Back Voltage Max	ΔV_p Max	-	-	V	
TFT Kick-Back Voltage Min	ΔV_p Min	-	-	V	
LCD Panel Signal Processing Board	VDD	3.3	3.0~3.6	V	
LCD Panel Signal Current	—	1	-	A	
Backlight Input Voltage	—	12	-	V	
Backlight Input Current	—	0.8	-	A	
LCD Panel Display Power	—	3.3	-	W	
Backlight Power	—	9.6	-	W	

Note:

1. VGH is TFT Gate operating voltage.
2. VGL is TFT Gate operating voltage. The low voltage level of VGL signal must be fluctuates with same phase as Vcom.
3. Vcom must be adjusted to optimize display quality, as Crosstalk and Contrast Ratio etc..


We just kindly recommend the setting-voltages the reference value.

In order to get the optimized display quality, the setting-voltage should be changed according to customer's developing condition. (The display quality could be changed by customer's setting -voltage.)

BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2018.07.31
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 10/36

3.2 Power Sequence

[Ta =25±2 °C]

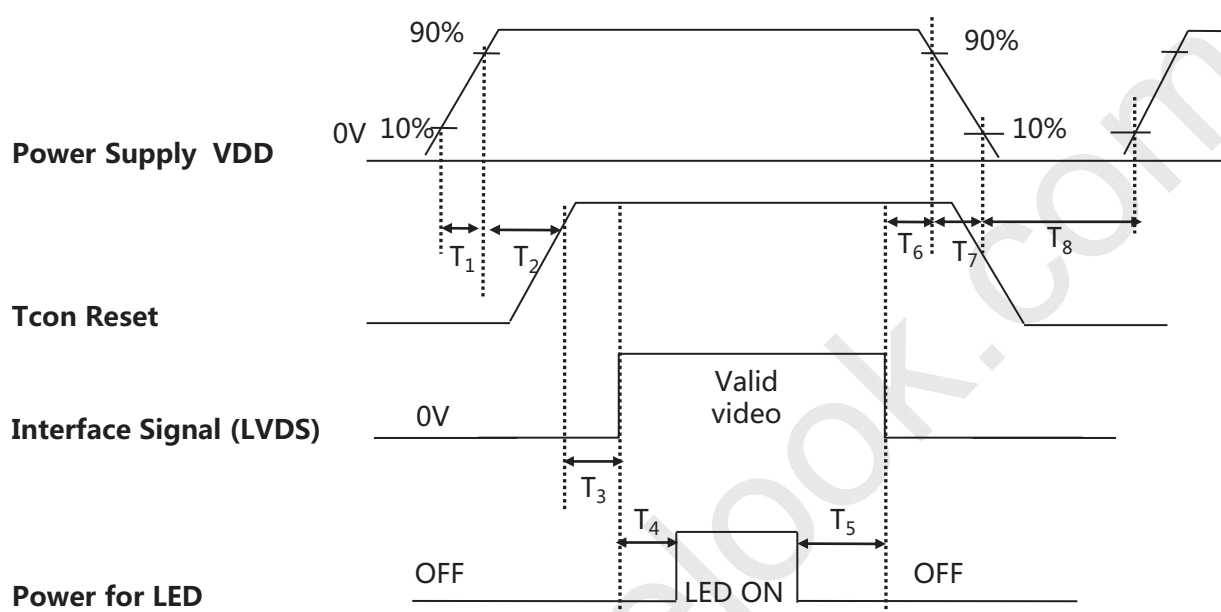


< Table 4. Sequence Table >

Parameter	Value			Units
	Min.	Typ.	Max.	
T1	0.1	-	8	(ms)
T2	-	8	-	(ms)
T3	0	-	-	(ms)
T4	300	-	-	(ms)
T5	300	-	-	(ms)
T6	0	-	50	(ms)
T7	0	-	10	(ms)
T8	500	-	-	(ms)


BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2018.07.31
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 11/36

3.3 LVDS Interface Characteristic

3.3.1 Data Format

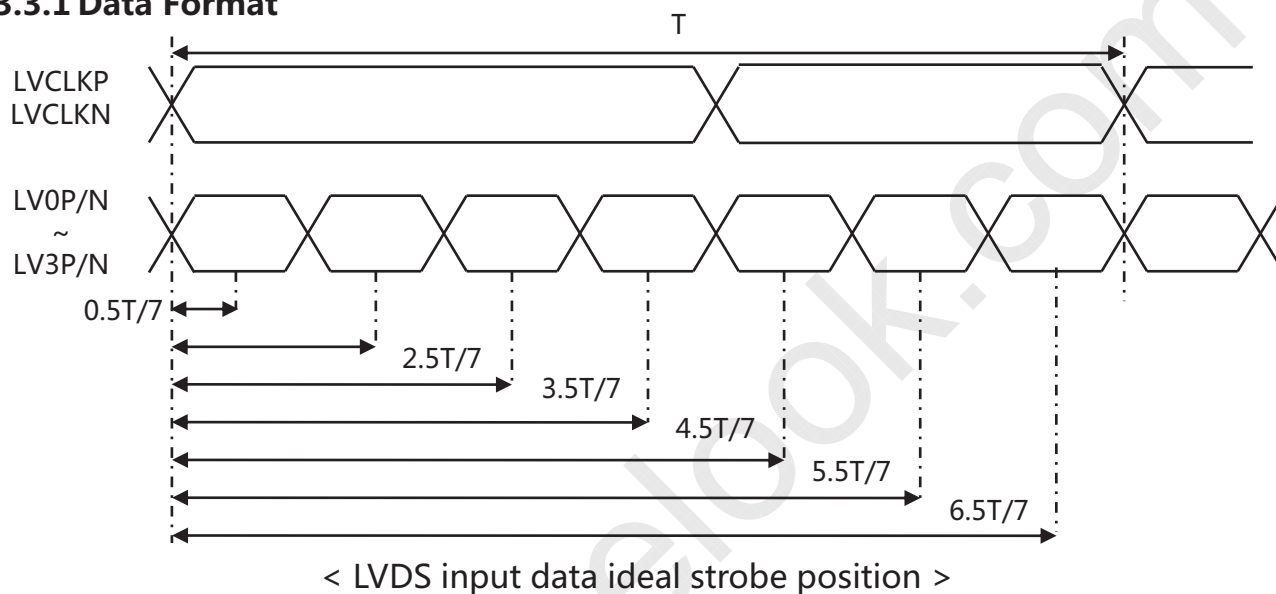

3.3.2 LVDS input data mapping

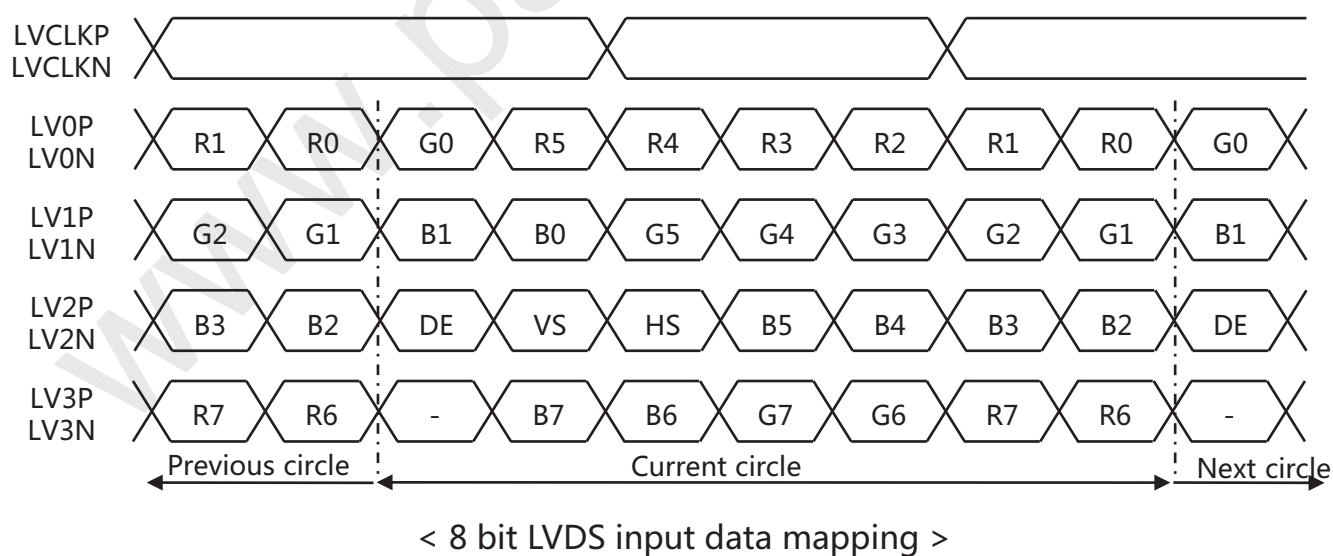


BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2018.07.31
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 12/36

3.3.3 DC Specification



< Table 5. DC Specification >

Parameter	Symbol	Min	Typ	Max	Unit	Condition
Supply current	I_{DD}	-	100	-	mA	
LVDS DC specifications						
Differential input high threshold	V_{TH}	-	-	+100	mV	$V_{IC}=1.2V$
Differential input low threshold	V_{TL}	-100	-	-	mV	
LVDS common mode voltage	V_{IC}	0.7	-	1.6	V	
LVDS swing voltage	V_{ID}	± 100	-	± 600	mV	
Mini-LVDS DC specifications						
Output differential voltage range	V_{OD}	± 170	± 200	± 230	mV	PI=14K Ω RL=100 Ω ($T_A=25^{\circ}C$)
Output differential voltage deviation		TBD	-	TBD	mV	
Output offset voltage range	V_{OS}	1.0	1.2	1.4	V	
Output offset voltage deviation		TBD	-	TBD	V	

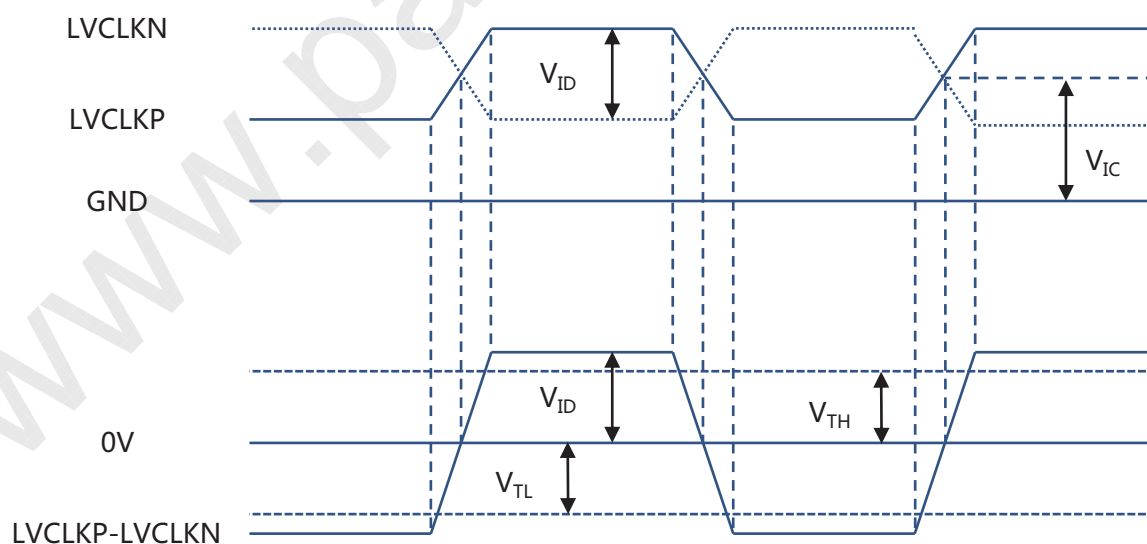

< LVDS V_{ID} and V_{IC} definition >


BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2018.07.31
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 13/36

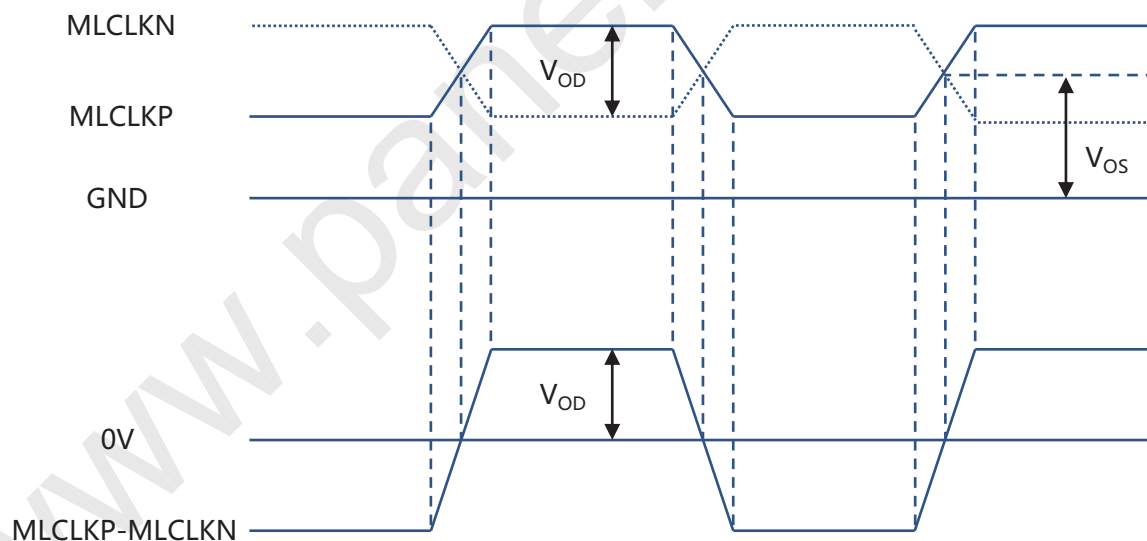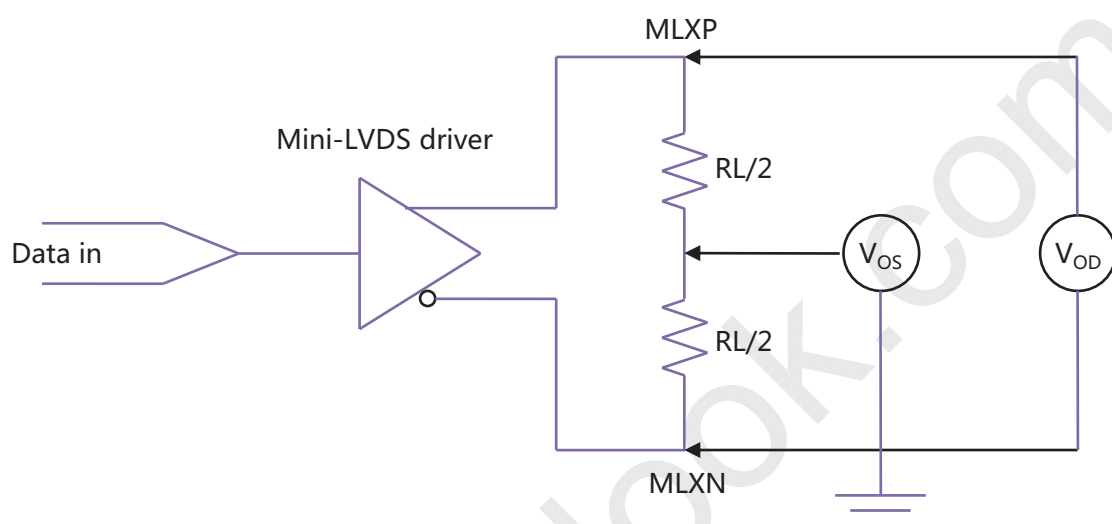

< Mini-LVDS V_{OD} and V_{OS} definition >

BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2018.07.31
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 14/36


3.3.4 AC Specification

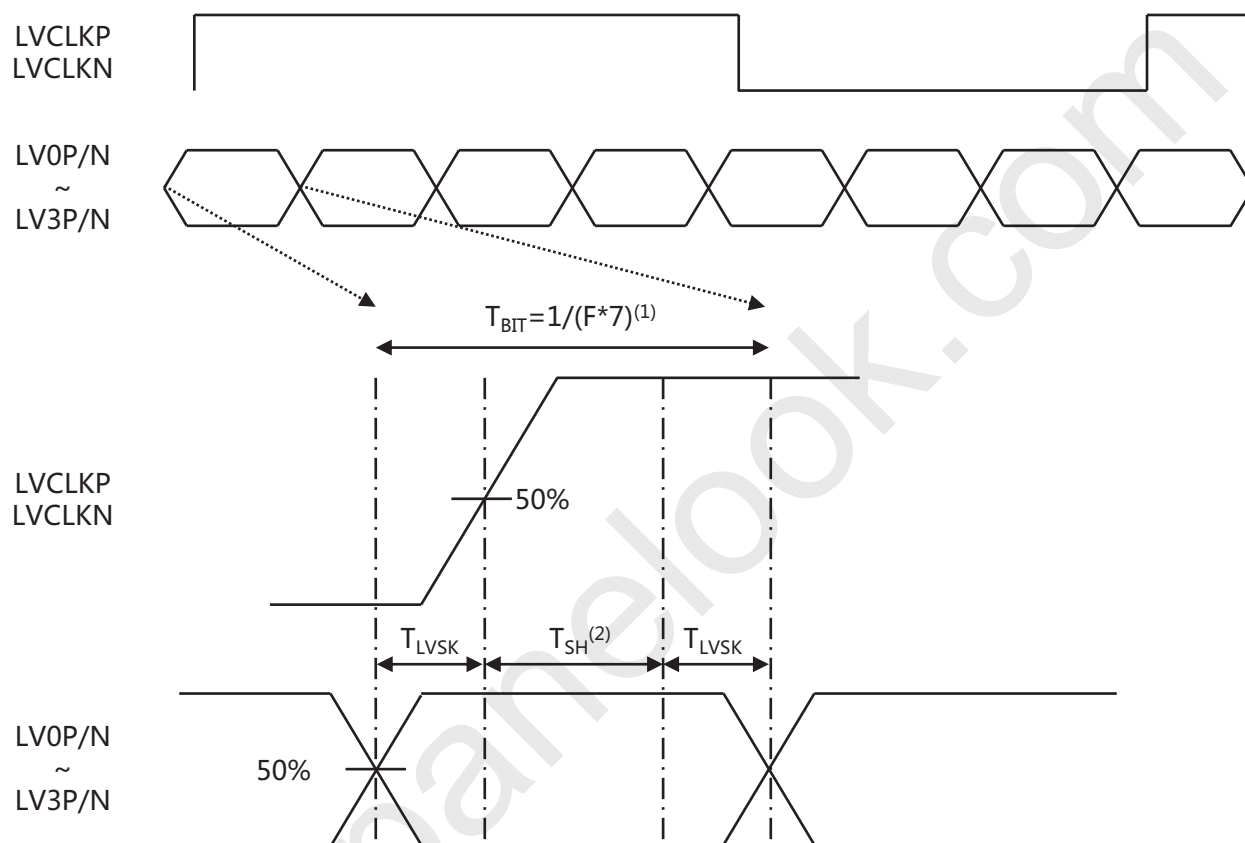

Note:

- (1) T_{BIT} : Data period
- (2) Internal CLK sampling data window

< LVDS channel to channel skew >

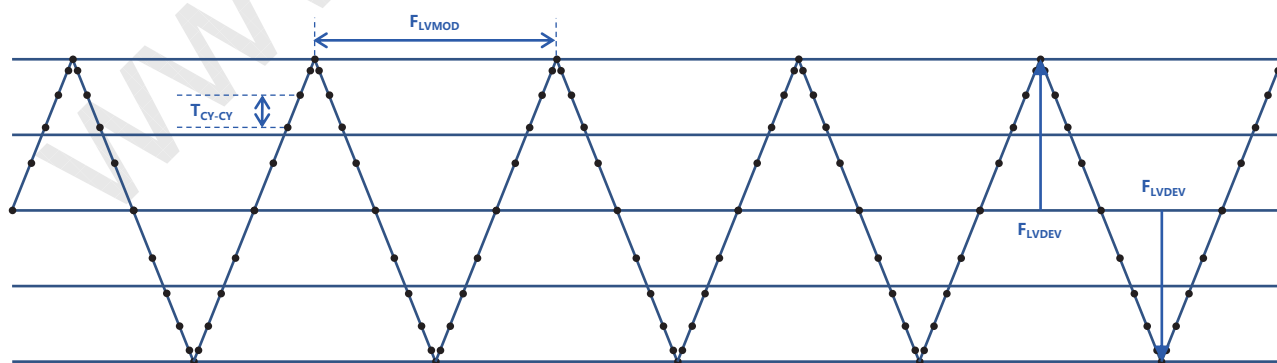

< LVDS input SSC >

BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2018.07.31
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 15/36

< Table 6. AC Specification >


Description	Symbol	Condition	Min	Typ	Max	Unit
LVDS Input frequency	F	-	25	-	100	MHz
LVDS channel to channel skew	T_{LVSK}	F=65MHz $V_{IC}=1.2V$ $V_{ID}=\pm 200mV$	-600	-	+600	ps
Modulating frequency of input clock during SSC	F_{LVMOD}	F=85MHz $V_{IC}=1.2V$ $V_{ID}=\pm 200mV$	10	-	300	KHz
Maximum deviation of input clock frequency during SSC	F_{LVDEV}		-3	-	+3	%
Cycle to cycle jitter	T_{CY-CY}		-	-	200	ps

BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2018.07.31
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 16/36

3.5 Interface timing Parameter

< Table 7. Timing Parameter >

Item			Symbol	min	typ	max	UNIT
LCD	Frame Rate		-	-	60	-	Hz
	Pixels Rate		-	57.5	64.9	74.4	MHz
Timing	Horizontal	Horizontal total time	tHP	1240	1344	1464	t _{CLK}
		Horizontal Active time	tHadr	1024			t _{CLK}
		Blank	HB	216	320	440	t _{CLK}
	Vertical	Vertical total time	tvp	778	806	848	t _H
		Vertical Active time	tVadr	768			t _H
		Blank	VB	10	38	80	t _H
Lane				-	1	-	Lane

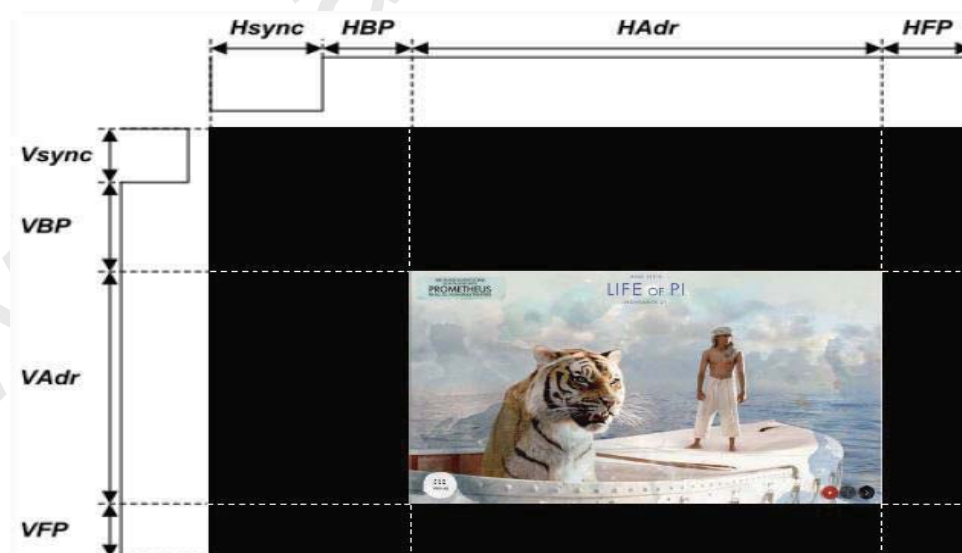

BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2019.01.10
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 15 /23

4.0 OPTICAL SPECIFICATION

4.1 Overview

The test of Optical specifications shall be measured in a dark room (ambient luminance $\leq 1\text{lux}$ and temperature = $25\pm 2^{\circ}\text{C}$) with the equipment of Luminance meter system (Goniometer system and TOPCON BM-5) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and Φ equal to 0° . The center of the measuring spot on the Display surface shall stay fixed.

The backlight should be operating for 30 minutes prior to measurement.

4.2 Optical Specifications

<Table 4. Optical Specifications >

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing Angle Range	Horizontal	Θ3	CR>10	85	88	-	Deg.	Note1
		Θ9		85	88	-	Deg.	
	Vertical	Θ12		85	88	-	Deg.	
		Θ6		85	88	-	Deg.	
Contrast ratio		CR	Θ = 0°	900	1200	-		Note2
Transmittance		Tr		3.8	4.5	-	%	Note3
Color Gamut		CG		67	72	-	%	
Reproduction of color	Red	Rx	Θ = 0°	0.619	0.649	0.679		Note4 (Based on BLU)
		Ry		0.308	0.338	0.368		
	Green	Gx		0.294	0.324	0.354		
		Gy		0.574	0.604	0.634		
	Blue	Bx		0.112	0.142	0.172		
		By		0.026	0.056	0.086		

R2010-6053-O(3/3)

BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2019.01.10
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 16 /23

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
White Chromaticity	W _x	$\Theta = 0^\circ$	0.278	0.308	0.338		
	W _y		0.297	0.327	0.357		
Response Time (Rising + Falling)	T _r + T _f	T _a = 25° C $\Theta = 0^\circ$	-	25	35	ms	Note 5



Note:

- 1.Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o' clock direction and the vertical or 6, 12 o' clock direction with respect to the optical axis which is normal to the LCD surface (see FIGURE 1).
- 2.Contrast measurements shall be made at viewing angle of $\Theta = 0$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state . (see FIGUR 1)
Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

- 3.Transmittance is the Value without APF and without CG.
- 4.The color chromaticity coordinates specified in the above table shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.
- 5.The electro-optical response time measurements shall be made as FIGURE 2 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is T_r, and 90% to 10% is T_f.

BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2019.01.10
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 17 /23

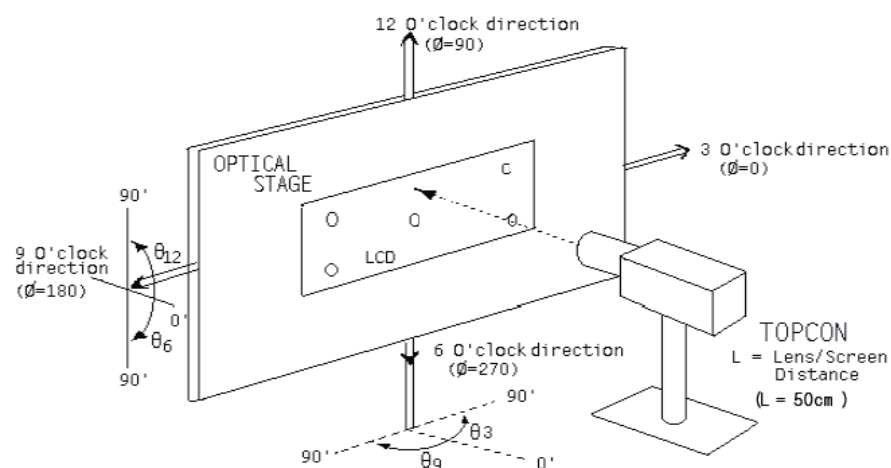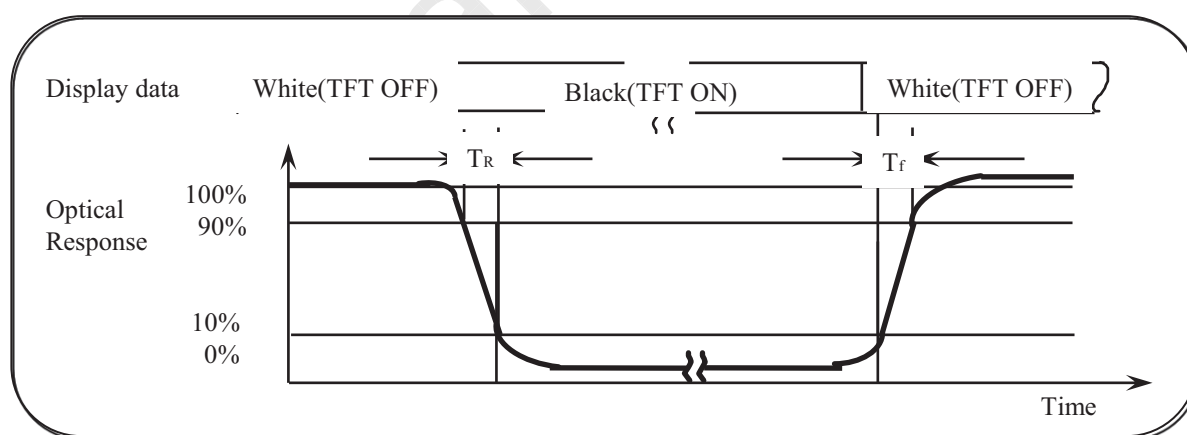Figure1 Measurement Set Up**Figure2 Response Time Testing**

BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2019.01.10
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 18 /23

5.0 Reliability Test

The Reliability test items and its conditions are shown in below.

<Table 5. Reliability Test Parameters >

No	Test Items	Conditions
1	High temperature storage test	Ta = 80 °C, 240 hrs
2	Low temperature storage test	Ta = -30 °C, 240 hrs
3	High temperature & high humidity (operation test)	Ta = 60 °C, 90%RH, 240hrs
4	Low temperature operation test	Ta = -20 °C, 240hrs
5	High temperature operation test	Ta = 70 °C, 240hrs
6	Thermal Shock Test	Ta = -40 °C ~ 80°C, 1h/Cycle, 100Cycles
7	VIB Test	10-300Hz , 1.5G , 10min/cycle , 3 cycle each X/Y/Z
8	SHOCK Test	200G , 2ms , Half sine , 1time for ±X/±Y/±Z

BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2019.01.10
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 19 /23

6.0 FPC/IC Pin Assignment & Mechanical Characteristics

6.1 Dimension Requirements

Mechanical outlines for the panel (H: horizontal length, V: Vertical length)


<Table 6 Dimensional Parameters>

Parameter	ITEMS	Unit	Remark
Dimensional Outline	254.86±0.20(W)×x195.02±0.20(V) × 1.0±0.02(D)	mm	
CF size	252.36(H) x191.52(V)	mm	
Active area	245.76(H) x 184.32 (V)	mm	
Border(L/R/U/D)	3.25/3.35/3.7/3.5	mm	
Number of pixels	1024(H) x768 (V)	pixels	
	1pixel=R+G+B dots		
Pixel pitch(Dot)	80(H) x240 (V)	um	
Pixel Arrangement	1P2D		
Pad Area	3.5(Data)/2.5(Gate)	mm	
Glass Edge to FPC	0.3	mm	
FPC Pad Width	0.8	mm	
FPC to D-IC	0.5	mm	
D-IC Width	0.93	mm	
D-IC to CF Edge	0.97	mm	

BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2019.01.10
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 20 /23

6.2 LC Align Direction & Pol absorption axis

Figure3 The TFT and CF LC Align Direction

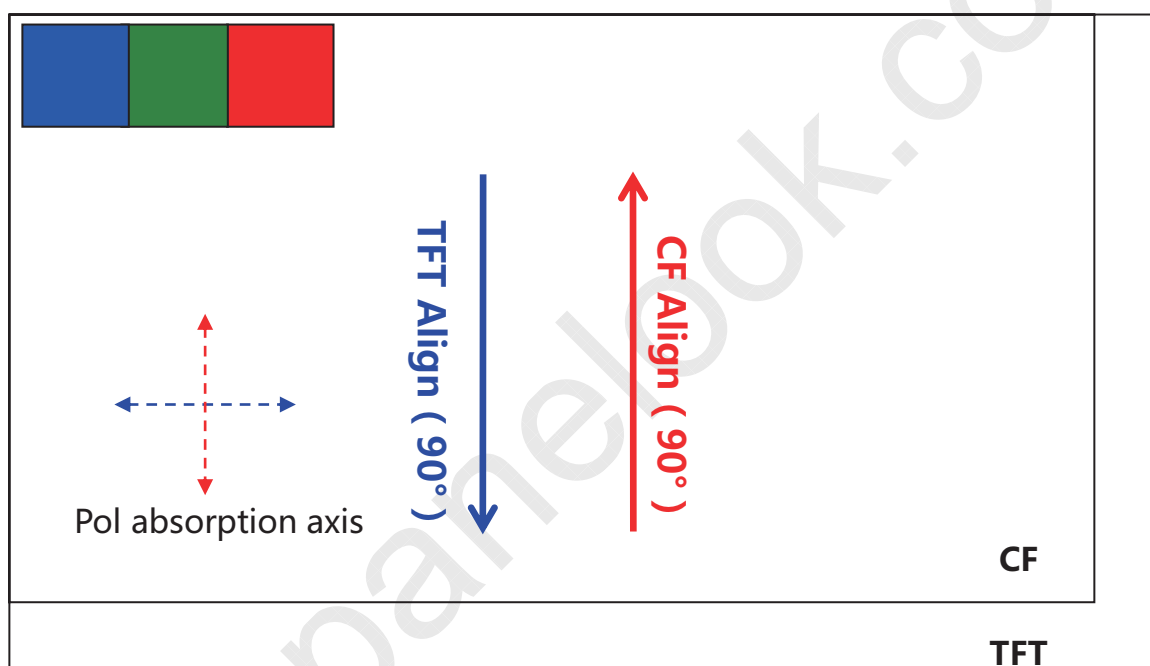


Pol absorption axis

Shown in Figure3, CF pol absorption axis is parallel with CF align direction(0°) ,
TFT pol absorption axis is vertical with TFT align direction (90°)

BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2019.01.10
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 21 /23

6.3 Outline Dimension (unit : mm)

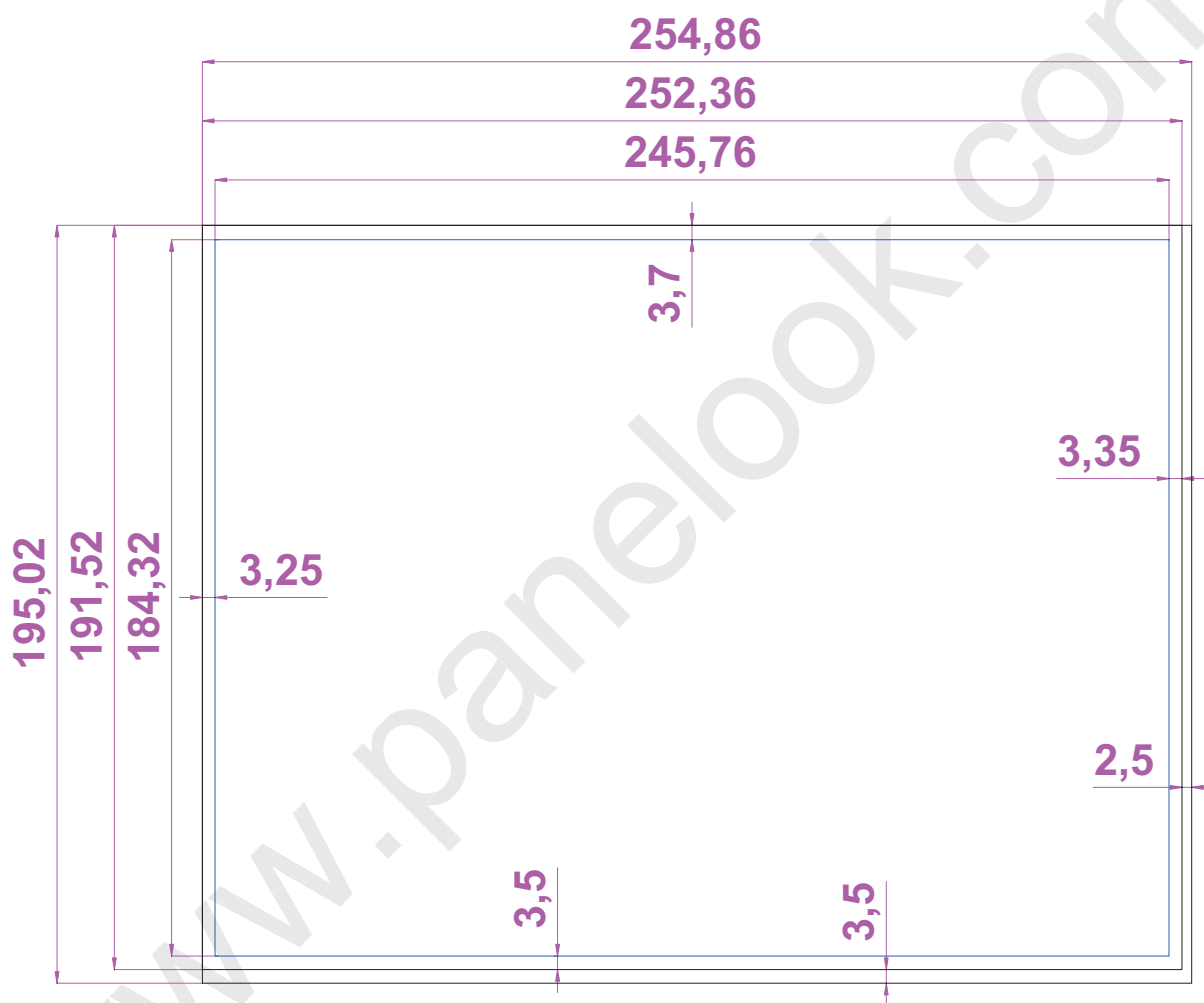

[illegible]

One step solution for LCD / PDP / OLED panel application: Datasheet, inventory and accessory! www.panelook.com



	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2018.07.31
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 25/36

6.5 Connector Pin Assignment

6.5.1 LCD panel signal

LCD Interface connector: PM.CON.13076B2001 (巨铖光电科技有限公司)

Pin	Name	Description
1	RX3+	Differential Data Input,CH3(Positive)
2	RX3-	Differential Data Input,CH3(Negative)
3	NC	
4	NC	
5	GND	Ground
6	RXC+	Differential Clock Input(Positive)
7	RXC-	Differential Clock Input(Negative)
8	GND	Ground
9	RX2+	Differential Data Input,CH2(Positive)
10	RX2-	Differential Data Input,CH2(Negative)
11	GND	Ground
12	RX1+	Differential Data Input,CH1(Positive)
13	RX1-	Differential Data Input,CH1(Negative)
14	GND	Ground
15	RX0+	Differential Data Input,CH0(Positive)
16	RX0-	Differential Data Input,CH0(Negative)
17	reLR	Horizontal Reverse Scan Control, Low or NC->Normal Mode High->Horizontal Reverse Scan
18	reUD	Vertical Reverse Scan Control, Low or NC->Normal Mode High->Vertical Reverse Scan
19	VCC	Power
20	VCC	Power



	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2018.07.31
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 26/36


6.5.2 LED Driver

LED Interface connector: 91208-01001-H01 (ACES)

Pin	Name	Description
1	VI	12V
2	VI	12V
3	VI	12V
4	VI	12V
5	GND	Ground
6	GND	Ground
7	GND	Ground
8	GND	Ground
9	EN	Enable, 3.3V
10	ADJ	Backlight Adjust, PWM Dimming(190-210Hz, 3.3V)

BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2019.01.10
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 25 /23

6.7 Cell Test Pad(unit : mm)

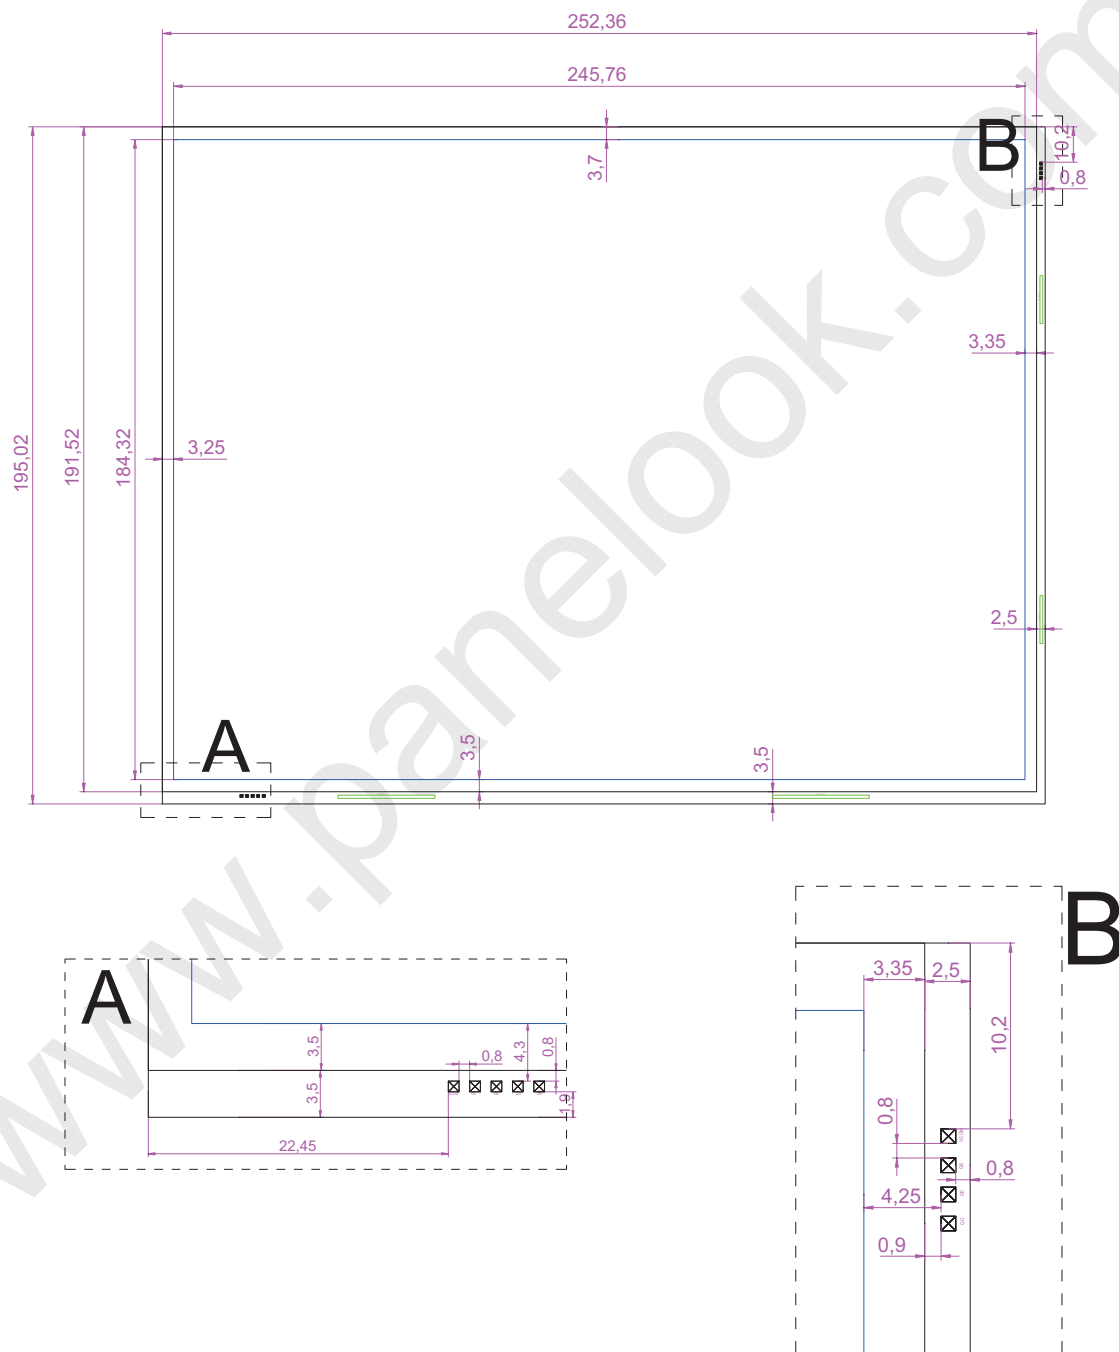

ET Test Pad :

A (左侧) VCOM DS DB DG DR B (右上侧) VCOM GS GE GO

BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2019.01.10
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 26 /23

7.0 PACKING INFORMATION(Single Panel)

将 MDL 放入Tray 中，每个MDL上放一片Spacer。


1 MDL/ Tray



Step 1

将Tray叠码3层，然后加放1个空Tray作盖（直叠），用美纹胶带平行于Tray的宽边方向捆绑两道，每道至少缠绕3圈。


3 MDL/4 Tray

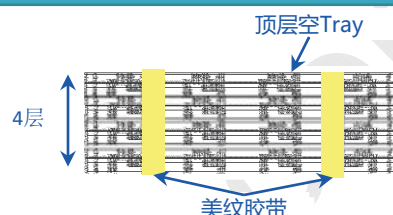

Step 2

将4层 Tray放入一个Shielding Bag中，并抽真空，将封好口的一包产品放入一个Inner Box（底部加1EA Cushion）。

3 MDL/Inner Box



Step 3

用封箱胶带对Inner Box进行封箱，并在Box的Mark框处粘贴Box标签。


3 MDL/Inner Box



Step 4

将封好的Inner Box装入Outer Box。

6 Inner Box/Outer Box



Step 5

采用“H”形封箱方式，对Box进行封箱，并在Box的Mark处粘贴相应Box标签。


18 MDL/Outer Box



Step 6

按“田”字型对Outer Box进行码拍，并粘贴Pallet标签（标签粘贴位置详见Label and Position）。


16 Outer Box/Pallet

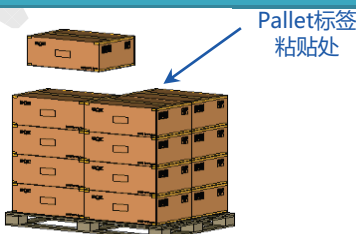

Step 7

放置护角、缠绕拉伸膜，缠绕层数不少于3层，除底面外的5个面需要全部覆盖，用打包带打包，长、宽、高边各打2道。

288 MDL/Pallet



Step 8

7.1 PACKING NOTE

- Box Dimension : 545mmL× 380mmW× 270mmH
- Package Quantity in one Box : 18pcs

R2010-6053-O(3/3)

BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2018.07.31
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 29/36

7.1 Packing Note

- Box Dimension : 545mmL× 380mmW× 270mmH
- Package Quantity in one Box : 18 pcs

8.0 LABEL

8.1 MDL Label

Figure 5 MDL Label (40mm*12mm)



- ①Refers to the front 11 digit of FG-Code,
- ①Refers to bar code of MDL,
- ③Refers to MDL ID, product information,

< Table 11. Description of ③MDL ID >

Digit	1-2	3	4	5-6	7	8-11	12-17
Code	GBN	Grade	Line	Year	Month	Revision Code	Serial Number
Description	GBN Code	Based On Actual Grade	P03-C Others -A	Last Two Bits of Year	1-9 , ABC	Last four bits of FG-Code	0-9 , A-F

BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2018.07.31
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 30/36

8.2 Box Label

BOE BEIJING BOE OPTOELECTRONICS TECHNOLOGY

MODEL: **EV121X0M-N10** ① Q'TY: **XX** ②

SERIAL NO: **XXXXXXXXXXXX** ③ DATE: **20XX.XX.XX** ④




BOE BEIJING BOE OPTOELECTRONICS TECHNOLOGY

MODEL: **EV121X0M-N10** ① Q'TY: **XX** ②

SERIAL NO: **XXXXXXXXXXXX** ③ DATE: **20XX.XX.XX** ④



XXXX ⑤




- ①Refers to the front 12 digits of FG-Code,
- ②Refers to the quality of box,
- ③Refers to Box ID, product information,
- ④Packing Date,
- ⑤Last 4 digits of FG-Code


< Table 12. Description of ③ Box ID >

Box	1	2	3	4	5	6	7	8	9	10	11	12	13
Code	X	X	S	A	1	7	Z	0	0	0	0	2	1
Description	GBN Code		Base d On Actual Grade	P03-C Others-A	Last Two Bits of Year		1-9 , ABC	R ev	Serial Number (0~9,A-F)				

BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2018.07.31
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 31/36

8.3 Parallel Label

MODEL : EV121X0M-N10	①
QTY : 288	②
PACK DATE: 2017/12/04	③
PALLET : 2017YSM00252	④
 XXXXXX	⑤

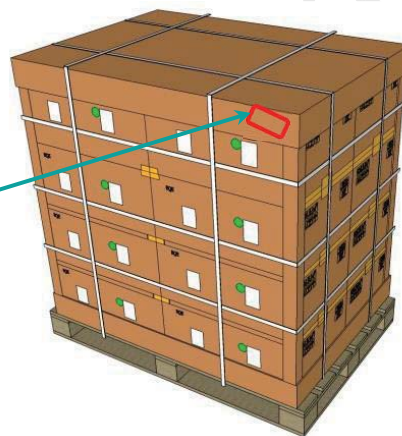

- ①Refers to the front 12 digits of FG-Code,
- ②Refers to the quality of box,
- ③Refers to Parallel ID, product information,
- ④Packing Date,
- ⑤Last 4 digits of FG-Code and Version Code

< Table 13. Description of ③ Parallel ID >

PALLET	1	2	3	4	5	6	7	8	9	10	11	12
Code	2	0	1	7	Y	A	A	0	0	2	5	2
Description	Year				month (1~9, XYZ)	Grade	Auto/M anual	Serial Number (0~9,A-F)				

9.0 MECHANICAL OUTLINE DIMENSION

Figure 6 TFT-LCD Module Outline Dimension (Front View)

4-N2 USER HOLE
Max. TORQUE: 2.0 Kgf·cm
Max. Depth: 2.7 mm

240.5±0.5

260.5±0.5(OUTLINE)

249±0.3(BEZEL OPENING)

245.76(AA)

162

162

159 (9.65)

152

5.85

18.3

88.3

172.2

242.2

138.7

91.7

46.3

140±0.3

132.4±0.3

2-4.5±0.2

204±0.5(OUTLINE)

187.5±0.3(BEZEL OPENING)

184.32(AA)

100±0.3

53.4±0.2

35.3

91.7

168.7

8.7±0.5


2-4.5±0.2

6.7±0.5

Front

BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2018.07.31
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 33/36

Figure 7 TFT-LCD Module Outline Dimension (Rear View)

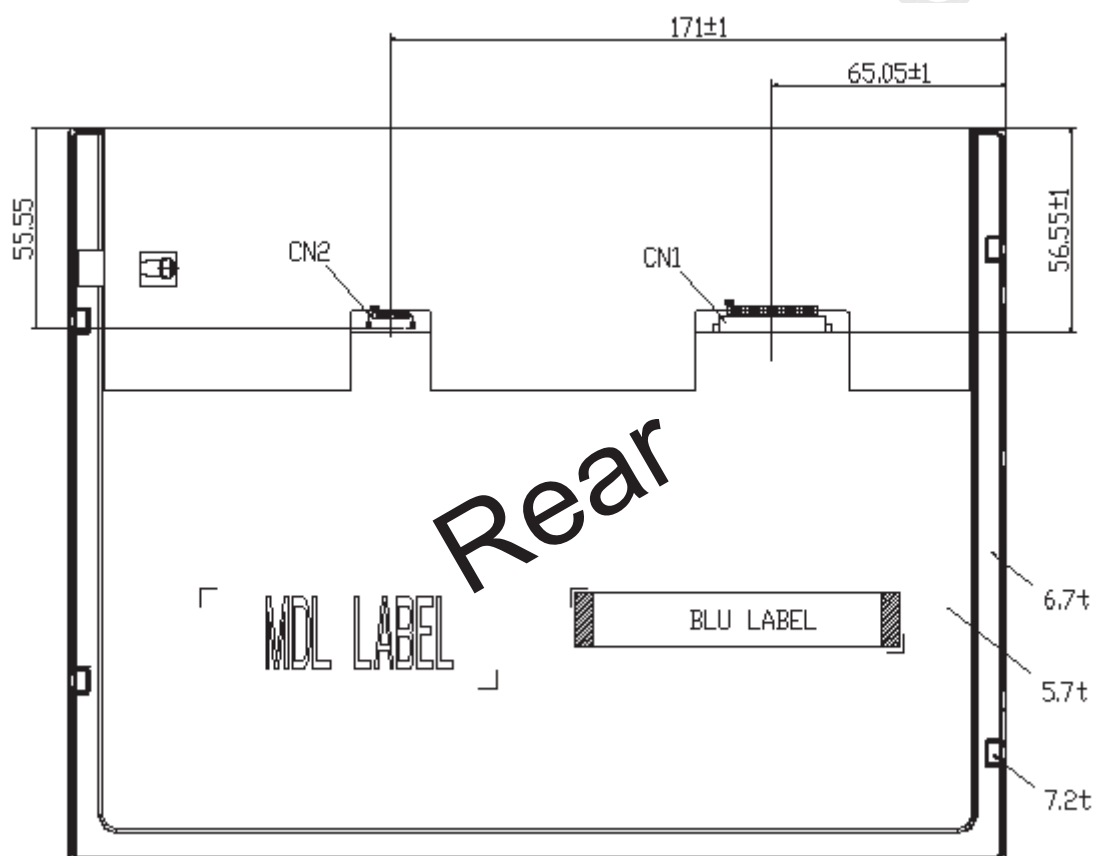

BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2019.01.10
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 32 /23

10 Handling & Cautions

10.1 Mounting Method

- The panel of the LCD consists of two thin glasses with polarizers which easily get damaged. So extreme care should be taken when handling the LCD.
- Excessive stress or pressure on the glass of the LCD should be avoided. Care must be taken to insure that no torsional or compressive forces are applied to the LCD unit when it is mounted.
- If the customer's set presses the main parts of the LCD, the LCD may show the abnormal display. But this phenomenon does not mean the malfunction of the LCD and should be pressed by the way of mutual agreement.
- To determine the optimum mounting angle, refer to the viewing angle range in the specification for each model.
- Mount a LCD module with the specified mounting parts.

10.2 caution of LCD Handling and Cleaning

- Since the LCD is made of glass, do not apply strong mechanical impact or static load onto it. Handling with care since shock, vibration, and careless handling may seriously affect the product. If it falls from a high place or receives a strong shock, the glass may be broken.
- The polarizers on the surface of panel are made from organic substances. Be very careful for chemicals not to touch the polarizers or it leads the polarizers to be deteriorated.
- If the use of a chemical is unavoidable, use soft cloth with solvent (recommended below) to clean the LCD 's surface with wipe lightly.
-IPA(Isopropyl Alcohol), Ethyl Alcohol, Trichlorotrifluoroethane
- Do not wipe the LCD's surface with dry or hard materials that will damage the polarizers and others. Do not use the following solvent.
-Water, Ketone, Aromatics
- It is recommended that the LCD be handled with soft gloves during assembly, etc. The polarizers on the LCD's surface are vulnerable to scratch and thus to be damaged by sharp particles.
- Do not drop water or any chemicals onto the LCD's surface.
- A protective film is supplied on the LCD and should be left in place until the LCD is required for operation.
- The ITO pad area needs special careful caution because it could be easily corroded. Do not contact the ITO pad area with HCFC, Soldering flux, Chlorine, Sulfur, saliva or fingerprint. To prevent the ITO corrosion, customers are recommended that the ITO area would be covered by UV or silicon.

	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2019.01.10
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 33 /23

10.3 Caution Against Static Charge

- The LCD modules use C-MOS LSI drivers, so customers are recommended that any unused input terminal would be connected to Vdd or Vss, do not input any signals before power is turn on, and ground you body, work/assembly area, assembly equipments to protect against static electricity.
- Remove the protective film slowly, keeping the removing direction approximate 30-degree not vertical from panel surface, If possible, under ESD control device like ion blower, and the humidity of working room should be kept over 50%RH to reduce the risk of static charge.
- Avoid the use work clothing made of synthetic fibers. We recommend cotton clothing or other conductivity-treated fibers.
- In handling the LCD, wear non-charged material gloves. And the conducting wrist to the earth and the conducting shoes to the earth are necessary.

10.4Caution For operation

- It is indispensable to drive the LCD within the specified voltage limit since the higher Voltage than the limit causes the shorter LCD's life. An electro-chemical reaction due to DC causes undesirable deterioration of the LCD so that the use of DC drive should avoid.
- Do not connect or disconnect the LCD to or from the system when power is on.
- Never use the LCD under abnormal conditions of high temperature and high humidity.
- When expose to drastic fluctuation of temperature (hot to cold or cold to hot) ,the LCD may be affected; Specifically, drastic temperature fluctuation from cold to hot ,produces dew on the LCD's surface which may affect the operation of the polarizer and the LCD.
- Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD may turn black at temperature above its operational range. However those phenomena do not mean malfunction or out of order with the LCD. The LCD will revert to normal operation once the temperature returns to the recommended temperature range for normal operation.
- Do not display the fixed pattern for a long time because it may develop image sticking due to the LCD structure. If the screen is displayed with fixed pattern, use a screen saver.

BOE	PRODUCT GROUP	REV.	DATE
	TFT- LCD PRODUCT	P0	2019.01.10
SPEC. NUMBER	EV121X0M-N10-1850 Product Specification		PAGE 34 /23

10.5Packaging

- Modules use LCD element, and must be treated as such.
 - Avoid intense shock and falls from a height.
 - To prevent modules from degradation, do not operate or store them exposed directly to sunshine or high temperature/humidity for long periods.

10.6Storage

- A slight dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal open circuit. Relative humidity of the environment should therefore be kept below 60%RH.
- Original protective film should be used on LCD' s surface (polarizer). Adhesive type protective film should be avoided, because it may change color and/or properties of the polarizers.
- Do not store the LCD near organic solvents or corrosive gasses.
- Keep the LCD safe from vibration, shock and pressure.
- Black or white air-bubbles may be produced if the LCD is stored for long time in the lower temperature or mechanical shocks are applied onto the LCD.
- In the case of storing for a long period of time for the purpose or replacement use, the following ways are recommended.
 - Store in a polyethylene bag with sealed so as not to enter fresh air outside in it.
 - Store in a dark place where neither exposure to direct sunlight nor light is.
 - Keep temperature in the specified storage temperature range.
 - Store with no touch on polarizer surface by the anything else. If possible, store the LCD in the packaging situation LCD when it was delivered.

10.7 Safety

- For the crash damaged or unnecessary LCD, it is recommended to wash off liquid crystal by either of solvents such as acetone and ethanol an should be burned up later.
- In the case the LCD is broken, watch out whether liquid crystal leaks out or not. If your hands touch the liquid crystal, wash your hands cleanly with water an soap as soon as possible.
- If you should swallow the liquid crystal, first, wash your mouth thoroughly with water, then drink a lot of water and induce vomiting, and then, consult a physician.
- If the liquid crystal should get in your eyes, flush your eyes with running water for at least fifteen minutes.
- If the liquid crystal touches your skin or clothes, remove it and wash the affected part of your skin or clothes with soap and running water.