

**PROPRIETARY NOTE**

THIS SPECIFICATION IS THE PROPERTY OF BOE BJ AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOE BJ AND MUST BE RETURNED TO BOE BJ UPON ITS REQUEST

**BOE**

SPEC. NUMBER

PRODUCT GROUP

Rev.

ISSUE DATE

PAGE

TLCM

P1

2016.08.12

1

OF 32

**NV156FHM-T00****Preliminary Product Specification****Rev. P1****CHONGQING BOE OPTOELECTRONICS TECHNOLOGY CO.,LTD**



PRODUCT GROUP		REV	ISSUE DATE	BOE
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 2 OF 32
REVISION HISTORY				
REV.	ECN No.	DESCRIPTION OF CHANGES	DATE	PREPARED
P0	-	Initial Release	2016.05.06	Xuzhijun zuocheng
P1	-	EDID update, Add Touch Timing	2016.8.12	Xuzhijun wangxiaojun

R2013-9024-O(2/3)

A4(210 X 297)



PRODUCT GROUP		REV	ISSUE DATE	BOE
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 3 OF 32
Contents				
No.	Items			Page
	REVISION HISTORY			2
	CONTENTS			3
1.0	General Description			4
2.0	Absolute Maximum ratings			6
3.0	Electrical specifications.			7
4.0	Optical specifications.			10
5.0	Interface Connection			15
6.0	Signal Timing Specification			18
7.0	Input Signals, Basic Display Colors & Gray Scale of Colors			20
8.0	Power Sequence			21
9.0	Mechanical Characteristics			22
10.0	Reliability Test			23
11.0	Handling & Cautions.			23
12.0	Label			24
13.0	Packing information			25
14.0	Mechanical Outline Dimension			27
15.0	EDID Table			29

R2013-9024-O(3/3)

A4(210 X 297)



PRODUCT GROUP		REV	ISSUE DATE	BOE
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 4 OF 32
1.0 General Description				
1.1 Application				
● Notebook PC With Touch function				
1.2 General Specification				
1.2.1.General LCM Specification(Table 1.)				
<Table 1. General LCM Specifications>				
Parameter	Specification	Unit	Remarks	
Active area	344.16 (H) × 193.59 (V)	mm		
Number of pixels	1920 (H) × 1080 (V)	pixels		
Pixel pitch	0.17925 (H) X 0.17925 (V)	mm		
Pixel arrangement	RGB Vertical stripe			
Display colors	262K	colors		
Display mode	Normally Black			
Outline Dimension	350.76(H) × 205.825(V)	mm		
Weight	385 (max)	g		
Back-light	Lower Down side, 1-LED Lighting Bar type		Note 1	
Power consumption	P <sub>D</sub> : 0.9	W	@mosaic	
	P <sub>BL</sub> : 3.6	W		
	P <sub>total</sub> :4.5	W	@mosaic	

R2013-9024-O(3/3)

A4(210 X 297)



PRODUCT GROUP		REV	ISSUE DATE	BOE
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 5 OF 32
1.2.2.General Touch Specification(Table 2.)				
<Table 2. General Touch Specifications>				
Parameter	Specification	Unit	Remarks	
Type of Touch Sensor	Self Capacitance			
Touch Structure	On Cell			
Panel Size	15.6"			
Outline Dimension	N/A(Cover Lens Free)	mm		
TP View Area	N/A(Cover Lens Free)	mm		
TP Active Area	X 345.96 × Y 193.74	mm		
Total Thickness	N/A(Cover Lens Free)	mm		
Interface	USB			
Report Rate	Follow win8 – 100Hz			
Multi-Touch Point	10 points			
Input method	Finger			
Touch panel sensor IC	G7500			
Channel	1500			
Surface treatment	Normal AG			
Surface Hardness	3	H		
Support OS	Win8.x and Win10 compliant			
TP Power Consumption	200 max.	mW	@ 5 finger	

R2013-9024-O(3/3)

A4(210 X 297)

PRODUCT GROUP		REV	ISSUE DATE	<b>BOE</b>
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 6 OF 32

## 2.0 ABSOLUTE MAXIMUM RATINGS


The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 3.

< Table 3. Absolute Maximum Ratings >

Ta=25+/-2°C

Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Supply Voltage	V <sub>DD</sub>	-0.3	4.0	V	Note 1
Logic Supply Voltage	V <sub>IN</sub>	V <sub>SS</sub> -0.3	V <sub>DD</sub> +0.3	V	
Operating Temperature	T <sub>OP</sub>	0	+50	°C	Note 2
Storage Temperature	T <sub>ST</sub>	-20	+60	°C	

- Notes : 1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions.
2. Temperature and relative humidity range are shown in the figure below.  
 95 % RH Max. ( 40 °C ≥ Ta)  
 Maximum wet - bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation.

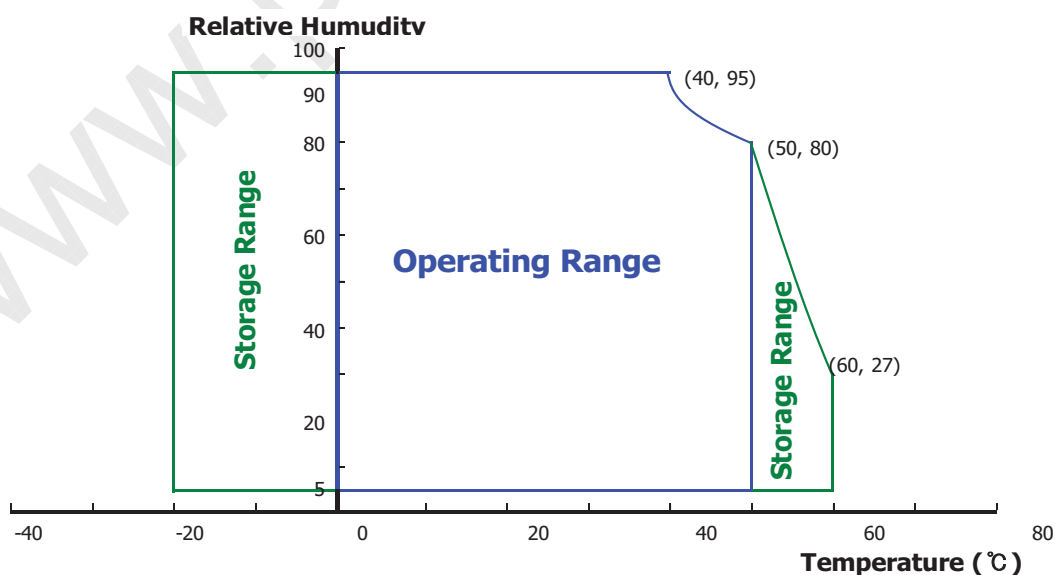



PRODUCT GROUP		REV	ISSUE DATE	<b>BOE</b>
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 7 OF 32

### 3.0 ELECTRICAL SPECIFICATIONS

#### 3.1 Electrical Specifications

< Table 4. Electrical specifications >

Ta=25+/-2°C

Parameter		Min.	Typ.	Max.	Unit	Remarks
Power Supply Voltage	V <sub>DD</sub>	3.0	3.3	3.6	V	Note 1
Permissible Input Ripple Voltage	V <sub>RF</sub>	-	-	100	mV	At V <sub>DD</sub> = 3.3V
Power Supply Current	I <sub>DD</sub>	-	-	273	mA	Note 1
Differential Input Voltage	V <sub>ID</sub>	100	-	600	mV	
Power Consumption	P <sub>D</sub>	-	-	0.9	W	Note 1
	P <sub>BL</sub>	-	-	3.6	W	Note 2
	P <sub>total</sub>	-	-	4.5	W	

Notes : 1. The supply voltage is measured and specified at the interface connector of LCM.  
The current draw and power consumption specified is for 3.3V at 25°C.

- a) Typ : Mosaic Pattern
- b) Max : Skip sub pixel255

2. Calculated value for reference (VLED × ILED)

PRODUCT GROUP		REV	ISSUE DATE		BOE	
TLCM PRODUCT		P1	2016.08.12			
SPEC. NUMBER	SPEC. TITLE				PAGE	
	NV156FHM-T00 Preliminary Product Specification				8 OF 32	
3.2 Backlight Unit						
< Table 5. LED Driving guideline specifications >						
Ta=25+/-2°C						
Parameter		Min.	Typ.	Max.	Unit	Remarks
LED Forward Voltage	V <sub>F</sub>	-	-	3.3	V	-
LED Forward Current	I <sub>F</sub>	-	23	-	mA	-
LED Power Consumption	P <sub>LED</sub>	-	-	3.6	W	Note 1
LED Life-Time	N/A	15,000	-	-	Hour	I <sub>F</sub> = 23mA
Power supply voltage for LED Driver		V <sub>LED</sub>	5	12	21	V
EN Control Level	Backlight on	2.5		5.0	V	
	Backlight off	0		1.0	V	
PWM Control Level	PWM High Level	2.5		5.0	V	
	PWM Low Level	0		0.1	V	
PWM Control Frequency		F <sub>PWM</sub>	100	-	10,000	Hz
Duty Ratio		-	1	-	100	%
						Note3

Notes : 1. Power supply voltage12V for LED Driver  
Calculator Value for reference I<sub>F</sub> × V<sub>F</sub> × 36/ efficiency = P<sub>LED</sub>  
2. The LED Life-time define as the estimated time to 50% degradation of initial luminous.  
3. 1% duty cycle is achievable with a dimming frequency less than 1KHz.

8

Notes : 1. Power supply voltage 12V for LED Driver

Calculator Value for reference  $I_F \times V_F \times 36 / \text{efficiency} = P_{LED}$


2. The LED Life-time define as the estimated time to 50% degradation of initial luminous.

3. 1% duty cycle is achievable with a dimming frequency less than 1KHz.



PRODUCT GROUP		REV	ISSUE DATE	BOE
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 9 OF 32

### 3.3 LED structure

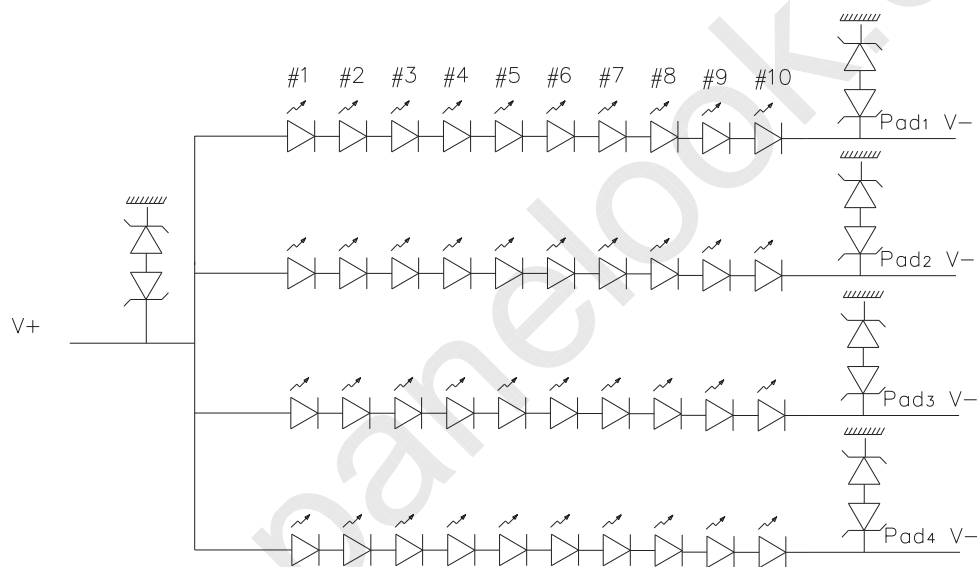

PRODUCT GROUP		REV	ISSUE DATE	<b>BOE</b>
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 10 OF 32

## 4.0 OPTICAL SPECIFICATION

### 4.1 Overview

The test of Optical specifications shall be measured in a dark room (ambient luminance  $\leq 1$  lux and temperature =  $25 \pm 2^\circ\text{C}$ ) with the equipment of Luminance meter system (Goniometer system and TOPCON BM-5) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of  $\theta$  and  $\phi$  equal to  $0^\circ$ . We refer to  $\theta\phi=0$  ( $=\theta_3$ ) as the 3 o'clock direction (the "right"),  $\theta\phi=90$  ( $=\theta_{12}$ ) as the 12 o'clock direction ("upward"),  $\theta\phi=180$  ( $=\theta_9$ ) as the 9 o'clock direction ("left") and  $\theta\phi=270$  ( $=\theta_6$ ) as the 6 o'clock direction ("bottom"). While scanning  $\theta$  and/or  $\phi$ , the center of the measuring spot on the Display surface shall stay fixed. The backlight should be operating for 30 minutes prior to measurement. VDD shall be  $3.3 \pm 0.3\text{V}$  at  $25^\circ\text{C}$ . Optimum viewing angle direction is 6 'clock.

### 4.2 Optical Specifications

<Table 6. Optical Specifications>

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing Angle range	Horizontal	$\Theta_3$	CR > 10	-	85	-	Deg.	Note 1
		$\Theta_9$		-	85	-	Deg.	
	Vertical	$\Theta_{12}$		-	85	-	Deg.	
		$\Theta_6$		-	85	-	Deg.	
Luminance Contrast ratio		CR	$\Theta = 0^\circ$	-	800			Note 2
Luminance of White	5 Points	$Y_w$	$\Theta = 0^\circ$ $I_{LED} = 23.0mA$	210	250	-	cd/m <sup>2</sup>	Note 3
White Luminance uniformity	5 Points	$\Delta Y5$		80%	-	-		Note 4
	13 Points	$\Delta Y13$	60%	-	-			
White Chromaticity		$x_w$	$\Theta = 0^\circ$	0.283	0.313	0.343		Note 5
		$y_w$		0.299	0.329	0.359		
Reproduction of color	Red	$x_R$	$\Theta = 0^\circ$	-0.03	0.585	+0.03		
		$y_R$			0.364			
		Green			$x_G$		0.350	
	$y_G$				0.580			
	Blue	$x_B$			0.163			
		$y_B$			0.143			
	Gamut							
Response Time (Rising + Falling)		$T_{RT}$	Ta= 25° C $\Theta = 0^\circ$	-	30	35	ms	Note 6
Cross Talk		CT	$\Theta = 0^\circ$	-	-	2.0	%	Note 7



PRODUCT GROUP		REV	ISSUE DATE	BOE
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 11 OF 32

Notes :

1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see FIGURE 1).

2. Contrast measurements shall be made at viewing angle of  $\Theta= 0$  and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state .  
(see FIGURE 1) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

3. Center Luminance of white is defined as luminance values of 5 point average across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.

4. The White luminance uniformity on LCD surface is then expressed as :  $\Delta Y$  =Minimum Luminance of 5(or 13) points / Maximum Luminance of 5(or 13) points.  
(see FIGURE 2 and FIGURE 3).

5. The color chromaticity coordinates specified in Table 5 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.


6. The electro-optical response time measurements shall be made as FIGURE 4 by switching the “data” input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is Tr, and 90% to 10% is Td.

7. Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (YA) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (YB) of that same area when any adjacent area is driven dark.  
(See FIGURE 5).

PRODUCT GROUP		REV	ISSUE DATE	<b>BOE</b>
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 12 OF 32


#### 4.3 Optical measurements

**Figure 1. Measurement Set Up**

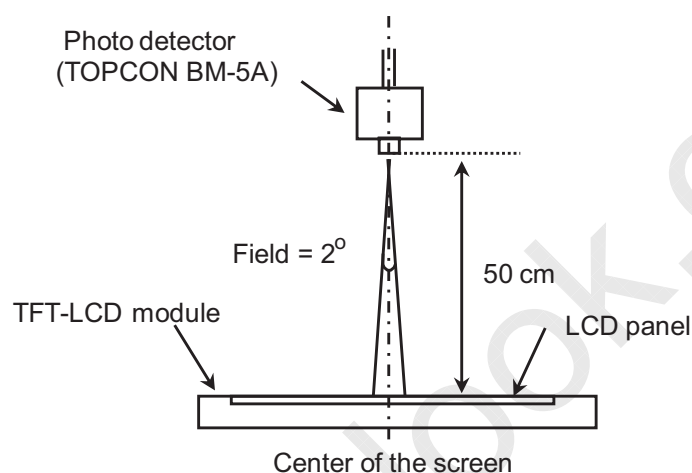

Optical characteristics measurement setup


**Figure 2. White Luminance and Uniformity Measurement Locations (5 points)**

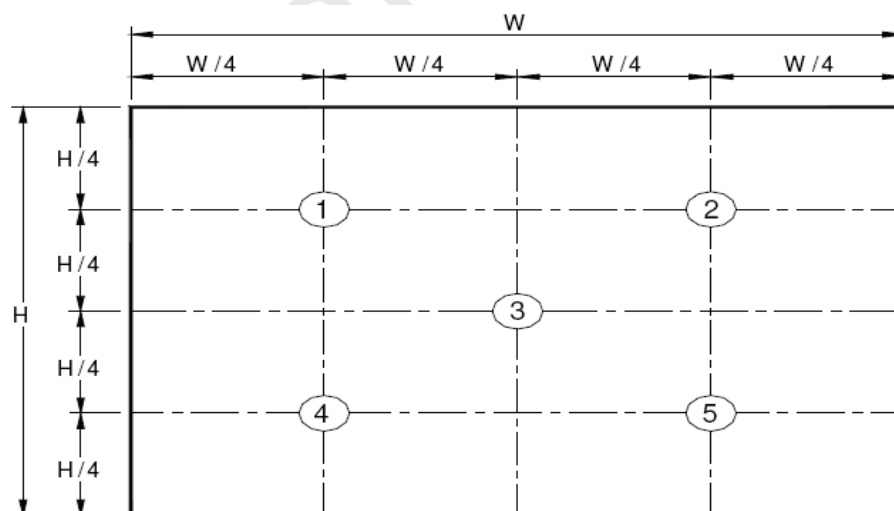

Center Luminance of white is defined as luminance values of center 5 points across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.


PRODUCT GROUP		REV	ISSUE DATE	<b>BOE</b>
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 13 OF 32

**Figure 3. Uniformity Measurement Locations (13 points)**

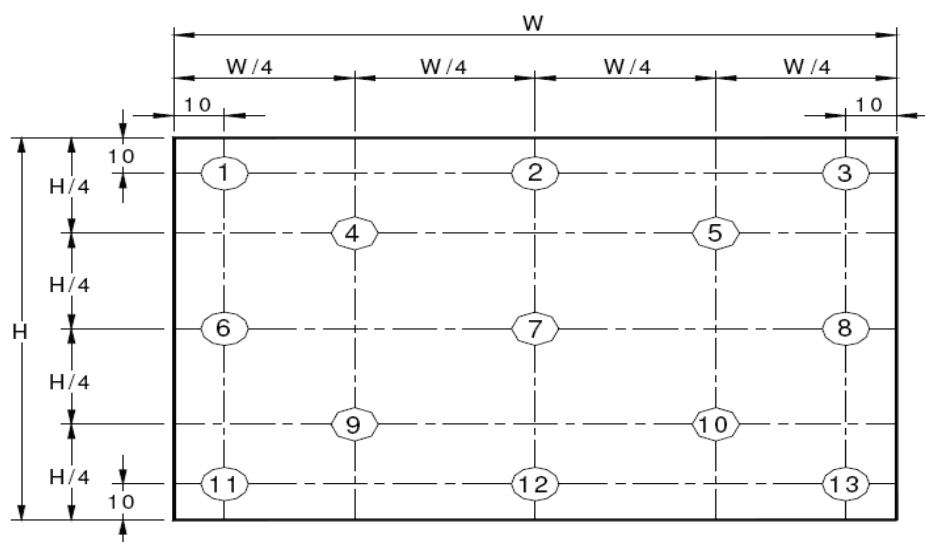

The White luminance uniformity on LCD surface is then expressed as :  $\Delta Y_5$  = Minimum Luminance of five points / Maximum Luminance of five points (see FIGURE 2) ,  $\Delta Y_{13}$  = Minimum Luminance of 13 points /Maximum Luminance of 13 points (see FIGURE 3).


**Figure 4. Response Time Testing**

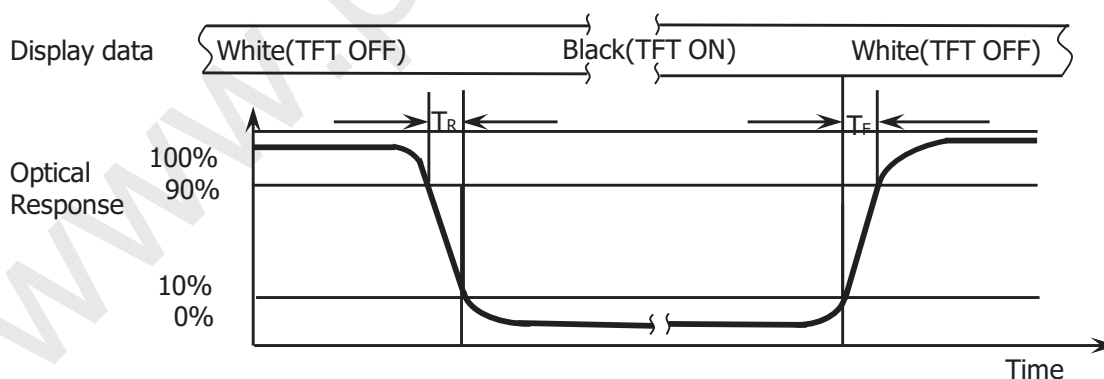

The electro-optical response time measurements shall be made as shown in FIGURE 4 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is  $T_d$  and 90% to 10% is  $T_r$ .

PRODUCT GROUP		REV	ISSUE DATE	<b>BOE</b>
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 14 OF 32

**Figure 5. Cross Modulation Test Description**

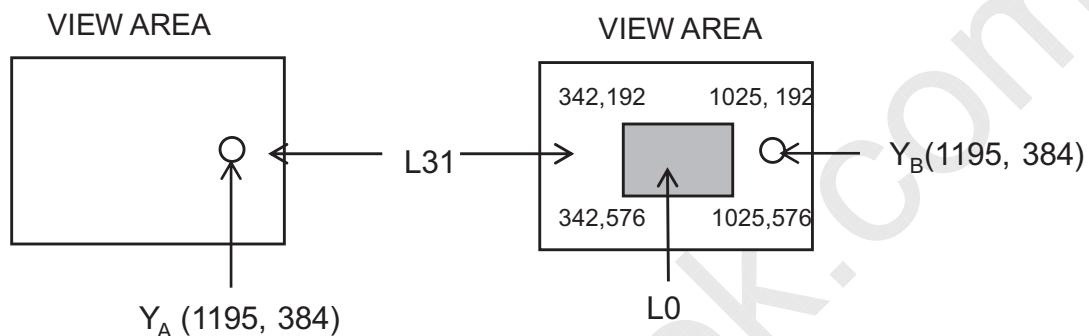

$$\text{Cross-Talk (\%)} = \left| \frac{Y_B - Y_A}{Y_A} \right| \times 100$$

Where:

$Y_A$  = Initial luminance of measured area (cd/m<sup>2</sup>)

$Y_B$  = Subsequent luminance of measured area (cd/m<sup>2</sup>)

The location measured will be exactly the same in both patterns

Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance ( $Y_A$ ) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance ( $Y_B$ ) of that same area when any adjacent area is driven dark (Refer to FIGURE 5).

PRODUCT GROUP		REV	ISSUE DATE	BOE
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 15 OF 32

## 5.0 INTERFACE CONNECTION.

### 5.1 Electrical Interface Connection

The electronics interface connector is **20525-040E-02**.


The connector interface pin assignments are listed in Table 7.

<Table 7. Pin Assignments for the Interface Connector>

PIN NO	Symbol Function	PIN NO	Symbol Function
1	CABC_ENIN	21	LED Ground
2	Ground	22	LED enable pin(+3.3V Input)
3	eDP RX channel 1 negative	23	System PWM Signal Input
4	eDP RX channel 1 positive	24	Line synchronization
5	Ground	25	No Connection
6	eDP RX channel 0 negative	26	LED Power Supply 5V-21V
7	eDP RX channel 0 positive	27	LED Power Supply 5V-21V
8	Ground	28	LED Power Supply 5V-21V
9	eDP AUX CH positive	29	LED Power Supply 5V-21V
10	eDP AUX CH negative	30	No Connection
11	Ground	31	No Connection
12	Power Supply, 3.3V (typ.)	32	No Connection
13	Power Supply, 3.3V (typ.)	33	No Connection
14	Panel self test enable	34	No Connection
15	Ground	35	Ground
16	Ground	36	D+
17	Hot plug detect output	37	D-
18	LED Ground	38	Ground
19	LED Ground	39	Touch enable
20	LED Ground	40	Touch power supply 3.3V

PRODUCT GROUP		REV	ISSUE DATE	<b>BOE</b>
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 16 OF 32

## 5-2. eDP Interface

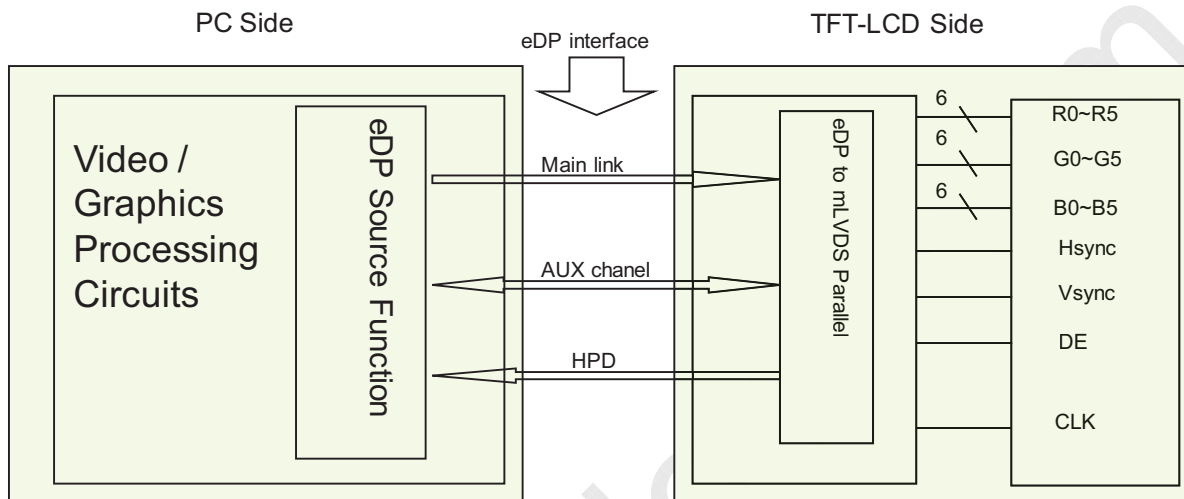

Note. Transmitter : Novatek NT71832 or equivalent.  
Transmitter is not contained in Module.

## 5.3.eDP Input signal

Lane 0	
R0-5:0	G0-5:4
G0-3:0	B0-5:2
B0-1:0	R1-5:0
G1-5:0	B1-5:4
B1-3:0	R2-5:2
R2-1:0	G2-5:0
B2-5:0	R3-5:4
R3-3:0	G3-5:2
G3-1:0	B3-5:0





PRODUCT GROUP		REV	ISSUE DATE	<b>BOE</b>
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 17 OF 32

#### 5.4 Back-light & LCM Interface Connection

<Table 8. Pin Assignments for the BLU & LCM Connector>

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	Vout	LED anode connection	6	NC	NC Connection
2	Vout	LED anode connection	7	LED1	LED cathode connection
3	Vout	LED anode connection	8	LED2	LED cathode connection
4	NC	NC	9	LED3	LED cathode connection
5	NC	NC	10	LED4	LED cathode connection



PRODUCT GROUP		REV	ISSUE DATE	<b>BOE</b>
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 18 OF 32

## 6.0 SIGNAL TIMING SPECIFICATION

6.1 The NV156FHM-T00 is operated by the DE only.

Item		Symbols	Min	Typ	Max	Unit
Clock	Frequency	1/Tc	100	152.6	160	MHz
Frame Period		Tv	1112	1125	1238	lines
			-	60	-	Hz
			25	16.67	15.15	ms
Vertical Display Period		Tvd	-	1080	-	lines
One line Scanning Period		Th	2080	2230	2400	clocks
Horizontal Display Period		Thd	-	1920	-	clocks


PRODUCT GROUP		REV	ISSUE DATE	BOE
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 19 OF 32

## 6.2 eDP Rx Interface Timing Parameter

The specification of the eDP Rx interface timing parameter is shown in Table 9.

<Table 9.1 eDP Rx Interface Timing Specification>

Item	Symbol	Min	Typ	Max	Unit	Remark
Spread spectrum clock	ssc		0.5		%	
Differential peak-to-peak input voltage at package pins	VRX-DIFFp-p	500	0	1000	mV	
Rx input DC common mode voltage	VRX_DC_CM	-	GND	-	V	
Differential termination resistance	RRX-DIFF	80	-	100	$\Omega$	
Single-ended termination resistance	RRX-SE	40	-	60	$\Omega$	
Rx short circuit current limit	IRX_SHORT	-	-	20	mA	
Intra-pair skew at Rx package pins (HBR) RX intra-pair skew tolerance at HBR	LRX_SKEW_INTRA_PAIR	-	-	150	ps	

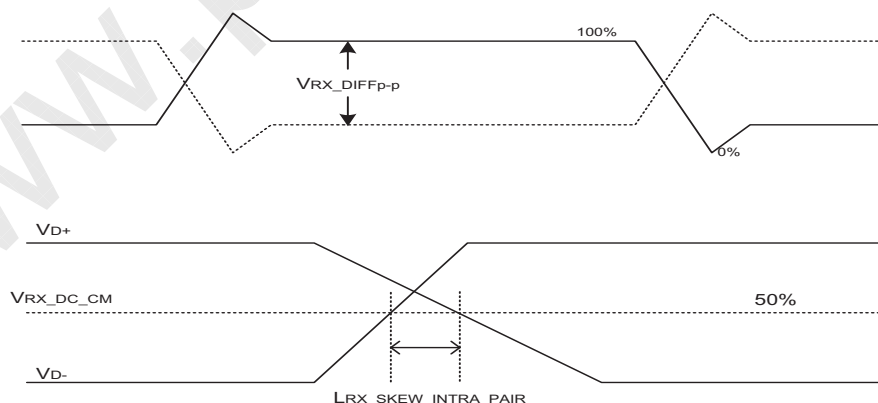


PRODUCT GROUP		REV	ISSUE DATE	BOE
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 20 OF 32

### 6.3 Touch Interface Timing Parameter

The specification of the Touch interface timing parameter is shown in Table 9.2

<Table 9.2 Touch Interface Timing Specification>

ITEM	Symbol	Time	Unit
MCU Power ON ~ MCU Reset(MCU Internal Reset)	T1	$\geq 400\mu\text{s}$	$\mu\text{s}$
MCU Reset ~ USB Commands	T2	$\geq 50\text{ms}$	ms
USB Commands ~ Touch IC Reset	T3	$\geq 600\text{ms}$	ms
Touch IC Reset ~ Touch IC Sensing Start	T4	$\geq 500\text{ms}$	ms
Touch IC Reset low-level width	T5	$\geq 10$	$\mu\text{s}$

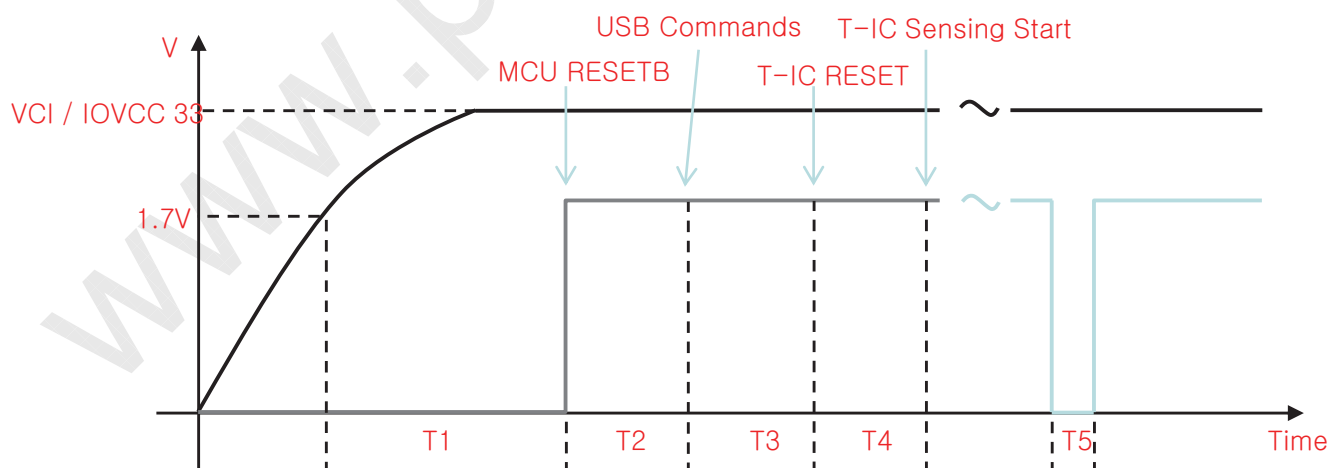



PRODUCT GROUP		REV	ISSUE DATE	<b>BOE</b>
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 21 OF 32


## 7.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS

	Colors & Gray scale	Data signal																	
		R0	R1	R2	R3	R4	R5	G0	G1	G2	G3	G4	G5	B0	B1	B2	B3	B4	B5
Basic colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Light Blue	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Purple	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray scale of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Darker	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	↑					↑					↑							
	▽	↓					↓					↓							
	Brighter	1	0	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	▽	0	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
Gray scale of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0
	Darker	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0
	△	↑					↑					↑							
	▽	↓					↓					↓							
	Brighter	0	0	0	0	0	0	1	0	1	1	1	1	0	0	0	0	0	0
	▽	0	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
Gray scale of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0
	△	↑					↓					↑							
	▽	↓					↑					↓							
	Brighter	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1
	▽	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
Gray scale of White & Black	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	1	0	0	0	0	0	1	0	0	0	0	0	1	0	0	0	0	0
	Darker	0	1	0	0	0	0	0	1	0	0	0	0	0	1	0	0	0	0
	△	↑					↑					↑							
	▽	↓					↓					↓							
	Brighter	1	0	1	1	1	1	1	0	1	1	1	1	1	0	1	1	1	1
	▽	0	1	1	1	1	1	0	1	1	1	1	1	0	1	1	1	1	1
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

PRODUCT GROUP		REV	ISSUE DATE	<b>BOE</b>
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 22 OF 32

## 8.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below

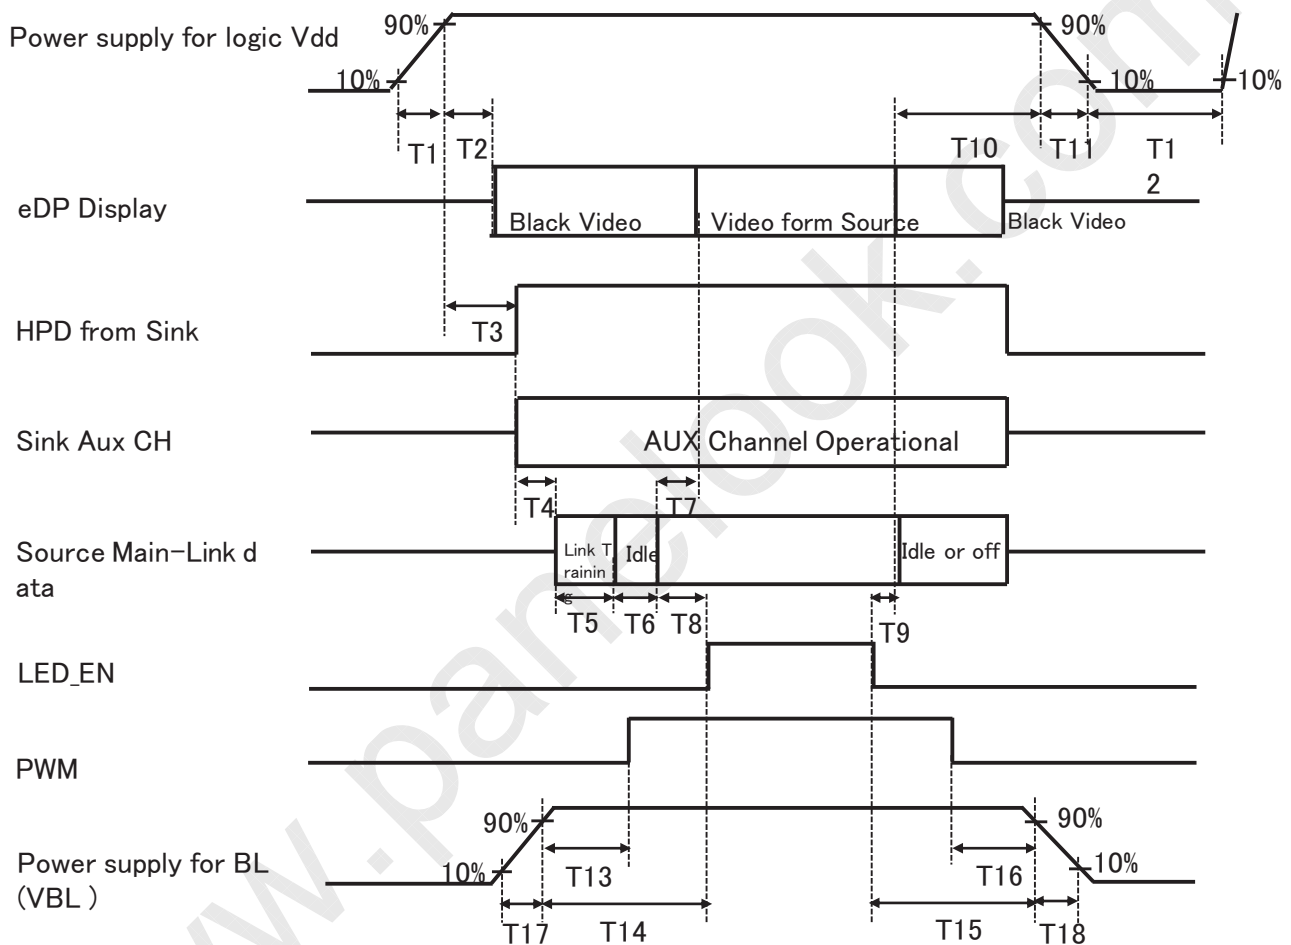

- $0.5\text{ms} \leq T1 \leq 10\text{ms}$
- $0\text{ms} \leq T2 \leq 200\text{ms}$
- $0\text{ms} \leq T3 \leq 200\text{ms}$
- $0\text{ms} \leq T13$
- $0\text{ms} \leq T14$
- $0\text{ms} \leq T17$
- $0\text{ms} \leq T7 \leq 50\text{ms}$
- $0\text{ms} \leq T10 \leq 500\text{ms}$
- $0\text{ms} \leq T11 \leq 10\text{ms}$
- $150\text{ms} \leq T12$
- $0\text{ms} \leq T15$
- $0\text{ms} \leq T16$
- $0\text{ms} \leq T18$

### Notes:

- When the power supply VDD is 0V, keep the level of input signals on the low or keep high impedance.
- Do not keep the interface signal high impedance when power is on. Back Light must be turn on after power for logic and interface signal are valid.



PRODUCT GROUP		REV	ISSUE DATE	<b>BOE</b>
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 23 OF 32

## 9.0 MECHANICAL CHARACTERISTICS

### 9.1 Dimensional Requirements

FIGURE 6 shows mechanical outlines for the model NV156FHM-T00.

Other parameters are shown in Table 10.

<Table 10. Dimensional Parameters>

Parameter	Specification	Unit
Active Area	344.16 (H) × 193.59(V)	
Number of pixels	1920 (H) X 1080 (V) (1 pixel = R + G + B dots)	
Pixel pitch	0.17925 (H) X 0.17925 (V)	mm
Pixel arrangement	RGB Vertical stripe	
Display colors	262K	
Display mode	Normally Black	
Dimensional outline	350.76(H)*216.195(V) (W/PCB)*3.2(Max)	mm
Weight	385(Max)	gram
Back Light	Connector :IS050-L30B-C10	
	LED, Horizontal-LED Array type	

### 9.2 Mounting

See FIGURE 6.

### 9.3 Glare and Polarizer Hardness.

The surface of the LCD has an glare coating to maximize readability and hard coating to reduce scratching.

### 9.4 Light Leakage

There shall not be visible light from the back-lighting system around the edges of the screen as seen from a distance 50cm from the screen with an overhead light level of 350lux.



PRODUCT GROUP		REV	ISSUE DATE	<b>BOE</b>
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 24 OF 32

## 10.0 RELIABILITY TEST

The Reliability test items and its conditions are shown in below.

<Table 11. Reliability test>

No	Test Items	Conditions
1	High temperature storage test	Ta = 60 °C, 240 hrs
2	Low temperature storage test	Ta = -20 °C, 240 hrs
3	High temperature & high humidity operation test	Ta = 40 °C, 80%RH, 240 hrs
4	High temperature operation test	Ta = 50 °C, 240 hrs
5	Low temperature operation test	Ta = -20 °C, 240 hrs
6	Thermal shock	Ta = -20 °C ↔ 60 °C (0.5 hr), 100 cycle
7	Vibration test (non-operating)	10~1000 Hz, 10 m/s <sup>2</sup> Half Sine X,Y,Z / Sweep rate : 1 hour
8	Shock test (non-operating)	220G, Half Sine Wave 2msec ±X, ±Y, ±Z Once for each direction
9	Electro-static discharge test (non-operating)	Air : 150 pF, 330Ω, 15 KV Contact : 150 pF, 330Ω, 8 KV

## 11.0 HANDLING & CAUTIONS

### (1) Cautions when taking out the module

- Pick the pouch only, when taking out module from a shipping package.

### (2) Cautions for handling the module

- As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
- As the LCD panel and back - light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
- As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
- Do not pull the interface connector in or out while the LCD module is operating.
- Put the module display side down on a flat horizontal plane.
- Handle connectors and cables with care.

### (3) Cautions for the operation

- When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
- Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.





PRODUCT GROUP		REV	ISSUE DATE	BOE
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 25 OF 32

#### (4) Cautions for the atmosphere

- Dew drop atmosphere should be avoided.
- Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.

#### (5) Cautions for the module characteristics

- Do not apply fixed pattern data signal to the LCD module at product aging.
- Applying fixed pattern for a long time may cause image sticking.

#### (6) Other cautions

- Do not disassemble and/or reassemble the LCD module.
- Do not re-adjust variable resistor or switch.
- When returning the module for repair, please ensure the module not to be broken. We recommend to use the original shipping packages.

## 12.0 LABEL

### (1) TLCM label

NT156WHM-T00		BOE
		
XXXXXXXXXXXXXXXXXX		ECO RoHS Compliant C <sup>®</sup> ALUS MADE IN CHINA
	CN-OHXNNJ-79088- XXX-XXXX-X00	
	MADE IN CHINA	
	DP/N OHXNNJ	

### TLCM ID 编码规则:

序列号	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
代码																	
描述	GBN		等级	line	年	月	FG-Code后4位					Serial Number					



PRODUCT GROUP		REV	ISSUE DATE	BOE
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 26 OF 32

## (2) High voltage caution label

	HIGH VOLTAGE CAUTION	COLD CATHODE FLUORESCENT LAMP IN LCD PANEL CONTAINS A SMALL AMOUNT OF MERCURY. PLEASE FOLLOW LOCAL OR- DINANCES OR REGULATIONS FOR DISPOSAL.
	RISK OF ELECTRIC SHOCK. DISCONNECT THE ELECTRIC POWER BEFORE SERVICING	

## (3) Box label

		CHONGCHING BC ELECTRONICS TECHNOLOGY CO., LTD	
MODEL: XXXXXXX-XXX	①	Q'TY: XX	②
SERIAL NO: XXXXXXXXXXX	③	DATE: XXXXXXXX	④
BOX ID 条形码			
XXXXXXXXXX	⑤	XXXX	⑥
		XXXX	⑦

蓝色字体为后打印标识, 说明如下:

1. FG-CODE
2. Box 产品数量
3. Box ID, 编码规则如下
4. Box Packing 日期
5. 产品物料号(客户端)
6. FG-CODE 后四位

Box ID 编码规则

序列号	1	2	3	4	5	6	7	8	9	10	11	12	13
代码	S	L	S	T	1	4	3	D	0	0	1	H	D
描述	GBN代码		等级	TM1	年份		月	Rev	Serial Number				

R2013-9024-O(3/3)

A4(210 X 297)


PRODUCT GROUP		REV	ISSUE DATE	BOE
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 27 OF 32

## 13.0 PACKING INFORMATION

### 13.1 Packing order


-. Put Pad into the inner box

-. Put module into the paper spacer and modules bundled by PE Bag

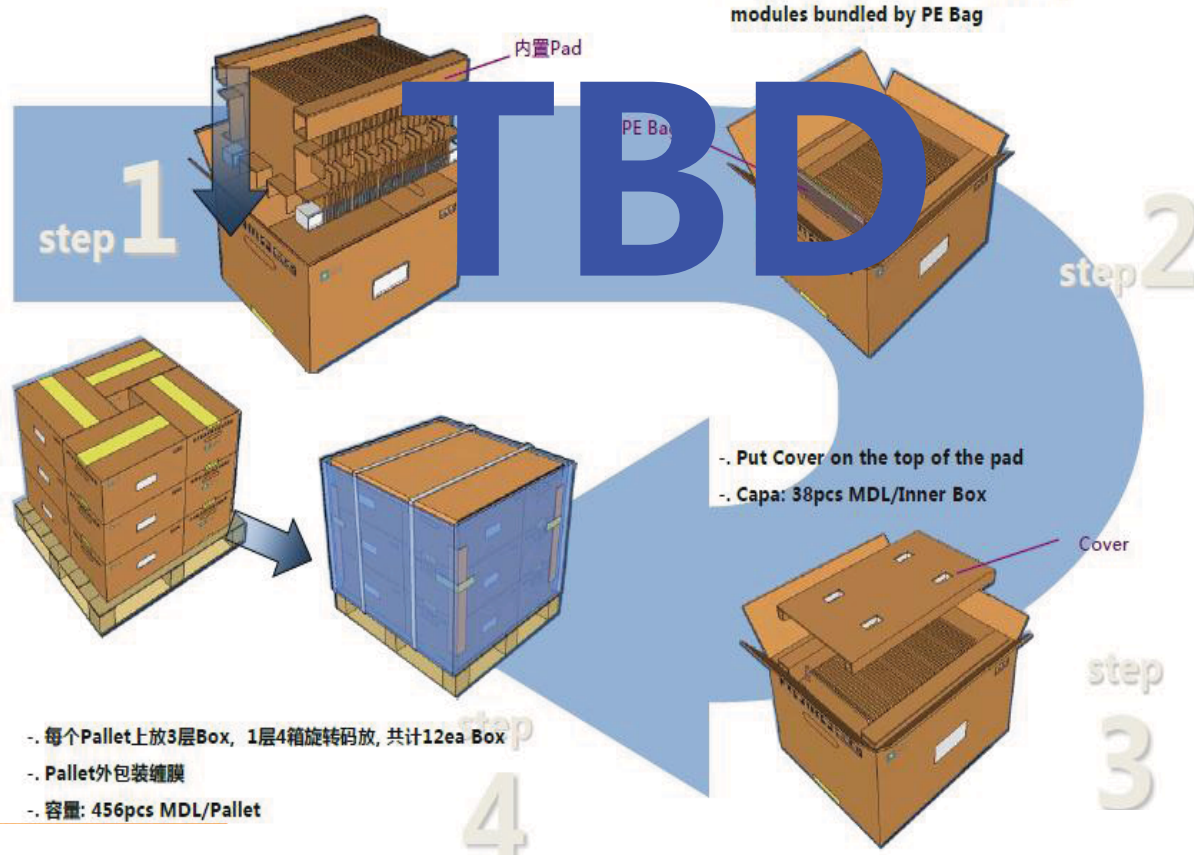

### 13.2 Notes

- Box Dimension: TBD
- Package Quantity in one Box: pcs
- Total Weight: TBD

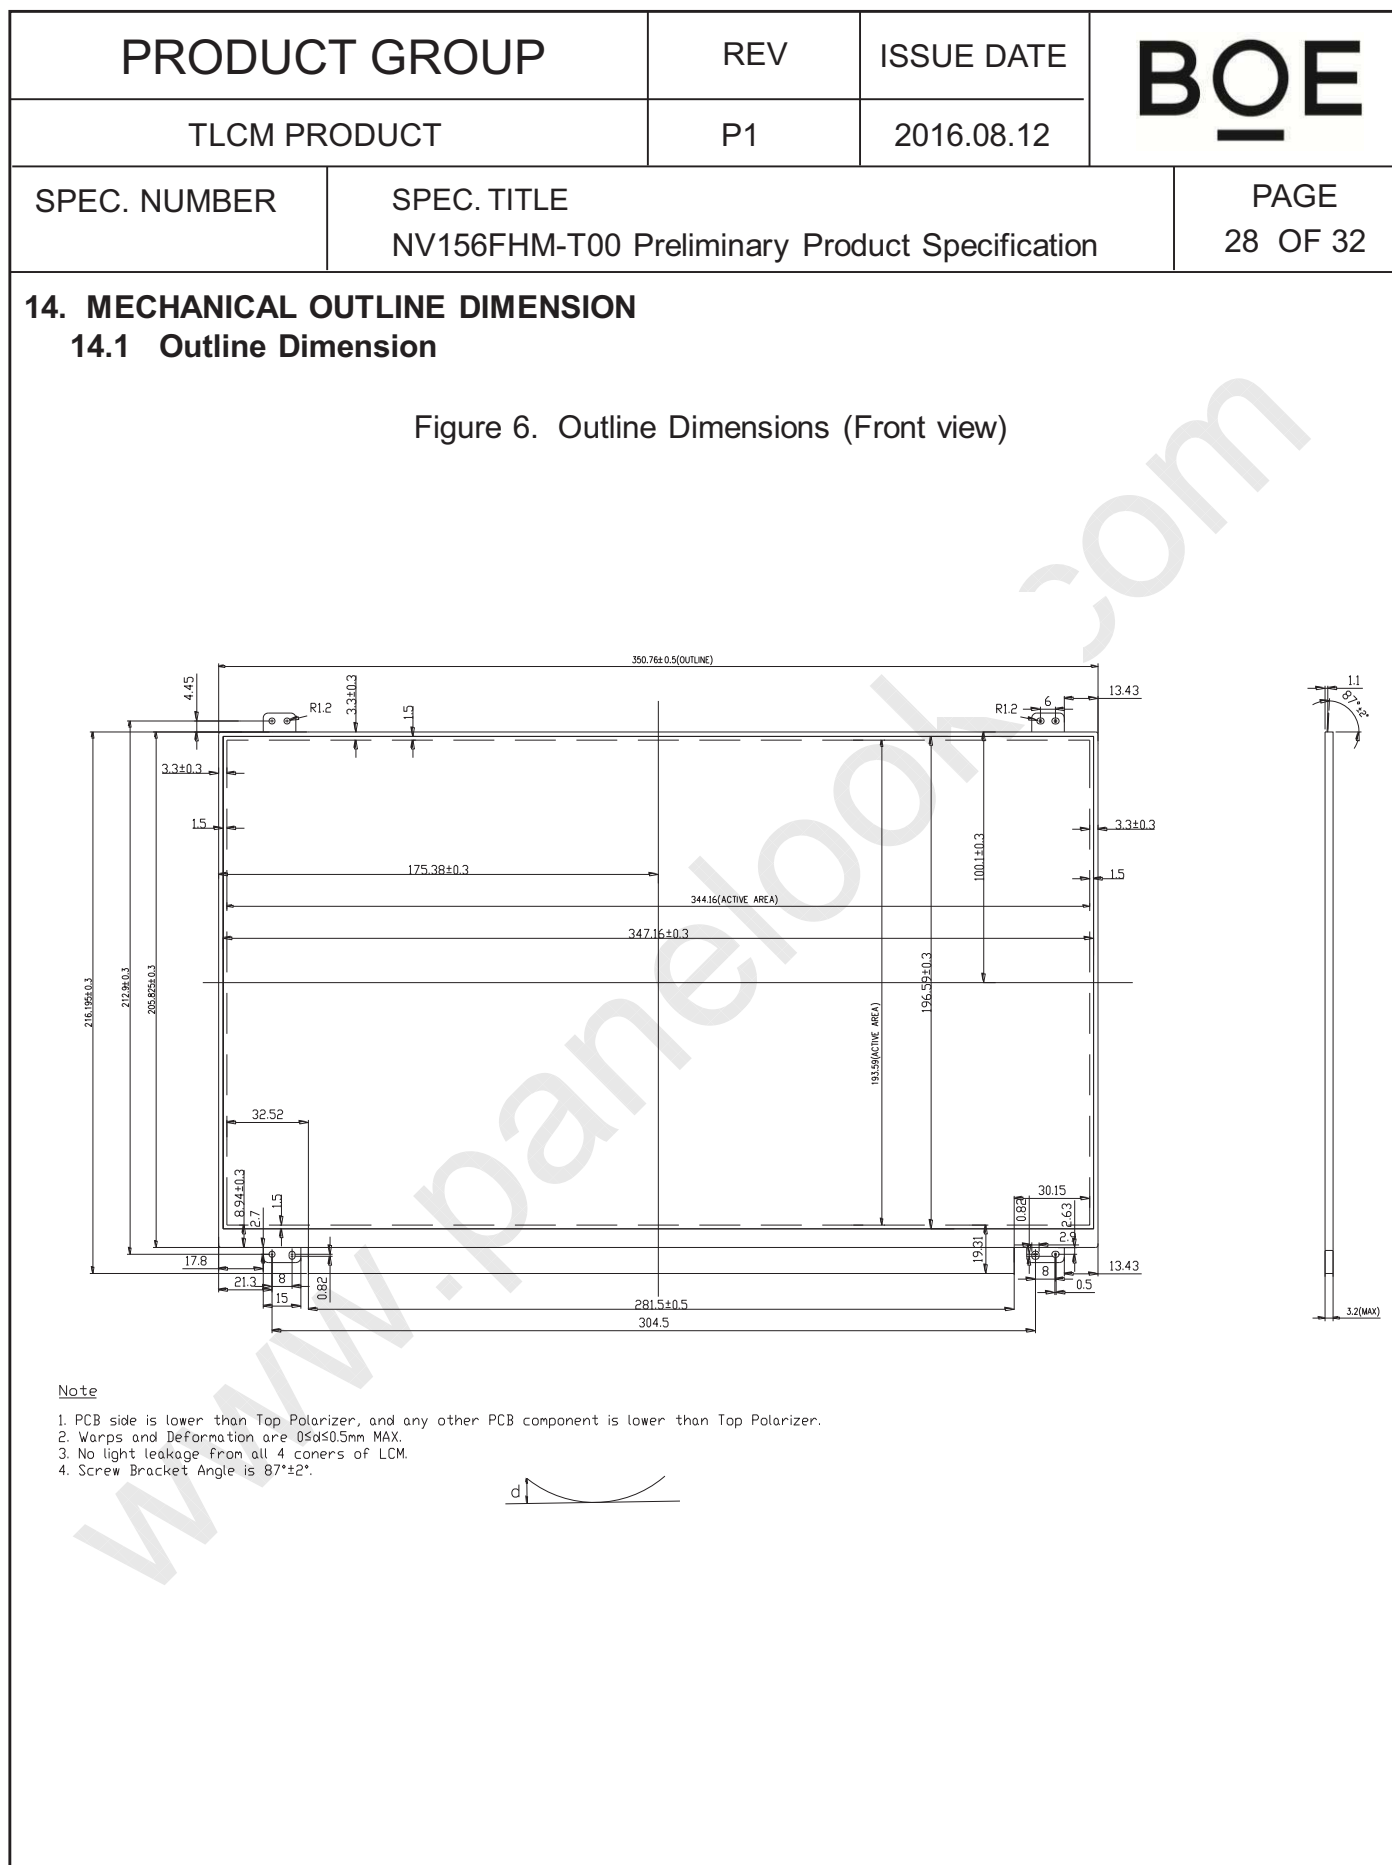

R2013-9024-O(3/3)

A4(210 X 297)

## 14.2 Total Solution Outline Dimension

Figure 7. Outline Dimensions (Rear view)

Technical drawing showing the outline dimensions (Rear view) of a device. The drawing includes a large rectangular frame with rounded corners. Key dimensions are labeled: 4x16.3, 4x12, 21, 30, 65.17, 111.22, 33.44, 80, 6.37, 25, 5.5±1, 110.21±1, and 30. A label is shown with the text 'NT156FHM-XXX', a barcode, and 'MDL Label'. A small component is labeled 'PIN'.

A4(210 X 297)



PRODUCT GROUP		REV	ISSUE DATE	<b>BOE</b>
TLCM PRODUCT		P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE NV156FHM-T00 Preliminary Product Specification			PAGE 30 OF 32

## 15.0 EDID Table

Address s (HEX)	Function	Hex	Dec	crc	Input values.	Notes
00	Header	00	0		0	EDID Header
01		FF	255		255	
02		FF	255		255	
03		FF	255		255	
04		FF	255		255	
05		FF	255		255	
06		FF	255		255	
07		00	0		0	
08	ID Manufacturer Name	09	9		BOE	ID = BOE
09		E5	229			
0A	ID Product Code	DD	221		1757	ID = 1757
0B		06	6			
0C	32-bit serial No.	00	0			
0D		00	0			
0E		00	0			
0F		00	0			
10	Week of manufacture	01	1		1	
11	Year of Manufacture	1A	26		2016	Manufactured in 2016
12	EDID Structure Ver.	01	1		1	EDID Ver 1.0
13	EDID revision #	04	4		4	EDID Rev. 0.4
14	Video input definition	95	149		-	digital signal/DP input
15	Max H image size	22	34		34	34 cm (Approx)
16	Max V image size	13	19		19	19 cm (Approx)
17	Display Gamma	78	120		2.2	Gamma curve = 2.2
18	Feature support	02	2			RGB display, Preferred Timming mode/RGB 4:4:4
19	Red/Green low bits	C9	201		-	Red / Green Low Bits
1A	Blue/White low bits	A0	160		-	Blue / White Low Bits
1B	Red x high bits	95	149	599	0.585	Red (x) = 10010101 (0.585)
1C	Red y high bits	5D	93	372	0.364	Red (y) = 01011101 (0.364)
1D	Green x high bits	59	89	358	0.350	Green (x) = 01011001 (0.35)
1E	Green y high bits	94	148	593	0.580	Green (y) = 10010100 (0.58)
1F	Blue x high bits	29	41	166	0.163	Blue (x) = 00101001 (0.163)
20	BLue y high bits	24	36	146	0.143	Blue (y) = 00100100 (0.143)
21	White x high bits	50	80	320	0.313	White (x) = 01010000 (0.313)
22	White y high bits	54	84	336	0.329	White (y) = 01010100 (0.329)
23	Established timing 1	00	0		-	
24	Established timing 2	00	0		-	



PRODUCT GROUP				REV	ISSUE DATE	BOE
TLCM PRODUCT				P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE					PAGE
	NV156FHM-T00 Preliminary Product Specification					31 OF 32
25	Established timing 3	00	0		-	Not Used
26	Standard timing #1	01	1			
27		01	1			
28	Standard timing #2	01	1			Not Used
29		01	1			
2A	Standard timing #3	01	1			Not Used
2B		01	1			
2C	Standard timing #4	01	1			Not Used
2D		01	1			
2E	Standard timing #5	01	1			Not Used
2F		01	1			
30	Standard timing #6	01	1			Not Used
31		01	1			
32	Standard timing #7	01	1			Not Used
33		01	1			
34	Standard timing #8	01	1			Not Used
35		01	1			
36	Detailed timing/monitor descriptor #1	9C	156		152.6	152.6MHz Main clock
37		3B	59			
38		80	128		1920	Hor Active = 1920
39		36	54		310	Hor Blanking = 310
3A		71	113		-	4 bits of Hor. Active + 4 bits of Hor. Blanking
3B		38	56		1080	Ver Active = 1080
3C		3C	60		60	Ver Blanking = 60
3D		40	64		-	4 bits of Ver. Active + 4 bits of Ver. Blanking
3E		30	48		48	Hor Sync Offset = 48
3F		20	32		32	H Sync Pulse Width = 32
40		36	54		3	V sync Offset = 3 line
41		00	0		6	V Sync Pulse width : 6 line
42		58	88		344	Horizontal Image Size = 344 mm (Low 8 bits)
43		C2	194		194	Vertical Image Size = 194 mm (Low 8 bits)
44		10	16		-	4 bits of Hor Image Size + 4 bits of Ver Image Size
45		00	0		0	Hor Border (pixels)
46		00	0		0	Vertical Border (Lines)
47		1A	26			Refer to right table

R2013-9024-O(3/3)

A4(210 X 297)





PRODUCT GROUP				REV	ISSUE DATE	BOE
TLCM PRODUCT				P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE					PAGE
	NV156FHM-T00 Preliminary Product Specification					32 OF 32
48	Detailed timing/monitor descriptor #2	FA	250		117.7	117.7MHz Main clock
49		2D	45			
4A		80	128		1920	Hor Active = 1920
4B		0E	14		270	Hor Blanking = 270
4C		71	113		-	4 bits of Hor. Active + 4 bits of Hor. Blanking
4D		38	56		1080	Ver Active = 1080
4E		28	40		40	Ver Blanking = 40
4F		40	64		-	4 bits of Ver. Active + 4 bits of Ver. Blanking
50		30	48		48	Hor Sync Offset = 48
51		20	32		32	H Sync Pulse Width = 32
52		36	54		3	V sync Offset = 3 line
53		00	0		6	V Sync Pulse width : 6 line
54		58	88		344	Horizontal Image Size = 344 mm (Low 8 bits)
55		C2	194		194	Vertical Image Size = 194 mm (Low 8 bits)
56		10	16		-	4 bits of Hor Image Size + 4 bits of Ver Image Size
57		00	0		0	Hor Border (pixels)
58		00	0		0	Vertical Border (Lines)
59		1A	26		0	
5A	Detailed timing/monitor descriptor #3	00	0		ASCII Data Sting Tag	
5B		00	0			
5C		00	0			
5D		FE	254			
5E		00	0			
5F		42	66		B	Manufacture name : BOECQ
60		4F	79		O	
61		45	69		E	
62		20	32			
63		43	67		C	
64		51	81		Q	
65		0A	10			
66		20	32			
67		20	32			
68		20	32			
69		20	32			
6A		20	32			
6B		20	32			

R2013-9024-O(3/3)

A4(210 X 297)





PRODUCT GROUP				REV	ISSUE DATE	BOE
TLCM PRODUCT				P1	2016.08.12	
SPEC. NUMBER	SPEC. TITLE					PAGE
	NV156FHM-T00 Preliminary Product Specification					33 OF 32
6C	Detailed timing/monitor descriptor #4	00	0			Product Name Tag (ASCII)
6D		00	0			
6E		00	0			
6F		FE	254			
70		00	0			
71		4E	78		N	Model name : NV156FHM-T00
72		56	86		V	
73		31	49		1	
74		35	53		5	
75		36	54		6	
76		46	70		F	
77		48	72		H	
78		4D	77		M	
79		2D	45		-	
7A		54	84		T	
7B		30	48		0	
7C		30	48		0	
7D		0A	10			
7E	Extension flag	00	0			
7F	Checksum	26	38	38	-	