

**PROPRIETARY NOTE**

THIS SPECIFICATION IS THE PROPERTY OF BOE AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOE AND MUST BE RETURNED TO BOE UPON ITS REQUEST

TITLE : NV156FHM-N63 V8.0**Product Specification****Rev. P4****BOE Optoelectronics Technology Co., Ltd**

SPEC. NUMBER	PRODUCT GROUP	Rev.	ISSUE DATE	PAGE
B2014-Q011-O (1/3)	TFT-LCD	P3	2018.08.02	1 OF 34

A4(210 X 297)



BOE	PRODUCT GROUP		REV	ISSUE DATE
	Customer Spec		Rev. P3	2018.08.02
REVISION HISTORY				
(√) Preliminary Specification () Final Specification				
Revision No.	Page	Description of Changes	Date	Prepared
P0	-	Initial Release	2018.04.24	Li Lu
P1	-	Modify Circuit, Mechanical, and Packing	2018.06.04	Li Lu
P2	-	Modify Mechanical Outline Drawing	20180622	Chen Wei
P3		Modify LCM Label Size and Location	20180802	Chen Wei
P4		Modify LCM Label Size and Location	20180820	Chen Wei
REVIEWED				
Designer		Manager		
Zhang Yuanbo(Array)		Wang Rui		
Pan Ruiqi(Cell)		Hu Jingyong		
Pang Jiaqi(CF)		Li Min		
Sun Hao(EE)		Fu Siqing		
Chen Wei(MO)		Luo Wencheng		
Qi Tian(QE)		Huang Yuan		
Wang Guang(PI)		Wang Zhihui		
APPROVED				
Li Lu(PM)				
SPEC. NUMBER	SPEC. TITLE			PAGE
B2014-Q011-O (2/3)	NV156FHM-N63 V8.0 Product Specification Rev. P3			2 OF 34
			A4(210 X 297)	

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P3

2018.08.02

Contents

No.	Items	Page
1.0	General Description	4
2.0	Absolute Maximum Ratings	6
3.0	Electrical Specifications	7
4.0	Optical Specifications	10
5.0	Interface Connection	15
6.0	Signal Timing Specification	19
7.0	Input Signals, Display Colors & Gray Scale of Colors	21
8.0	Power Sequence	22
9.0	Connector Description	23
10.0	Mechanical Characteristics	24
11.0	Reliability Test	25
12.0	Handling & Cautions	25
13.0	Label	26
14.0	Packing Information	28
15.0	Mechanical Outline Dimension	29
16.0	EDID Table	31

SPEC. NUMBER

SPEC. TITLE

NV156FHM-N63 V8.0 Product Specification Rev. P2

PAGE

3 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P3	2018.08.02

1.0 GENERAL DESCRIPTION

1.1 Introduction

NV156FHM-N63 V8.0 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 15.6 inch diagonally measured active area with FHD resolutions (1920 horizontal by 1080 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripe and this module can display 262k(6bit) colors and color gamut 72%. The TFT-LCD panel used for this module is a low reflection and higher color type. Therefore, this module is suitable for Notebook PC. The LED driver for back-light driving is built in this model.

All input signals are eDP1.2 interface compatible.

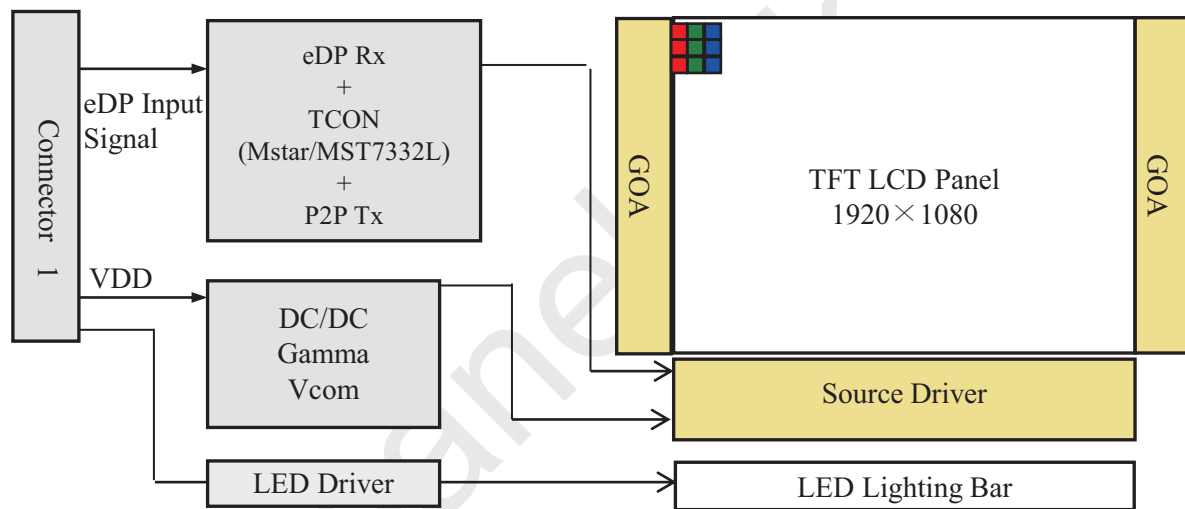


Figure 1. Drive Architecture

1.2 Features

- 2 lane eDP interface with 2.7Gbps link rates
- Thin and light weight
- 262k(6bit) color depth, color gamut 72%
- Single LED lighting bar (Bottom side/Horizontal Direction)
- Data enable signal mode
- Side mounting frame
- Green product (RoHS & Halogen free product)
- On board LED driving circuit
- Low driving voltage and low power consumption
- On board EDID chip

SPEC. NUMBER	SPEC. TITLE	PAGE
	NV156FHM-N63 V8.0 Product Specification Rev. P2	4 OF 34



BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P3	2018.08.02

1.3 Application

- Notebook PC (Wide type)

1.4 General Specification

The followings are general specifications at the model NV156FHM-N63 V8.0. (listed in Table 1)

<Table 1. General Specifications>

Parameter	Specification	Unit	Remarks
Active area	344.16(H) × 193.59(V)	mm	
Number of pixels	1920(H) × 1080 (V)	pixels	
Pixel pitch	0.17925 (H) X 0.17925 (V)	mm	
Pixel arrangement	RGB Vertical stripe		
Display colors	262k(6bit)		
Color gamut	72%		
Display mode	Normally Black		
Dimensional outline	350.46(H)*206.25(V) (W/PCB)*4.6(Max) 350.46(H)*205.15(V) (W/O PCB)*2.6(Max)	mm	
Weight	310(max)	g	
Surface treatment	AG		
Back-light	Bottom edge side, 1-LED lighting bar type		Note 1
Power consumption	P _D : 0.88	W	@Mosaic
	P _{BL} : 3.45	W	
	P _{Total} : 4.33	W	@Mosaic

Notes : 1. LED Lighting Bar (44*LED Array)

SPEC. NUMBER	SPEC. TITLE	PAGE
B2014-Q011-O (3/3)	NV156FHM-N63 V8.0 Product Specification Rev. P2	5 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

BOE

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P3

2018.08.02

2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 2. Absolute Maximum Ratings>

Ta=25+/-2°C

Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	-0.3	4.0	V	Note 1
Logic Supply Voltage	V _{IN}	V _{SS} -0.3	V _{DD} +0.3	V	
Operating Temperature	T _{OP}	0	+50	°C	Note 2
Storage Temperature	T _{ST}	-20	+60	°C	

Notes :

1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions.

2. Temperature and relative humidity range are shown in the figure below.

95 % RH Max. (40 °C ≥ Ta) Maximum wet - bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation.

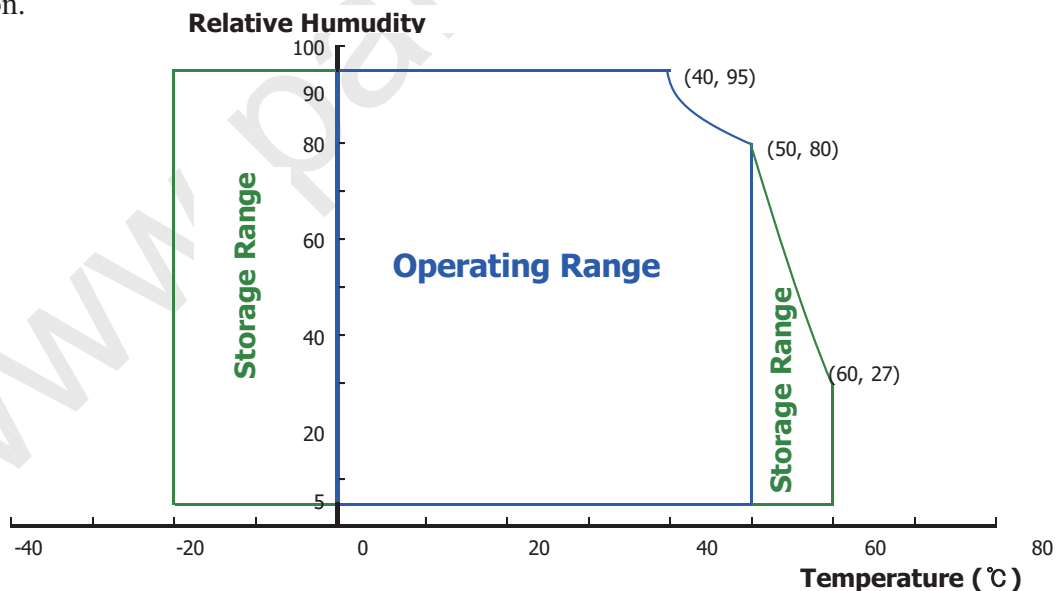


Figure 2. Temperature and Relative Humidity Range

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N63 V8.0 Product Specification Rev. P2

6 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P3	2018.08.02

3.0 ELECTRICAL SPECIFICATIONS

3.1 Electrical Specifications

< Table 3. Electrical Specifications >

Ta=25+/-2°C

Parameter		Min.	Typ.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	3.0	3.3	3.6	V	Note 1
Permissible Input Ripple Voltage	V _{RF}	-10%*V _{DD}	-	10%*V _{DD}	mV	Note4
Power Supply Current	I _{DD}	-	267	485	mA	Note 1
Power Supply Inrush Current	I _{inrush}	-	-	1.5	A	Note3
Power Consumption	P _D	-	0.88	1.6	W	Note 1
	P _{BL}	-	-	3.45	W	Note 2
	P _{total}	-	-	5.05	W	Note 1

Notes :

- The supply voltage is measured and specified at the interface connector of LCM.
The current draw and power consumption specified is for 3.3V at 25 °C.

a) Typ : Mosaic pattern 8*8

b) Max : R/G/B patterns



(a)



(b)

Figure 3. Power Measure Patterns

- Calculated value for reference (V_LED × I_LED)

- Measure condition (Figure 4)

- Input voltage range:3.0~3.6V.Test condition: Oscilloscope bandwidth 20MHz, AC coupling.

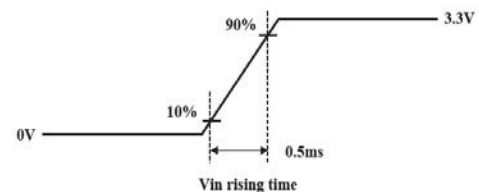


Figure 4. Inrush Measure Condition

SPEC. NUMBER	SPEC. TITLE	PAGE
B2014-Q011-O (3/3)	NV156FHM-N63 V8.0 Product Specification Rev. P2	7 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P3	2018.08.02

3.2 Backlight Unit

< Table 4. LED Driving Guideline Specifications >

Ta=25+/-2°C

Parameter		Min.	Typ.	Max.	Unit	Remarks
LED Forward Voltage	V _F	-	-	2.9	V	
LED Forward Current	I _F	-	23	-	mA	
LED Power Consumption	P _{LED}	-	-	3.45	W	Note 1
LED Life-Time	N/A	15,000	-	-	Hour	I _F = 23mA
Power Supply Voltage for LED Driver	V _{LED}	5	12	21	V	
Power Supply Voltage for LED Driver Inrush	I _{led} inrush	-	-	1.5	A	Note 4
EN Control Level	Backlight On	2.2	-	3.6	V	
	Backlight Off	0	-	0.6	V	
PWM Control Level	High Level	2.2	-	3.6	V	
	Low Level	0	-	0.6	V	
PWM Control Frequency	F _{PWM}	200	-	10,000	Hz	
Duty Ratio		5	-	100	%	Note 3

Notes :

1. Power supply voltage 12V for LED driver.

Calculator value for reference $I_F \times V_F \times 44 / \text{driver efficiency} = P_{LED}$

2. The LED life-time define as the estimated time to 50% degradation of initial luminous.

3. 5% duty cycle is achievable with a dimming frequency less than 1KHz.

4. Measure condition (Figure 5)

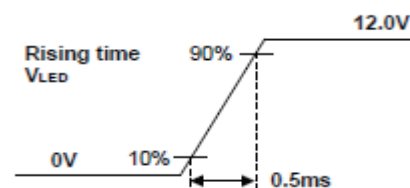


Figure 5. Inrush Measure Condition

SPEC. NUMBER	SPEC. TITLE	PAGE
	NV156FHM-N63 V8.0 Product Specification Rev. P2	8 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

BOE

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P3

2018.08.02

3.3 LED Structure

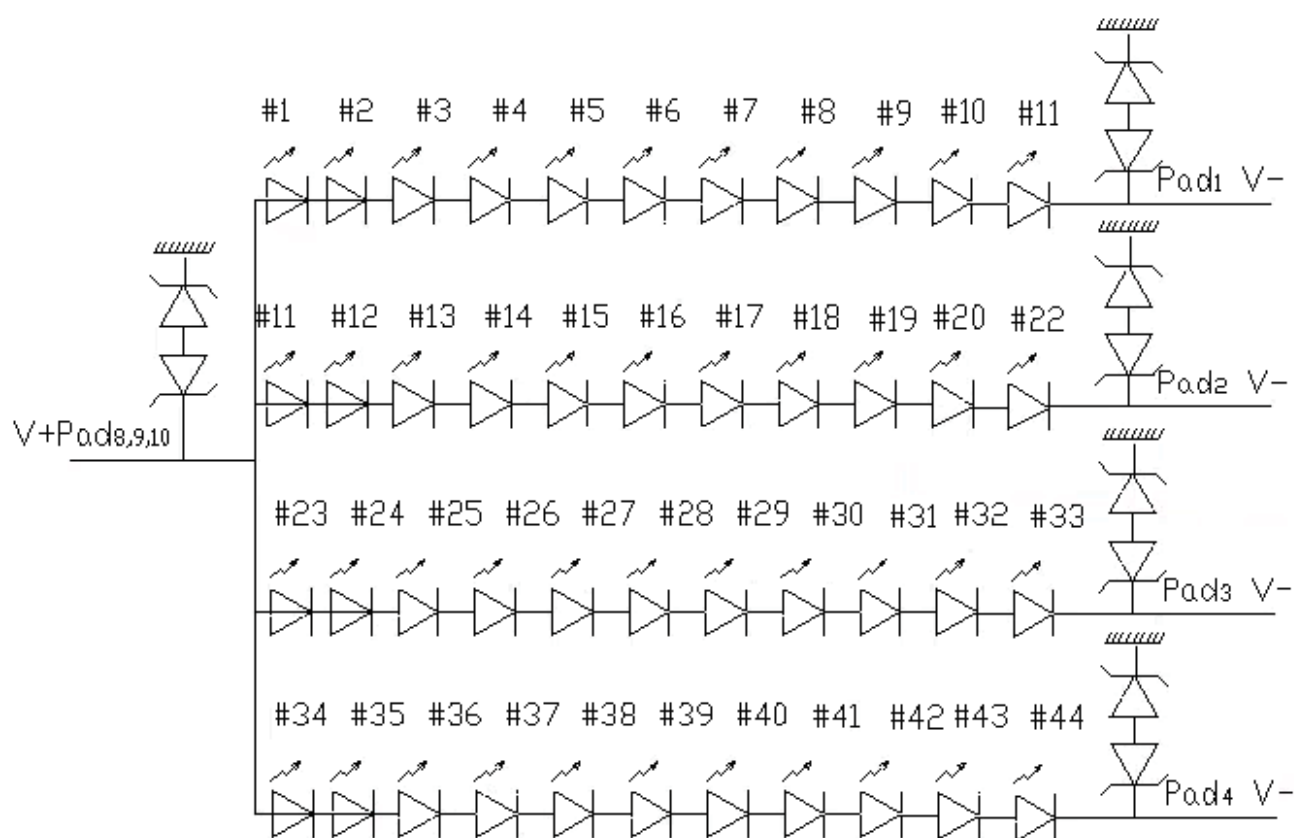


Figure 6. LED Structure

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N63 V8.0 Product Specification Rev. P2

9 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P3	2018.08.02

4.0 OPTICAL SPECIFICATION

4.1 Overview

The test of optical specifications shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = $25 \pm 2^\circ\text{C}$) with the equipment of luminance meter system (PR730&PR810) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and Φ equal to 0° . We refer to $\theta\Phi=0$ ($=\theta 3$) as the 3 o'clock direction (the "right"), $\theta\Phi=90$ ($=\theta 12$) as the 12 o'clock direction ("upward"), $\theta\Phi=180$ ($=\theta 9$) as the 9 o'clock direction ("left") and $\theta\Phi=270$ ($=\theta 6$) as the 6 o'clock direction ("bottom"). While scanning θ and/or Φ , the center of the measuring spot on the display surface shall stay fixed. The backlight should be operating for 30 minutes prior to measurement. VDD shall be $3.3 \pm 0.3\text{V}$ at 25°C . Optimum viewing angle direction is 6 'clock.

4.2 Optical Specifications

<Table 5. Optical Specifications>


Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing Angle Range	Horizontal	Θ_3	CR > 10	80	85	-	Deg.	Note 1
		Θ_9		80	85	-	Deg.	
	Vertical	Θ_{12}		80	85	-	Deg.	
		Θ_6		80	85	-	Deg.	
Luminance Contrast Ratio		CR	$\Theta = 0^\circ$	600	800	-		Note 2
Luminance of White	5 Points	Y_w	$\Theta = 0^\circ$ ILED = 23mA	255	300	-	cd/m ²	Note 3
White Luminance Uniformity	5 Points	$\Delta Y5$		80	-	-		Note 4
	13 Points	$\Delta Y13$		65	-	-		
White Chromaticity		W_x	$\Theta = 0^\circ$	0.283	0.313	0.343		Note 5
		W_y		0.299	0.329	0.359		
Reproduction of Color	Red	R_x	$\Theta = 0^\circ$	-0.03	0.650	+0.03		
		R_y			0.344			
	Green	G_x			0.335			
		G_y			0.617			
	Blue	B_x			0.151			
		B_y			0.061			
Color Gamut				68	72	-	%	
Response Time (Rising + Falling)		T _{RT}	Ta= 25°C $\Theta = 0^\circ$	-	30	35	ms	Note 6
Cross Talk		CT	$\Theta = 0^\circ$	-	-	2.0	%	Note 7

SPEC. NUMBER	SPEC. TITLE	PAGE
	NV156FHM-N63 V8.0 Product Specification Rev. P2	10 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)




	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P3	2018.08.02
<p>Notes :</p> <ol style="list-style-type: none">Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see Figure 7).Contrast measurements shall be made at viewing angle of $\Theta = 0$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state . (see Figure 7) Luminance Contrast Ratio (CR) is defined mathematically.$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$Center Luminance of white is defined as luminance values of 5 point average across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in Figure 8 for a total of the measurements per display.The White luminance uniformity on LCD surface is then expressed as : $\Delta Y = \text{Minimum Luminance of 5(or 13) points} / \text{Maximum Luminance of 5(or 13) points.}$(see Figure 8 and Figure 9).The color chromaticity coordinates specified in Table 5 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.The electro-optical response time measurements shall be made as Figure 10 by switching the “data” input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is T_r, and 90% to 10% is T_r.Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (YA) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (YB) of that same area when any adjacent area is driven dark. (See Figure 11).			
SPEC. NUMBER	SPEC. TITLE	PAGE	
B2014-Q011-O (3/3)	NV156FHM-N63 V8.0 Product Specification Rev. P2	11 OF 34	

B2014-Q011-O (3/3)

A4(210 X 297)

BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P3	2018.08.02

4.3 Optical Measurements

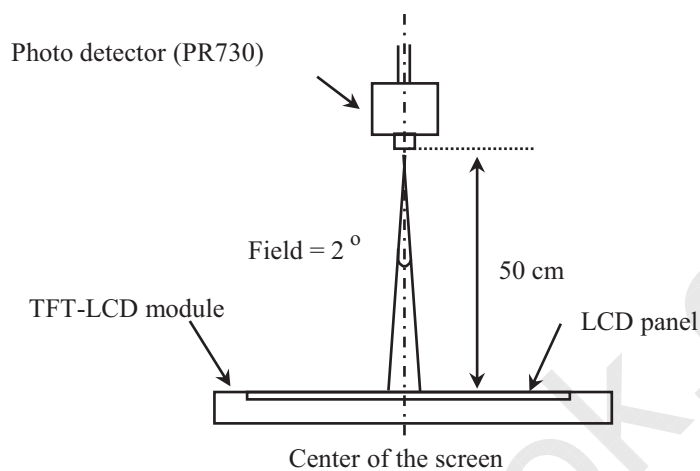

Optical characteristics measurement setup

Figure 7. Measurement Set Up

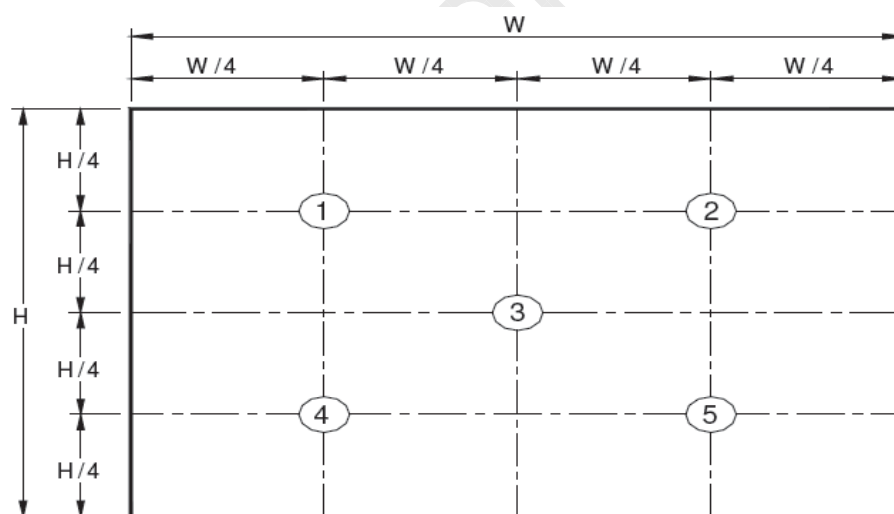


Figure 8. White Luminance and Uniformity Measurement Locations (5 points)

Center Luminance of white is defined as luminance values of center 5 points across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in Figure 7 for a total of the measurements per display.

SPEC. NUMBER	SPEC. TITLE	PAGE
	NV156FHM-N63 V8.0 Product Specification Rev. P2	12 OF 34

BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P3	2018.08.02

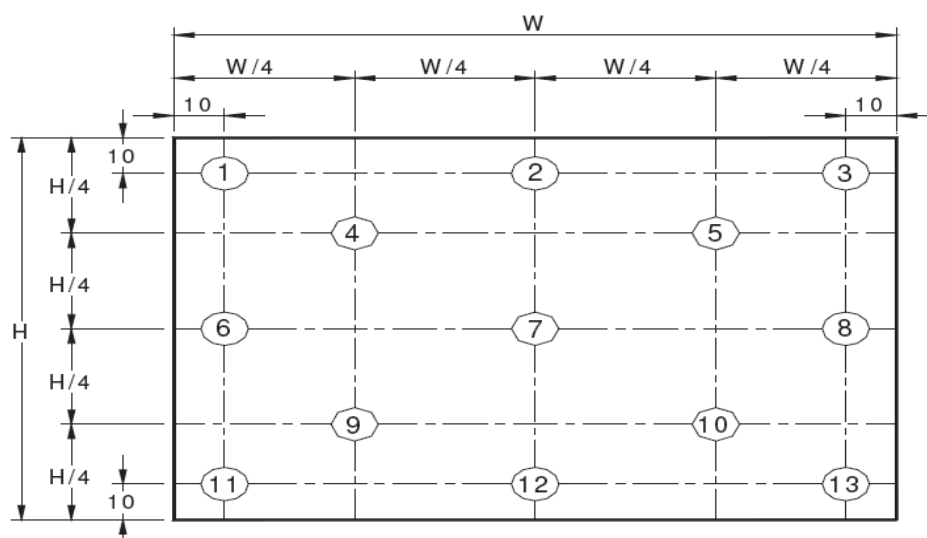


Figure 9. Uniformity Measurement Locations (13 points)

The White luminance uniformity on LCD surface is then expressed as : $\Delta Y5$ = Minimum Luminance of five points / Maximum Luminance of five points (see Figure 8) , $\Delta Y13$ = Minimum Luminance of 13 points /Maximum Luminance of 13 points (see Figure 9).

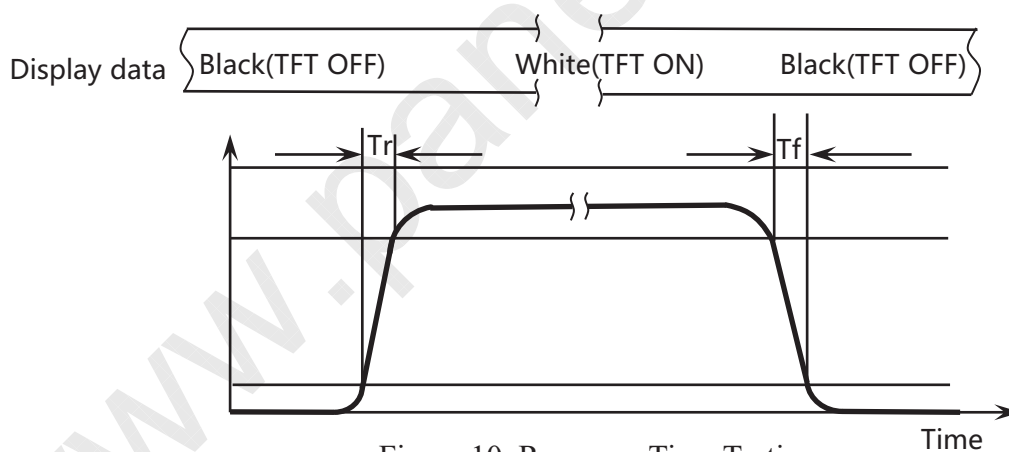



Figure 10. Response Time Testing

The electro-optical response time measurements shall be made as shown in Figure 10 by switching the “data” input signal ON and OFF. T_r : The luminance to change from 90% to 10% , T_f : The luminance to change from 10% to 90% .

The test system : PR810

SPEC. NUMBER	SPEC. TITLE	PAGE
	NV156FHM-N63 V8.0 Product Specification Rev. P2	13 OF 34

BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P3	2018.08.02

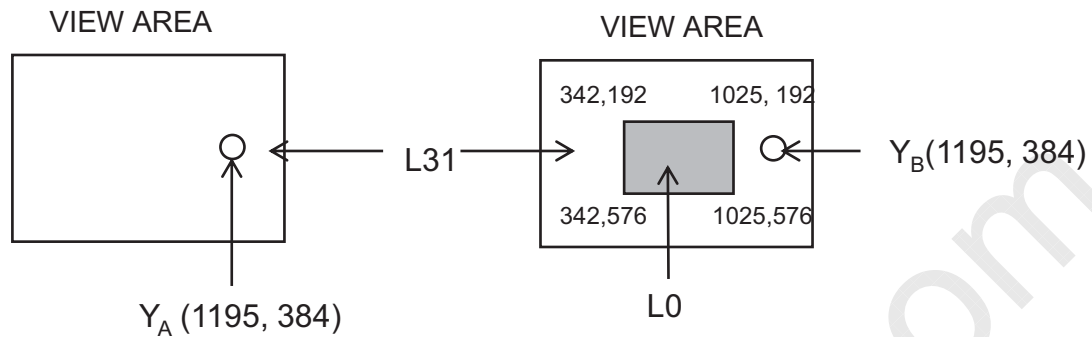

$$\text{Cross-Talk (\%)} = \left| \frac{Y_B - Y_A}{Y_A} \right| \times 100$$

Figure 11. Cross Talk Modulation Test Description

Where:

Y_A = Initial luminance of measured area (cd/m²)

Y_B = Subsequent luminance of measured area (cd/m²)

The location measured will be exactly the same in both patterns

Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (Y_A) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (Y_B) of that same area when any adjacent area is driven dark Refer to Figure 11)

The test system: PR730

SPEC. NUMBER	SPEC. TITLE	PAGE
B2014-Q011-O (3/3)	NV156FHM-N63 V8.0 Product Specification Rev. P2	14 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P3

2018.08.02

5.0 INTERFACE CONNECTION

5.1 Electrical Interface Connection

The electronics interface connector is IPEX 20455-030E-66.

The connector interface pin assignments are listed in Table 6.

<Table 6. Pin Assignments for the Interface Connector>

Terminal	Symbol	Functions
Pin No.	Symbol	Description
1	NC	No Connection
2	H_GND	Ground
3	LANE1_N	eDP RX channel 1 negative
4	LANE1_P	eDP RX channel 1 positive
5	H_GND	Ground
6	LANE0_N	eDP RX channel 0 negative
7	LANE0_P	eDP RX channel 0 positive
8	H_GND	Ground
9	AUX_CH_P	eDP AUX CH positive
10	AUX_CH_N	eDP AUX CH negative
11	H_GND	Ground
12	LCD_VCC	Power Supply, 3.3V (typ.)
13	LCD_VCC	Power Supply, 3.3V (typ.)
14	NC	No Connection
15	H_GND	Ground
16	H_GND	Ground
17	HPD	Hot plug detect output
18	BL_GND	LED Ground
19	BL_GND	LED Ground
20	BL_GND	LED Ground
21	BL_GND	LED Ground
22	BL_ENABLE	LED enable pin(+3.3V Input)
23	BL_PWM	System PWM Signal Input
24	NC	No Connection
25	NC	No Connection
26	BL_POWER	LED Power Supply 5V-21V
27	BL_POWER	LED Power Supply 5V-21V
28	BL_POWER	LED Power Supply 5V-21V
29	BL_POWER	LED Power Supply 5V-21V
30	NC	No Connection

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N63 V8.0 Product Specification Rev. P2

15 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

BOE

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P3

2018.08.02

5.2 eDP Interface

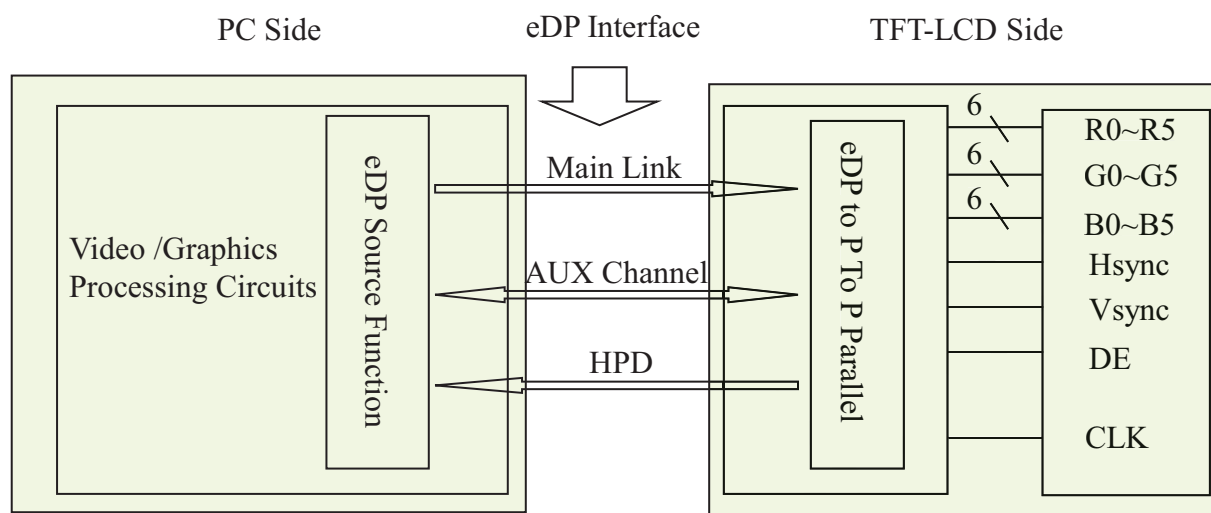


Figure 12. eDP Interface Architecture

Note:

Transmitter : Parade DP501 or equivalent.

Transmitter is not contained in module.

SPEC. NUMBER

SPEC. TITLE

NV156FHM-N63 V8.0 Product Specification Rev. P2

PAGE

16 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P3

2018.08.02

5.3 Data Input Format

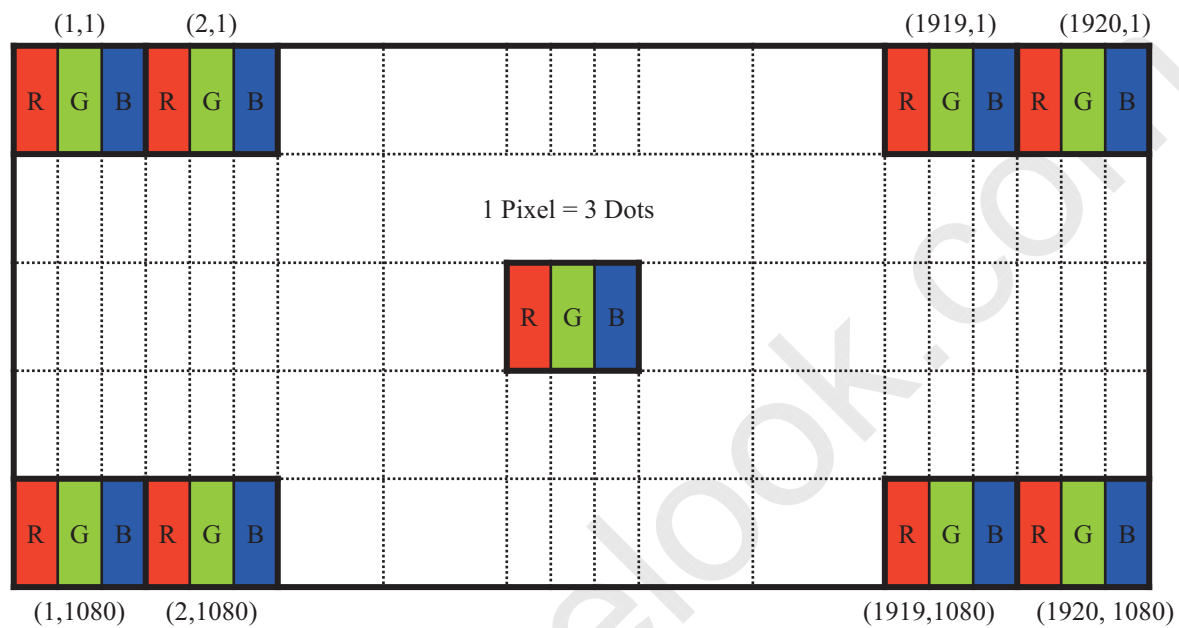


Figure 13. Display Position of Input Data (V-H)

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N63 V8.0 Product Specification Rev. P2

17 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P3

2018.08.02

5.5 Back-light & LCM Interface Connection

BLU Interface Connector: STM MSK24022P10D or Compatible.

<Table 7. Pin Assignments for the BLU Connector>

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	LED	LED cathode connection	6	GND	LED Ground
2	LED	LED cathode connection	7	NC	No Connection
3	LED	LED cathode connection	8	Vout	LED anode connection
4	LED	LED cathode connection	9	Vout	LED anode connection
5	NC	No Connection	10	Vout	LED anode connection

SPEC. NUMBER

SPEC. TITLE

NV156FHM-N63 V8.0 Product Specification Rev. P2

PAGE

18 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P3

2018.08.02

6.0 SIGNAL TIMING SPECIFICATION

6.1 The NV156FHM-N63 V8.0 Is Operated By The DE Only

< Table 8. Signal Timing Specification >

Item		Symbols	Min	Typ	Max	Unit
Clock	Frequency	1/Tc	145.2	152.5	162.8	MHz
Frame Period		Tv	1100	1140	1180	lines
			-	60	-	Hz
			-	16.67	-	ms
Vertical Display Period		Tvd	-	1080	-	lines
One line Scanning Period		Th	2200	2230	2300	clocks
Horizontal Display Period		Thd	-	1920	-	clocks

Note : The above is as optimized setting.

SPEC. NUMBER

SPEC. TITLE

NV156FHM-N63 V8.0 Product Specification Rev. P2

PAGE

19 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P3	2018.08.02

6.2 eDP Rx Interface Timing Parameter

The specification of the eDP Rx interface timing parameter is shown in Table 9.

<Table 9. eDP Main-Link RX TP4 Package Pin Parameters>

Item	Symbol	Min	Typ	Max	Unit	Remark
Spread spectrum clock (Link clock down-spreading)	SSC	0	-	0.5	%	
Differential peak-to-peak input voltage at package pins	VRX-DIFFp-p	100	-	1320	mV	
Rx input DC common mode voltage	VRX_DC_CM	0	-	2	V	
Differential termination resistance	RRX-DIFF	80	-	120	Ω	
Single-ended termination resistance	RRX-SE	40	-	60	Ω	
Rx short circuit current limit	IRX_SHORT	-	-	50	mA	
Intra-pair skew at Rx package pins (RBR) RX intra-pair skew tolerance at RBR	LRX_SKEW_ INTRA_PAIR	-	-	60	ps	

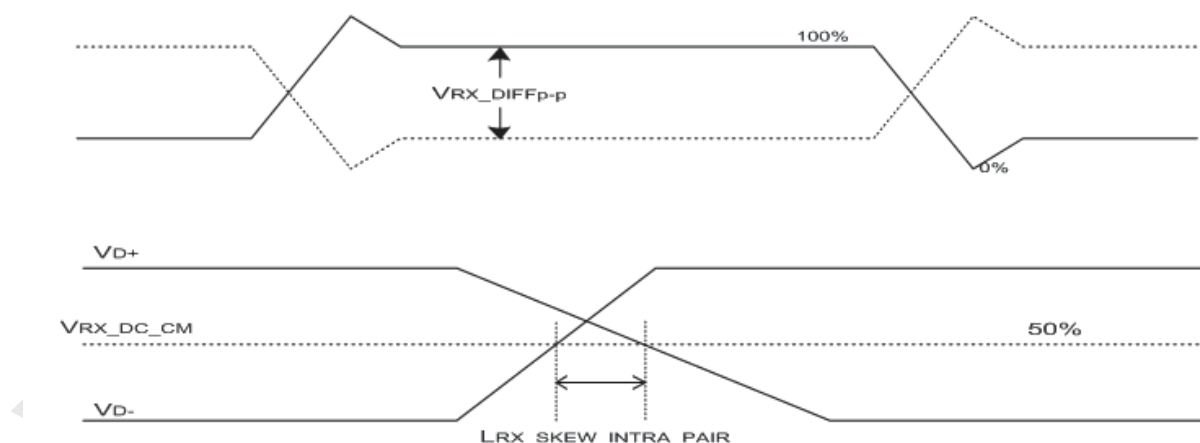


Figure 14. VRX-DIFFp-p & LRX_SKEW_INTRA_PAIR

SPEC. NUMBER	SPEC. TITLE	PAGE
B2014-Q011-O (3/3)	NV156FHM-N63 V8.0 Product Specification Rev. P2	20 OF 34

BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P3	2018.08.02

7.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS

<Table 10. Input Signal & Basic Display Colors & Gray Scale of Colors >

	Colors & Gray scale	Data signal																	
		R0	R1	R2	R3	R4	R5	G0	G1	G2	G3	G4	G5	B0	B1	B2	B3	B4	B5
Basic colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Light Blue	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Purple	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray scale of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Darker	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△ ▽	↑ ↓					↑ ↓					↑ ↓							
	Brighter	1	0	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	▽	0	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
Gray scale of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0
	Darker	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0
	△ ▽	↑ ↓					↑ ↓					↑ ↓							
	Brighter	0	0	0	0	0	0	1	0	1	1	1	1	0	0	0	0	0	0
	▽	0	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
Gray scale of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0
	△ ▽	↑ ↓					↑ ↓					↑ ↓							
	Brighter	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1
	▽	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
Gray scale of White & Black	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	1	0	0	0	0	0	1	0	0	0	0	0	1	0	0	0	0	0
	Darker	0	1	0	0	0	0	0	1	0	0	0	0	0	1	0	0	0	0
	△ ▽	↑ ↓					↑ ↓					↑ ↓							
	Brighter	1	0	1	1	1	1	1	0	1	1	1	1	1	0	1	1	1	1
	▽	0	1	1	1	1	1	0	1	1	1	1	1	0	1	1	1	1	1
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

SPEC. NUMBER	SPEC. TITLE	PAGE
	NV156FHM-N63 V8.0 Product Specification Rev. P2	21 OF 34

BOE

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P3

2018.08.02

8.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below.

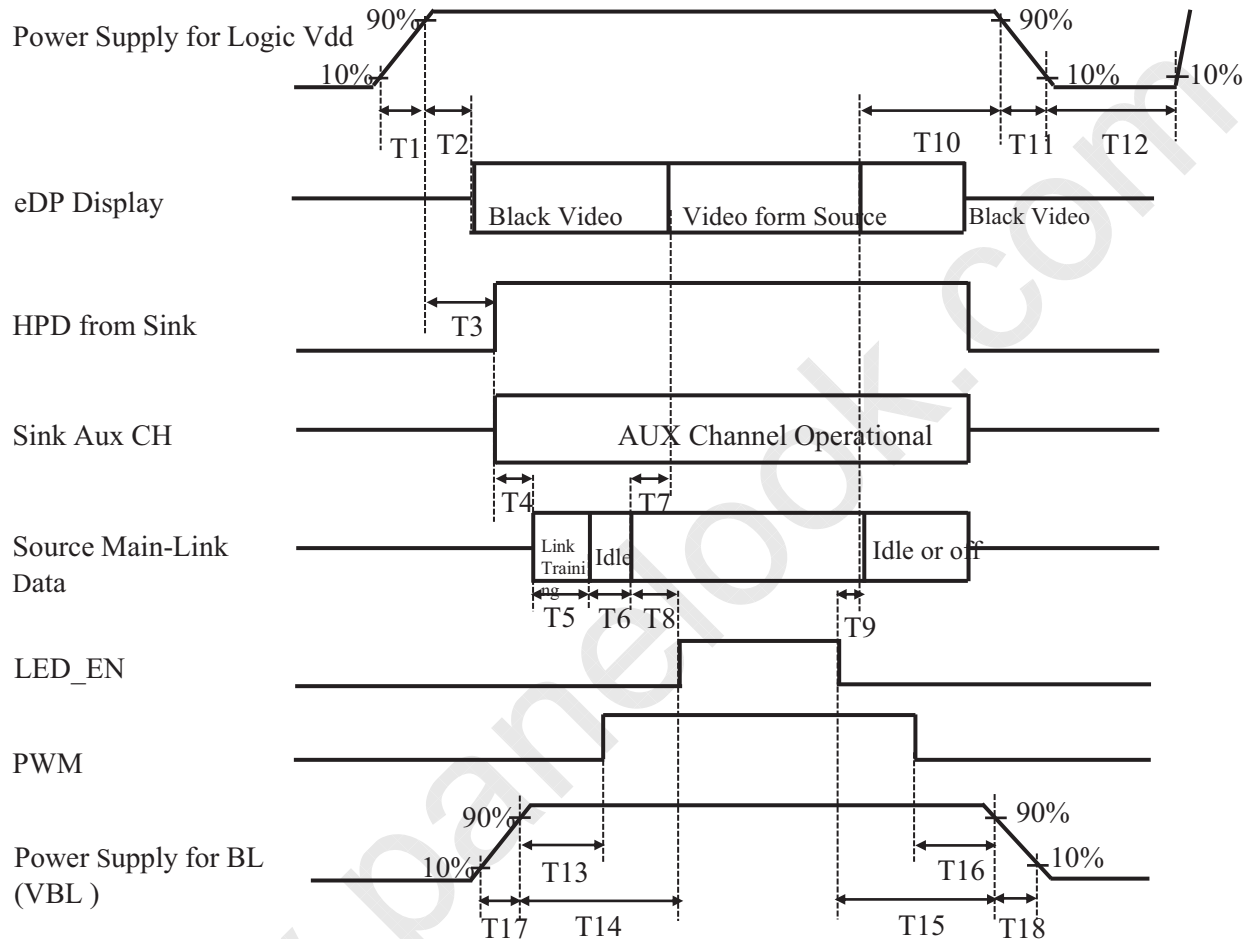


Figure 15. Power Sequence

- $0.5\text{ms} \leq T1 \leq 10\text{ ms}$
- $0\text{ms} < T2 \leq 200\text{ ms}$
- $0\text{ms} < T3 \leq 200\text{ ms}$
- $T3+T4+T5+T6+T8 > 200\text{ms}$
- $0\text{ms} < T7 \leq 50\text{ms}$
- $50\text{ms} < T8$
- $0\text{ms} < T9$
- $0\text{ms} < T10 < 500\text{ ms}$
- $0.5\text{ms} \leq T11 \leq 10\text{ ms}$
- $500\text{ms} \leq T12$
- $0\text{ms} < T13$
- $0\text{ms} < T14$
- $0\text{ms} < T15$
- $0\text{ms} < T16$
- $0.5\text{ms} \leq T17$
- $0.5\text{ms} \leq T18$

Notes:

1. When the power supply VDD is 0V, keep the level of input signals on the low or keep high impedance.
2. Do not keep the interface signal high impedance when power is on. Back Light must be turn on after power for logic and interface signal are valid.

SPEC. NUMBER

SPEC. TITLE

PAGE

NV156FHM-N63 V8.0 Product Specification Rev. P2

22 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)



	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P3	2018.08.02

9.0 Connector Description

Physical interface is described as for the connector on LCM.

These connectors are capable of accommodating the following signals and will be following components.

9.1 TFT LCD Module

< Table 11. Signal Connector >

Connector Name /Description	For Signal Connector
Manufacturer	IPEX
Type/ Part Number	20455-030E-66
Mating Housing/ Part Number	I-PEX 20454-030T

SPEC. NUMBER	SPEC. TITLE	PAGE
B2014-Q011-O (3/3)	NV156FHM-N63 V8.0 Product Specification Rev. P2	23 OF 34

A4(210 X 297)

	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P3	2018.08.02

10.0 MECHANICAL CHARACTERISTICS

10.1 Dimensional Requirements

Figure 21 shows mechanical outlines for the model NV156FHM-N63 V8.0.
Other parameters are shown in Table 12.

<Table 12. Dimensional Parameters>

Parameter	Specification	Unit
Active Area	344.16(H) × 193.59(V)	mm
Number of pixels	1920 (H) X 1080 (V) (1 pixel = R + G + B dots)	pixels
Pixel pitch	0.17925 (H) X 0.17925 (V)	mm
Pixel arrangement	RGB Vertical stripe	
Display colors	262K(6bit)	
Display mode	Normally Black	
Dimensional outline	350.46(H)*206.25(V) (W/PCB)*4.6(Max) 350.46(H)*205.15(V) (W/O PCB)*2.6(Max)	mm
Weight	310 (max)	g

10.2 Mounting

See Figure 21.

10.3 Anti-Glare and Polarizer Hardness.

The surface of the LCD has an Anti-Glare coating to minimize reflection and a coating to reduce scratching.

10.4 Light Leakage

There shall not be visible light from the back-lighting system around the edges of the screen as seen from a distance 50cm from the screen with an overhead light level of 350lux.

SPEC. NUMBER	SPEC. TITLE	PAGE
	NV156FHM-N63 V8.0 Product Specification Rev. P2	24 OF 34

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

Customer Spec

Rev. P3

2018.08.02

11.0 RELIABILITY TEST

The reliability test items and its conditions are shown in below.

<Table 13. Reliability Test>

No	Test Items	Conditions
1	High temperature storage test	Ta = 60°C , 60%RH, 240 hrs
2	Low temperature storage test	Ta = -20°C , 240 hrs
3	High temperature & high humidity operation test	Ta = 50°C , 80%RH, 240 hrs
4	High temperature operation test	Ta = 50°C , 60%RH, 240 hrs
5	Low temperature operation test	Ta = 0°C , 240 hrs
6	Thermal shock	Ta = -20 °C ↔ 60 °C (0.5 hr), 60%±3%RH, 100 cycle
7	Vibration test (non-operating)	Ta = 25°C , 60%RH, 1.5G, 10~500Hz, Sine X,Y,Z / Sweep rate : 1 hour
8	Shock test (non-operating)	Ta = 25°C , 60%RH, 220G, Half Sine Wave 2msec ± X, ± Y, ± Z Once for each direction
9	Electro-static discharge test (operating)	Air : 150 pF, 330Ω, 15 KV Contact : 150 pF, 330Ω, 8 KV Ta = 25°C , 60%RH,

12.0 HANDLING & CAUTIONS

(1) Cautions when taking out the module

- Pick the pouch only, when taking out module from a shipping package.

(2) Cautions for handling the module

- As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
- As the LCD panel and back - light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
- As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
- Do not pull the interface connector in or out while the LCD module is operating.
- Put the module display side down on a flat horizontal plane.
- Handle connectors and cables with care.

(3) Cautions for the operation

- When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
- Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.

SPEC. NUMBER

SPEC. TITLE

NV156FHM-N63 V8.0 Product Specification Rev. P2

PAGE

25 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P3	2018.08.02

(4) Cautions for the atmosphere

- Dew drop atmosphere should be avoided.
- Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.

(5) Cautions for the module characteristics

- Do not apply fixed pattern data signal to the LCD module at product aging.
- Applying fixed pattern for a long time may cause image sticking.

(6) Other cautions

- Do not disassemble and/or re-assemble LCD module.
- Do not re-adjust variable resistor or switch etc.
- When returning the module for repair or etc. Please pack the module not to be broken. We recommend to use the original shipping packages.

13.0 LABEL

(1) Product Label

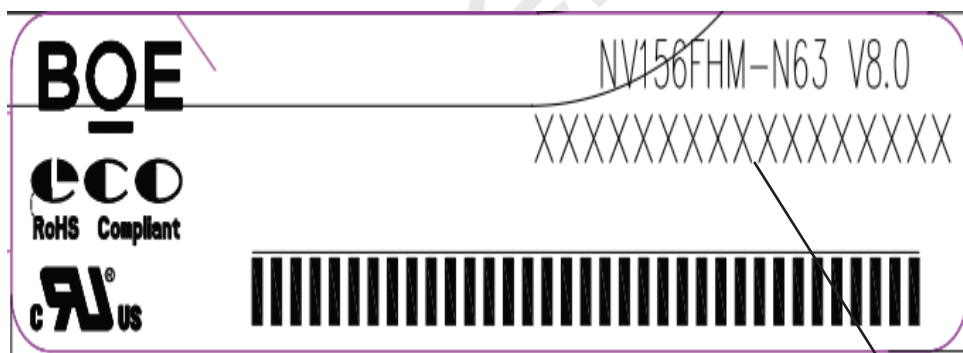


Figure 17. Product Label

Module ID Naming Rule:

<Table 14. Module ID Naming Rule>

Digit Code	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
Code	B	9	A	F	1	7	8	8	D	3	8	0	0	0	0	6	8
Description	Product Name		Product Grade	B8	Year		Month	Model Extension Code (Last 4 Digits of FG CODE)				Serial No. 00001-ZZZZZZ					

SPEC. NUMBER	SPEC. TITLE	PAGE
B2014-Q011-O (3/3)	NV156FHM-N63 V8.0 Product Specification Rev. P2	26 OF 34
		A4(210 X 297)

BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P3	2018.08.02

(2) High voltage caution label

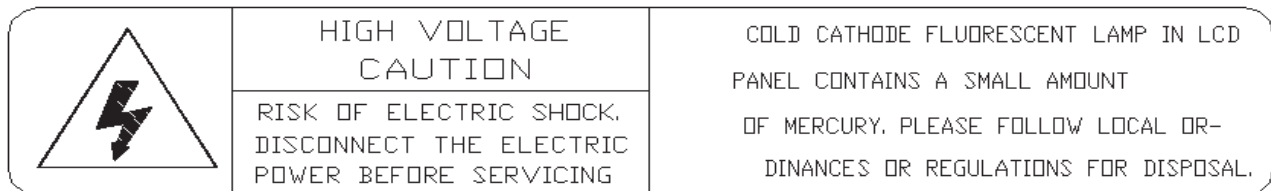


Figure 18. High Voltage Caution Label

(3) Box Label

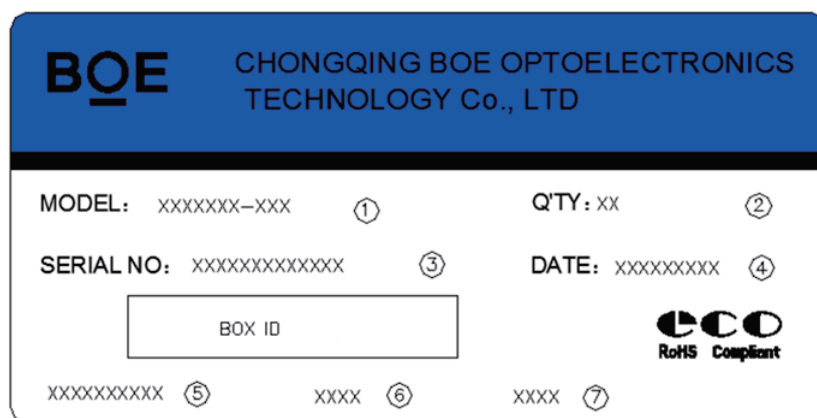


Figure 19. Box Label

Serial number marked part needs to print, show as follows:

1. FG-CODE(Before 12 bit)
2. Product quantity
3. Box ID
4. Date
5. The client section material number(The client)
6. FG-Code After four
7. The supplier code

Total Size:100×50mm

<Table 15. Box Label Naming Rule >

Digit Code	1	2	3	4	5	6	7	8	9	10	11	12	13
Code	B	9	A	F	1	7	8	N	0	0	3	2	7
Description	Product Name		Product Grade	B8	Year		Month	Revision	BOX Serial Number				

SPEC. NUMBER	SPEC. TITLE	PAGE
	NV156FHM-N63 V8.0 Product Specification Rev. P2	27 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P3	2018.08.02

14.0 PACKING INFORMATION

14.1 Packing Order

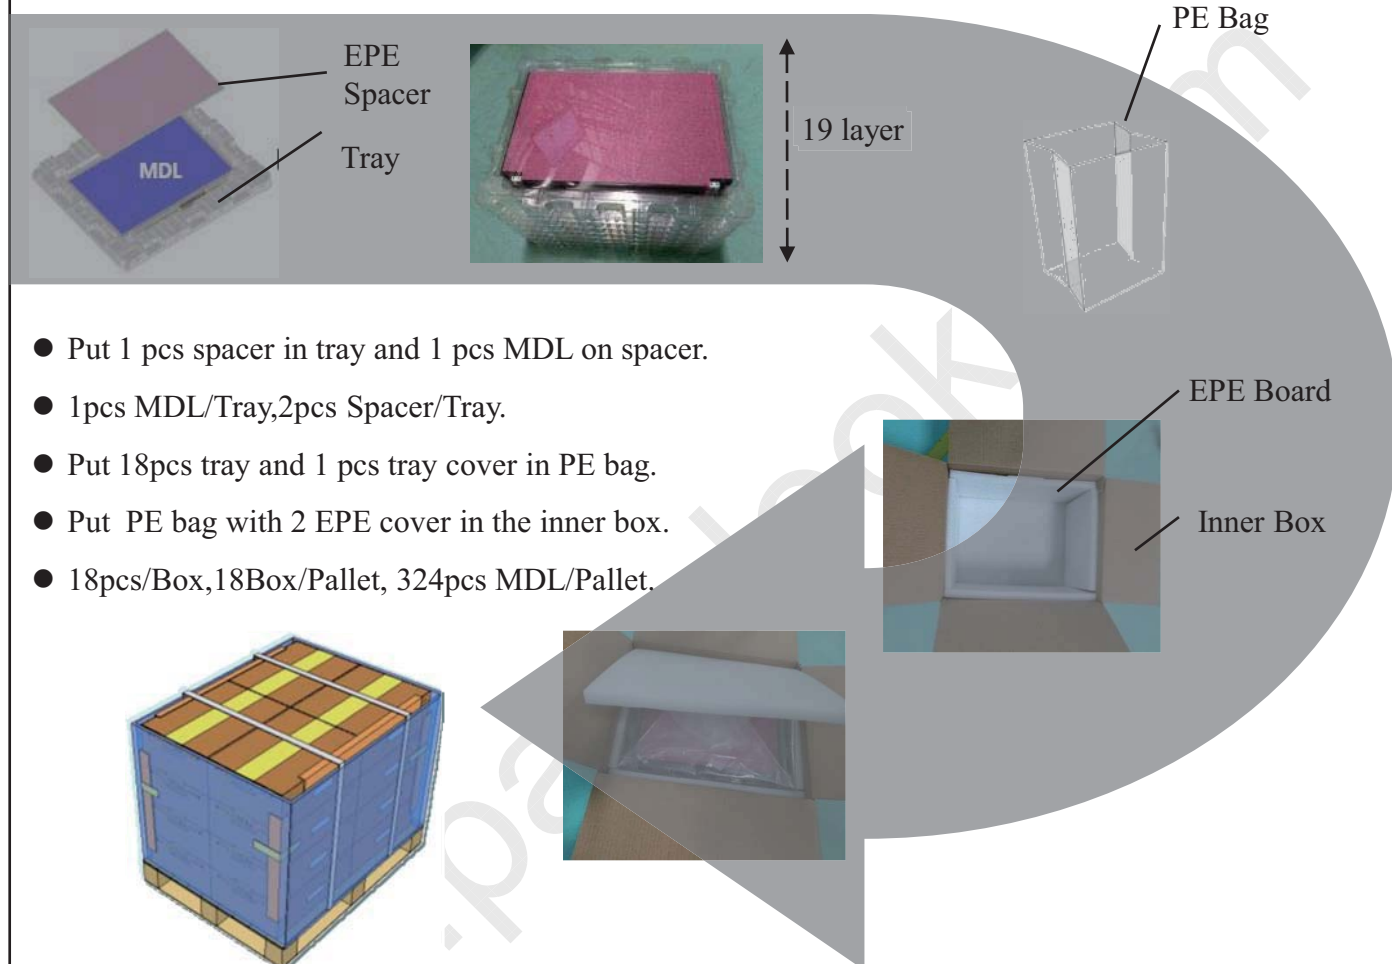


Figure 20. Packing Order

14.2 Note

- Box dimension: 480mm*350mm*285mm
- Package quantity in one box: 18pcs
- Total weight: 11.91kg/Box

SPEC. NUMBER	SPEC. TITLE	PAGE
B2014-Q011-O (3/3)	NV156FHM-N63 V8.0 Product Specification Rev. P2	28 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)

BOE	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P3	2018.08.02

15.0 MECHANICAL OUTLINE DIMENSION

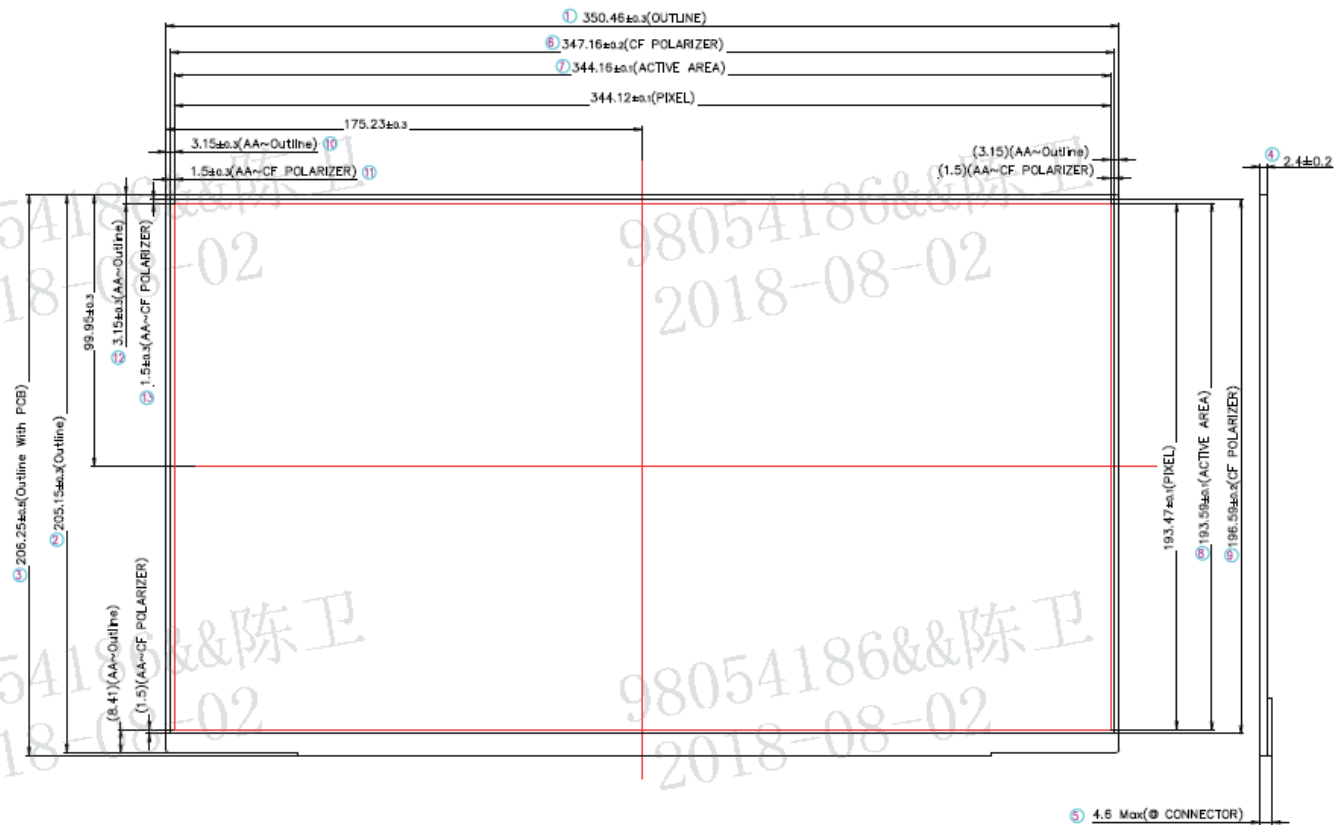


Figure 21. TFT-LCD Module Outline Dimension (Front View)

Note:

1. Top polarizer is the highest position of LCD, and any other component is below the top polarizer.
2. No light leakage from all 4 corners of LCM.
3. General Tolerance: $\pm 0.3\text{mm}$.

SPEC. NUMBER	SPEC. TITLE	PAGE
	NV156FHM-N63 V8.0 Product Specification Rev. P2	29 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)



	PRODUCT GROUP	REV	ISSUE DATE
	Customer Spec	Rev. P3	2018.08.02

16.0 EDID Table

Address (HEX)	Function	Hex	Dec	Input values.	Notes
00	Header	00	0	0	EDID Header
01		FF	255	255	
02		FF	255	255	
03		FF	255	255	
04		FF	255	255	
05		FF	255	255	
06		FF	255	255	
07		00	0	0	
08	ID Manufacturer Name	09	9	BOE	ID = BOE
09		E5	229		
0A	ID Product Code	D8	216	2008	ID = 2008
0B		07	7		
0C	32-bit serial No.	00	0	0	
0D		00	0	0	
0E		00	0	0	
0F		00	0	0	
10	Week of manufacture	01	1	1	
11	Year of Manufacture	1C	28	2018	Manufactured in 2018
12	EDID Structure Ver.	01	1	1	EDID Ver 1.0
13	EDID revision #	04	4	4	EDID Rev. 0.4
14	Video input definition	95	149	-	digital signal/DP input
15	Max H image size	22	34	34	34.4 cm (Approx)
16	Max V image size	13	19	19	19.4 cm (Approx)
17	Display Gamma	78	120	2.2	Gamma curve = 2.2
18	Feature support	02	2	-	RGB display, Preferred Timming mode/RGB 4:4:4
19	Red/Green low bits	4F	79	-	Red / Green Low Bits
1A	Blue/White low bits	A0	160	-	Blue / White Low Bits
1B	Red x high bits	A6	166	0.650	Red (x) = 10100110 (0.65)
1C	Red y high bits	58	88	0.344	Red (y) = 01011000 (0.344)
1D	Green x high bits	55	85	0.335	Green (x) = 01010101 (0.335)
1E	Green y high bits	9E	158	0.617	Green (y) = 10011110 (0.617)
1F	Blue x high bits	26	38	0.151	Blue (x) = 00100110 (0.151)
20	Blue y high bits	0F	15	0.061	Blue (y) = 00001111 (0.061)
21	White x high bits	50	80	0.313	White (x) = 01010000 (0.313)
22	White y high bits	54	84	0.329	White (y) = 01010100 (0.329)
23	Established timing 1	00	0	-	
24	Established timing 2	00	0	-	

SPEC. NUMBER	SPEC. TITLE	PAGE
B2014-Q011-O (3/3)	NV156FHM-N63 V8.0 Product Specification Rev. P2	31 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)



BOE		PRODUCT GROUP			REV	ISSUE DATE	
		Customer Spec			Rev. P3	2018.08.02	
25	Established timing 3	00	0	-			
26	Standard timing #1	01	1		Not Used		
27		01	1				
28	Standard timing #2	01	1		Not Used		
29		01	1				
2A	Standard timing #3	01	1		Not Used		
2B		01	1				
2C	Standard timing #4	01	1		Not Used		
2D		01	1				
2E	Standard timing #5	01	1		Not Used		
2F		01	1				
30	Standard timing #6	01	1		Not Used		
31		01	1				
32	Standard timing #7	01	1		Not Used		
33		01	1				
34	Standard timing #8	01	1		Not Used		
35		01	1				
36	Detailed timing/monitor descriptor #1	95	149	152.5	152.532MHz Main clock		
37		3B	59				
38		80	128	1920	Hor Active = 1920		
39		36	54	310	Hor Blanking = 310		
3A		71	113	-	4 bits of Hor. Active + 4 bits of Hor. Blanking		
3B		38	56	1080	Ver Active = 1080		
3C		3C	60	60	Ver Blanking = 60		
3D		40	64	-	4 bits of Ver. Active + 4 bits of Ver. Blanking		
3E		30	48	48	Hor Sync Offset = 48		
3F		20	32	32	H Sync Pulse Width = 32		
40		36	54	3	V sync Offset = 3 line		
41		00	0	6	V Sync Pulse width : 6 line		
42		58	88	344	Horizontal Image Size = 344 mm (Low 8 bits)		
43		C2	194	194	Vertical Image Size = 194 mm (Low 8 bits)		
44		10	16	-	4 bits of Hor Image Size + 4 bits of Ver Image Size		
45		00	0	0	Hor Border (pixels)		
46		00	0	0	Vertical Border (Lines)		
47		1A	26	-	Refer to right table		
SPEC. NUMBER		SPEC. TITLE				PAGE	
		NV156FHM-N63 V8.0 Product Specification Rev. P2				32 OF 34	
						A4(210 X 297)	

B2014-Q011-O (3/3)

A4(210 X 297)




BOE		PRODUCT GROUP			REV	ISSUE DATE
		Customer Spec			Rev. P3	2018.08.02
48	Detailed timing/monitor descriptor #2	00	0	0.0	0MHz Main clock	
49		00	0			
4A		00	0	0	Hor Active = 0	
4B		00	0	0	Hor Blanking = 0	
4C		00	0	-	4 bits of Hor. Active + 4 bits of Hor. Blanking	
4D		00	0	0	Ver Active = 0	
4E		00	0	0	Ver Blanking = 0	
4F		00	0	-	4 bits of Ver. Active + 4 bits of Ver. Blanking	
50		00	0	0	Hor Sync Offset = 0	
51		00	0	0	H Sync Pulse Width = 0	
52		00	0	0	V sync Offset = 0 line	
53		00	0	0	V Sync Pulse width : 0 line	
54		00	0	0	Horizontal Image Size = 0 mm (Low 8 bits)	
55		00	0	0	Vertical Image Size = 0 mm (Low 8 bits)	
56		00	0	-	4 bits of Hor Image Size + 4 bits of Ver Image Size	
57		00	0	0	Hor Border (pixels)	
58		00	0	0	Vertical Border (Lines)	
59		00	0			
5A	Detailed timing/monitor descriptor #3	00	0	Indicates descriptor #3 is a display Descriptor		
5B		00	0			
5C		00	0			
5D		FE	254		Tag : ASCII String	
5E		00	0		Reserved	
5F		42	66	B	Manufacture name : BOECQ	
60		4F	79	O		
61		45	69	E		
62		20	32			
63		43	67	C		
64		51	81	Q		
65		0A	10			
66		20	32			
67		20	32			
68		20	32			
69		20	32			
6A		20	32			
6B		20	32			

SPEC. NUMBER	SPEC. TITLE	PAGE
	NV156FHM-N63 V8.0 Product Specification Rev. P2	33 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)



		PRODUCT GROUP			REV	ISSUE DATE
		Customer Spec			Rev. P3	2018.08.02
6C	Detailed timing/monitor descriptor #4	00	0		Indicates descriptor #4 is a display Descriptor	
6D		00	0			
6E		00	0		Reserved	
6F		FE	254		Tag : ASCII String	
70		00	0		Reserved	
71		4E	78	N	Model name : NV156FHM-N63	
72		56	86	V		
73		31	49	1		
74		35	53	5		
75		36	54	6		
76		46	70	F		
77		48	72	H		
78		4D	77	M		
79		2D	45	-		
7A		4E	78	N		
7B		36	54	6		
7C		33	51	3		
7D		0A	10			
7E	Extension flag	00	0	1		
7F	Checksum	3C	60	-		
SPEC. NUMBER		SPEC. TITLE				PAGE
B2014-Q011-O (3/3)		NV156FHM-N63 V8.0 Product Specification Rev. P2				34 OF 34

B2014-Q011-O (3/3)

A4(210 X 297)